


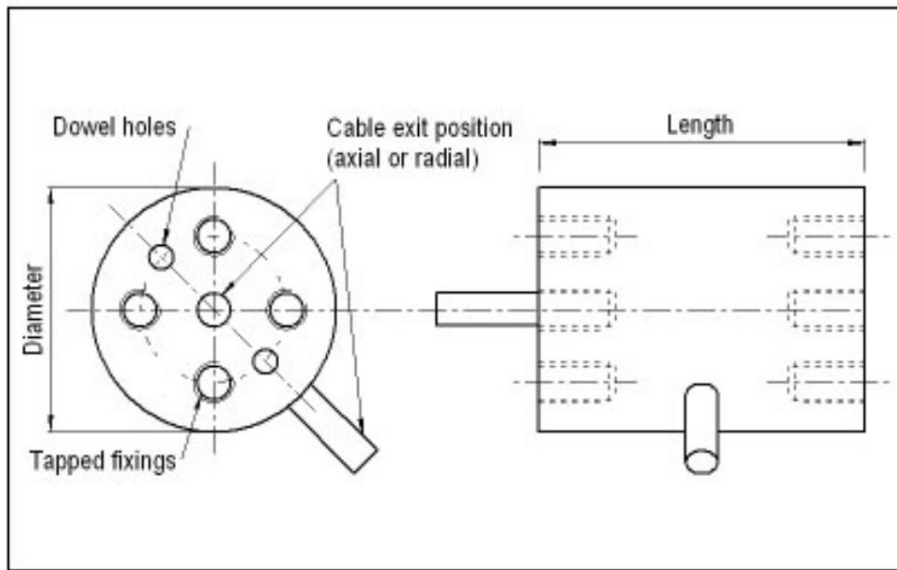

Style A

F311 Custom Static Torque Transducer

We can manufacture static torque transducers with ranges between 2Nm and 2000Nm to your specific requirements. Features

For lower ranges please see the F315. If you contact us using the "Make an enquiry" button and send it to our sales department we will respond with a quotation, usually within 24 hours. We need at least one contact number or email address to return the quotation!

Specifications

Parameter	Value	Unit
Zero load output	± 4	% RT
Temperature effect on rated output per °C	± 0.005	% AT
Temperature effect on zero load output per °C	± 0.01	% RT
Temperature range - Compensated	-10 to +50	°C
Temperature range - Safe	-10 to +80	°C
Sealing	IP65	
Cable length	2	m

Notes

- AL = Applied load.
- RL = Rated load.
- Temperature coefficients apply over the compensated range.