


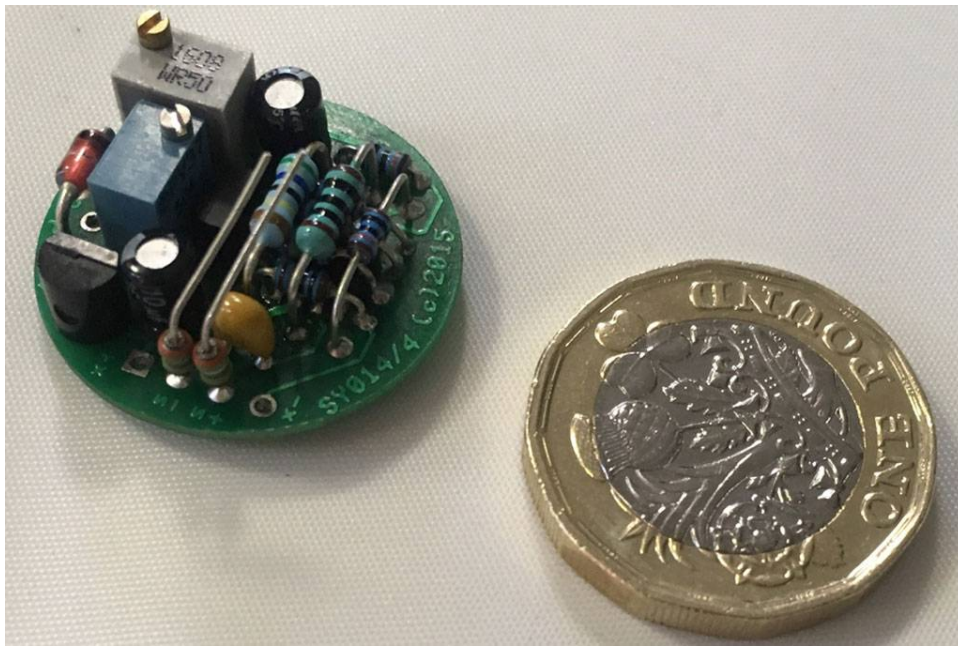

SY014 Integral Loadcell Amplifier

This loadcell amplifier is designed for mounting inside the F256 and F257 loadcells. Features

It is available in three versions, 2 wire 24V powered, 3 wire 12V powered and 3 wire 24V powered. The 2 wire version is only suitable for use with 2000ohm bridges.

On loadcells with bi-directional calibration the zero is set at 12mA.

Specifications

Parameter	Value	Unit
Output	4 to 20	mA
Non-linearity - typical	±0.05% of full range	
Supply requirements	code Q 24Vdc (2 wire)	
	code Z 12Vdc (3 wire)	
	code Y 24Vdc (3 wire)	
Operating Temperature	0 to +50	°C