




RCP/SCP Series, Standard Force Sensing Shackle Bolts

(For Crosby or Skookum Anchor & Chain Shackles)

Larger Diameter Pins Available on Request.

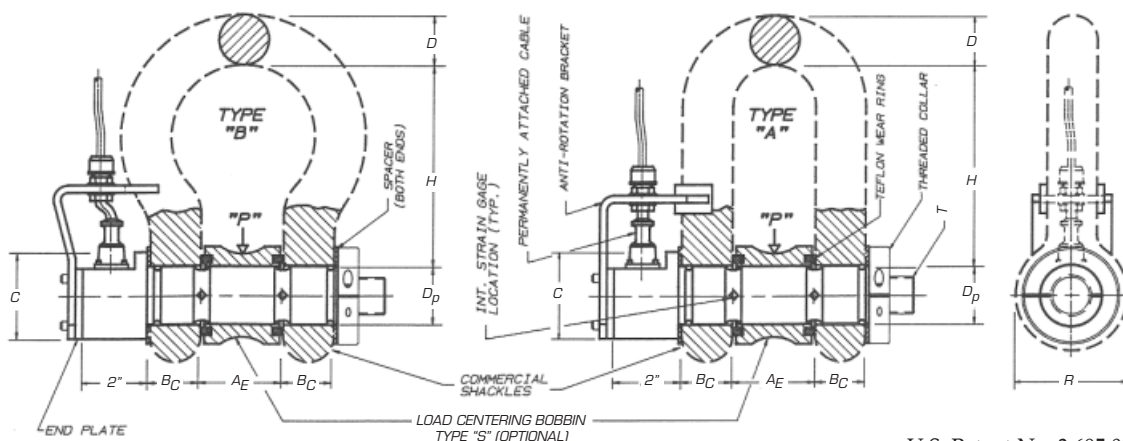


U.S. Patent No. 3,695,096

NOMENCLATURE

A_E	Shackle Opening	H	Inside Length of Shackle
B_C	Width of Shackle Ear = D	P	Load, Capacity
C	Clevis Bolt Head Diameter	R	Outside Diameter of Shackle Ear
D	Nominal Shackle Size	T	Thread Size
D_p	Nominal Shackle Bolt Diameter		

FEATURES OF STRAINERT LOAD SENSING CLEVIS BOLTS

- **EASY INSTALLATION:** RCP and SCP models replace standard Crosby or Skookum shackle bolts/pins respectively.
- **PRECISE LOAD SENSING:** Complete strain gage bridge circuit bonded and sealed inside small hole along longitudinal axis of Bolt, by exclusive Strainert process.
- **RUGGED:** Due to self protecting nature of strain gage installation sealed inside small holes. Proven immune to harsh environment.
- **ACCURACY:** Strainert Load Sensing Clevis Bolts are guaranteed to have combined error due to repeatability, non-linearity, and hysteresis of less than 1% of rated load.

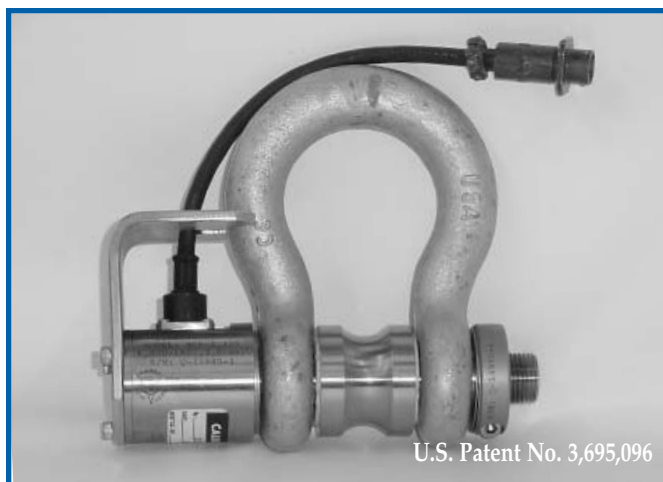

U.S. Patent No. 3,695,096

RCP SERIES, STANDARD FORCE SENSING SHACKLE BOLTS FOR CROSBY SHACKLES


MODEL NO.	SHACKLE SIZE	P CAP. LBS.	Dp DIA.	B _C /D	A _E	A _E TOL. ±	C DIA.	H		R	T	BOBBINS
								A	B			
RCP-0.437	3/8"	2,000	0.437	0.375	0.656	0.06	2.000	NONE	1.438	0.970	1/4-28 UNF	SCP-0.437-S
RCP-0.625	1/2"	4,000	0.625	0.500	0.812	0.06	2.000	1.630	1.875	1.190	1/2-20 UNF	SCP-0.625-S
RCP-0.750	5/8"	7,000	0.750	0.688	1.06	0.06	2.000	2.000	2.375	1.530	1/2-20 UNF	SCP-0.750-S
RCP-0.875	3/4"	9,500	0.875	0.813	1.25	0.06	2.000	2.380	2.813	1.880	3/4-16 UNF	SCP-0.875-S
RCP-1.000	7/8"	12,000	1.000	0.969	1.438	0.06	2.000	2.810	3.313	2.130	3/4-16 UNF	SCP-1.000-S
RCP-1.125	1"	16,000	1.125	1.000	1.69	0.06	2.000	3.188	3.750	2.375	7/8-14 UNF	SCP-1.125-S
RCP-1.250	1-1/8"	22,000	1.250	1.250	1.81	0.06	2.000	3.563	4.250	2.625	1-14 UNF	SCP-1.250-S
RCP-1.375	1-1/4"	25,000	1.375	1.375	2.03	0.06	2.000	3.938	4.688	3.000	1-14 UNF	SCP-1.375-S
RCP-1.500	1-3/8"	30,000	1.500	1.500	2.25	0.13	2.000	4.438	5.250	3.313	1-1/4-12 UNF	SCP-1.500-S
RCP-1.625	1-1/2"	32,000	1.625	1.625	2.38	0.13	2.000	4.875	5.750	3.625	1-1/4-12 UNF	SCP-1.625-S
RCP-2.000	1-3/4"	50,000	2.000	2.125	2.88	0.13	2.500	5.750	7.000	4.313	1-1/2-12 UN	SCP-2.000-S
RCP-2.250	2"	65,000	2.250	2.406	3.25	0.13	2.750	6.750	7.750	5.000	1-3/4-16 UNF	SCP-2.250-S
RCP-2.750	2-1/2"	100,000	2.750	3.125	4.13	0.25	3.250	8.000	10.500	6.000	2-12 UN	SCP-2.750-S
RCP-3.250	3"	150,000	3.250	3.625	5.00	0.25	3.750	8.500	13.000	6.500	1-1/2-12 UNF	SCP-3.250-S
RCP-3.750	3-1/2"	180,000	3.750	4.125	5.25	0.25	4.375	NONE	14.625	8.000	3-12 UN	SCP-3.750-S
RCP-4.250	4"	220,000	4.250	4.563	5.50	0.25	4.875	NONE	14.500	9.000	3-1/2-12 UN	SCP-4.250-S

SCP SERIES, STANDARD FORCE SENSING SHACKLE BOLTS FOR SKOOKUM SHACKLES

MODEL NO.	SHACKLE SIZE	P CAP. LBS.	Dp DIA.	A _E	A _E TOL. ±	C DIA.	H		R	T	BOBBINS
							A	B			
SCP-0.625	1/2"	4,000	0.625	0.812	0.06	2.000	NONE	2.219	1.438	1/2-20 UNF	SCP-0.625-S
SCP-0.875	3/4"	9,500	0.875	1.25	0.06	2.000	NONE	2.875	1.848	3/4-16 UNF	SCP-0.875-S
SCP-1.000	7/8"	12,000	1.000	1.438	0.06	2.000	NONE	3.125	2.125	3/4-16 UNF	SCP-1.000-S
SCP-1.125	1"	16,000	1.125	1.438	0.06	2.000	3.250	3.750	2.250	7/8-14 UNF	SCP-1.125-S
SCP-1.250	1-1/8"	22,000	1.250	1.81	0.13	2.000	3.563	4.250	2.625	1-14 UNF	SCP-1.250-S
SCP-1.375	1-1/4"	25,000	1.375	2.03	0.13	2.000	4.250	4.688	2.875	1-14 UNF	SCP-1.375-S
SCP-1.625	1-1/2"	32,000	1.625	2.38	0.13	2.000	5.000	6.000	3.438	1-1/4-12 UNF	SCP-1.625-S
SCP-2.000	1-3/4"	50,000	2.000	2.88	0.13	2.500	5.750	7.000	4.500	1-1/2-12 UN	SCP-2.000-S
SCP-2.250	2"	65,000	2.250	3.25	0.13	2.750	6.500	7.125	5.125	1-3/4-16 UNF	SCP-2.250-S
SCP-2.750	2-1/2"	100,000	2.750	4.13	0.13	3.250	8.125	11.000	6.125	2-12 UN	SCP-2.750-S
SCP-3.250	3"	150,000	3.250	5.13	0.13	3.750	7.063	13.000	6.500	1-1/2-12 UNF	SCP-3.250-S
SCP-3.750	3-1/2"	180,000	3.750	5.75	0.25	4.375	NONE	15.000	8.000	3-12 UN	SCP-3.750-S
SCP-4.250	4"	220,000	4.250	6.50	0.25	4.875	NONE	17.000	9.000	3-1/2-12 UN	SCP-4.250-S

ORDERING INFORMATION

RCP-1.250 - B

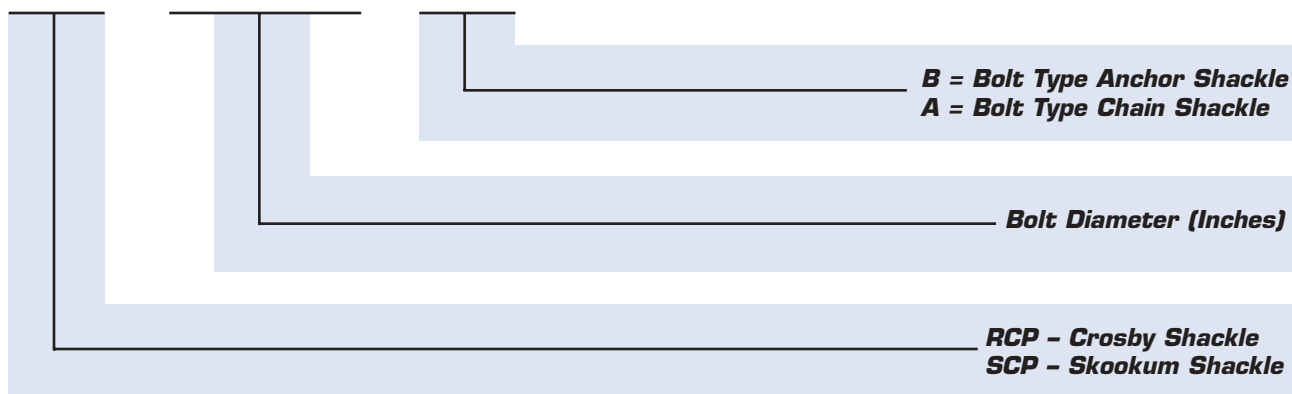

Bobbin (Ordered Separately) SCP-1.250-S (See Accessories)

Standard Models include Modulus & Temperature Compensation, and Detailed Calibration Data (LO) (See Calibration Section).