

## 4-CORE SPECIAL LOAD CELL CONNECTION CABLE




This specialist polyurethane 4-core cable is an ideal solution for connecting a junction box to a load cell amplifier/indicator/transmitter.

It provides premium protection of the sensitive internal cores and provides optimum conditions for signal transmission. As well as being extremely tough, the halogen free polyurethane outer sheath has a high resistance to cuts, chemical attack, ultraviolet light, temperature changes and rodents.

- Tinned copper conductors, 7/0.2mm
- Halogen free polyurethane outer sheath
- 4-core plus shield
- Service temperature -30°C to +90°C
- Conductor cross-section 0.22mm<sup>2</sup>
- Cross-linked polyethylene (XLPE) insulation

# CABLE CA-PU-5.7MM

technical specification...

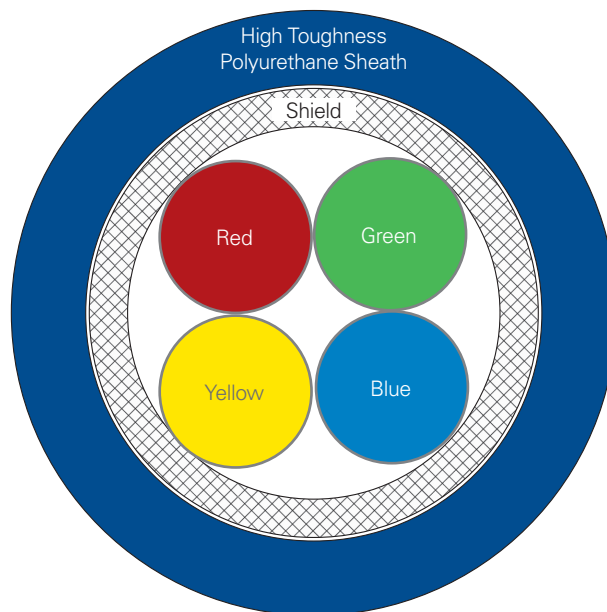

## CABLE CA-PU-5.7MM

| Construction materials and colour coding |                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Conductors</b>                        | Tinned copper wire, 7/0.2mm, section 0.22mm <sup>2</sup>                                                                                                                                                                                                                                                                                                                  |
| <b>Insulation</b>                        | XLPE cross-linked polyethylene, nominal thickness 0.3mm, nominal diameter 1.2mm.<br>Colour codes and RAL numbers: <ul style="list-style-type: none"><li>• RED: +ve input to load cell (RAL 3000)</li><li>• BLUE: -ve input to load cell (RAL 5015)</li><li>• GREEN: +ve output from load cell (RAL 6018)</li><li>• YELLOW: -ve output from load cell (RAL 1021)</li></ul> |
| <b>Wiring arrangement</b>                | 4 conductors in concentric rings, with shield (polyester tape; aluminium 23/9 µm). Minimum overlap 20%.                                                                                                                                                                                                                                                                   |
| <b>Sheath</b>                            | Halogen free polyurethane, nominal diameter 6.3mm, BLUE RAL 5010                                                                                                                                                                                                                                                                                                          |

| Operating characteristics                   |                |
|---------------------------------------------|----------------|
| <b>Service temperature range</b>            | -30°C to +90°C |
| <b>Conductor resistance (max.) at 20°C</b>  | 89.9 Ω/km      |
| <b>Cable weight</b>                         | 44.6 kg/km     |
| <b>Insulation resistance (min.) at 20°C</b> | 5000 MΩ·km     |
| <b>Nominal capacitance</b>                  | 115 pF/m       |
| <b>Nominal inductance</b>                   | 0.8 mH/km      |

DISTRIBUTED BY:



### THAMES SIDE SENSORS LTD

Unit 10, io Trade Centre, Deacon Way,  
Reading, Berkshire RG30 6AZ

**tel:** +44 (0) 118 941 1387

**fax:** +44 (0) 118 941 2004

[sales@thames-side.co.uk](mailto:sales@thames-side.co.uk)

[www.thames-side.com](http://www.thames-side.com)

Issue: CA-PU-5.7MM.06.17



Our policy is one of continuous product enhancement. We therefore reserve the right to incorporate technical modifications without prior notification.

[www.thames-side.com](http://www.thames-side.com)