

# ALUMINIUM SINGLE POINT LOAD CELL

*capacities 50kg - 1000kg*




The T18 single point load cell is manufactured from high quality aluminium alloy. Its design allows for high accuracy weight measurement with off-centre loads. It's potted and sealed to IP67.

Typical applications include: single point platforms up to 800 x 800mm in size, buckets and hoppers supported by a single load cell, bagging & dosing machines, filling scales and checkweighers.

- High quality aluminium alloy load sensor
- Excellent accuracy with off-centre loads
- Potted and sealed to IP67
- Integrated on-centre overload protection (must be set at 150%  $E_{max}$  or less)
- Combined error  $< \pm 0.03\%$
- 2 Year Warranty
- 800 x 800mm maximum platform size (load cell placed centrally under the platform)

# T18

## technical specification...

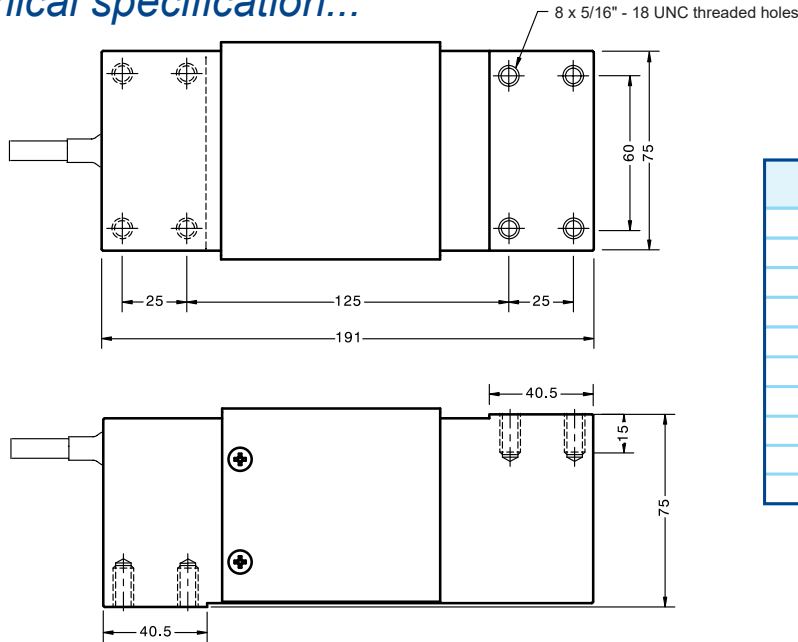


| Nominal Capacity | Minimum load cell verification interval (V <sub>min</sub> ) |
|------------------|-------------------------------------------------------------|
| 50 kg            | 3.3 g                                                       |
| 75 kg            | 5 g                                                         |
| 100 kg           | 6.7 g                                                       |
| 150 kg           | 10 g                                                        |
| 200 kg           | 13.3 g                                                      |
| 250 kg           | 16.7 g                                                      |
| 300 kg           | 20 g                                                        |
| 500 kg           | 33.3 g                                                      |
| 635 kg           | 42 g                                                        |
| 1000 kg          | 67 g                                                        |

### T18 Load Cell

|                                                                                    | Load cell specification                         | Units                |
|------------------------------------------------------------------------------------|-------------------------------------------------|----------------------|
| Load Cell Capacities (E <sub>max</sub> )                                           | 50, 75, 100, 150, 200, 250, 300, 500, 635, 1000 | kg                   |
| Rated Output (S <sub>n</sub> )                                                     | 2 ± 0.10%                                       | mV/V                 |
| Combined Error                                                                     | < ± 0.03                                        | %S <sub>n</sub>      |
| Non-Repeatability                                                                  | < ± 0.01                                        | %S <sub>n</sub>      |
| Creep (30 minutes)                                                                 | < ± 0.02                                        | %S <sub>n</sub>      |
| Minimum load cell verification interval (V <sub>min</sub> ) = E <sub>max</sub> / Y | See table above                                 | -                    |
| Temperature Effect on Span                                                         | < ± 0.0012                                      | %S <sub>n</sub> / °C |
| Temperature Effect on Zero Balance                                                 | < ± 0.002                                       | %S <sub>n</sub> / °C |
| Compensated Temperature Range                                                      | -10 to +40                                      | °C                   |
| Operating Temperature Range                                                        | -20 to +70                                      | °C                   |
| Safe Overload                                                                      | 150                                             | %E <sub>max</sub> *  |
| Ultimate Overload                                                                  | 200                                             | %E <sub>max</sub> *  |
| Zero Balance                                                                       | < ± 2                                           | %S <sub>n</sub>      |
| Input Resistance                                                                   | 415 ± 15                                        | Ω                    |
| Output Resistance                                                                  | 350 ± 3                                         | Ω                    |
| Insulation Resistance                                                              | > 5000                                          | MΩ @ 100V            |
| Recommended Supply Voltage                                                         | 5 - 15                                          | V                    |
| Maximum Supply Voltage                                                             | 15                                              | V                    |
| Environmental Protection                                                           | IP67                                            | -                    |
| Maximum Deflection at E <sub>max</sub>                                             | 0.3 - 0.5                                       | mm                   |
| Cable Material                                                                     | PVC                                             | -                    |
| Cable Length                                                                       | 3.1                                             | m                    |
| Nominal Shipping Weight                                                            | 3.2                                             | kg                   |

\* Load limit applies to central loads only. Load limit for off-centre loads will be lower.

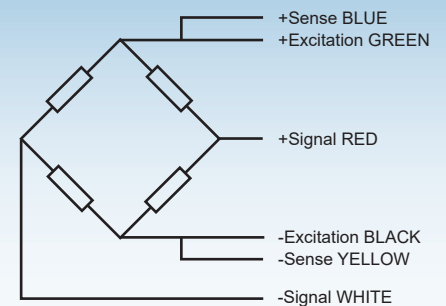

#### Electrical Connections

Via 6 wire, 6mm diameter, screened PVC cable.  
Screen not connected electrically to load cell.

#### Construction

Load cell manufactured from high quality aluminium (aluminium) alloy.

DISTRIBUTED BY:

### Thames Side Sensors Ltd

Unit 10, io Trade Centre, Deacon Way,  
Reading, Berkshire RG30 6AZ, UK  
tel: +44 (0) 118 941 1387  
sales@thames-side.co.uk  
[www.thames-side.com](http://www.thames-side.com)



Issue: EN/T18.05.26

Our policy is one of continuous product enhancement. We therefore reserve the right to incorporate technical modifications without prior notification.

