

STACKABLE DIN RAIL MOUNTED WEIGHING INDICATOR AND HIGH SPEED TRANSMITTER



Incorporating the latest up-to-date electronics, the Model XT3000 is a space-saving high performance display indicator and high speed data transmitter suitable for static and dynamic weighing. It is specially designed for process weighing systems, as well as all types of machinery with weighing as part of their functions.

Typical applications include: weighing and level measurement of tanks and silos, filling and dosing machines, checkweighers, animal weighing, high speed sorting scales and multihead weighers. The XT3000 is ideal for check-weighing (and other dynamic applications) thanks to the integrated checkweigher mode and the fast data capture rate of 2400 measurements/second.

Fast start-up and commissioning can be accomplished easily using Windows PC software. Calibration is possible either with real weights or by using the load cell sensitivity in mV/V (theoretical calibration).


The XT3000 is approved according to OIML R76 and EN 45501 as a Non-Automatic Weighing Instrument.

Four versions are available: the basic version has digital I/O, RS232 and RS485 communications; 3 further versions and either analog outputs, PROFINET or Ethernet/IP protocols.

- Bright 6 digit 7mm LED display
- High resolution with 24-bit ADC and 16 000 000 internal divisions
- 2400 measurement per second
- Configuration and callibration using PC software or integral keypad
- Callibration protection by software
- Powers up to 8 X 50Ω or 16 X 700Ω load cells
- RS232 and RS485 (Modbus RU and ASCII) and optional PROFINE or Ethernet/IP
- Configurable analog output: 0-5V, 0-10V, 0-20mA and 4-20mA with galvanic isolation
- 3 digital opto-isolated inputs and 4 digital outputs to relay
- Stackable DIL/Omega rail mounting
- 10-28 V DC power supply. Optional AC-to-DC adapter available (DIN rail mounted).

XT3000

technical specification...

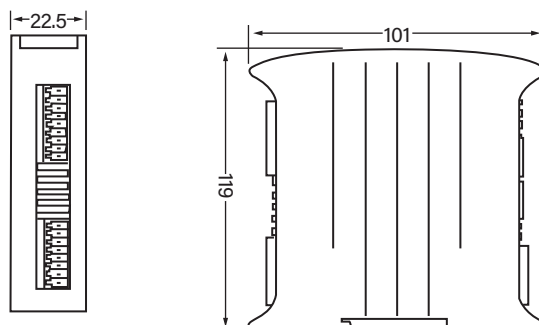

All dimensions in mm.

XT3000 Indicator / Transmitter

Load Cell Connection	
Load cell sensitivity range	± 3.9 mV/V
Resolution	ADC 24-bit; 16 000 000 internal divisions Display -99 999 to 999 999
Measuring rate	Internal: 2400 readings per second Transmission: 600 readings per second
Linearity error	≤ 0.01% of measuring range
Thermal Stability	Zero: 150 nV / °C max. Span: 3.5 ppm / °C max.
Load cell excitation voltage	5.0 V DC
Minimum load cell resistance	43Ω (8 load cells of 350Ω or 16 load cells of 700Ω)

Inputs & Outputs	
Serial communications	RS-232 bi-directional
	RS-485 half-duplex
	Protocol: Own protocol, Modbus (RTU & ASCII)
	Transmission rates: 4800 to 115200 bauds selectable
Logic inputs	3 opto-isolated inputs with status LED
Logic outputs	4 relay outputs max. 30V AC – 30V DC, 100mA with status LED
Analog Output (XT3000-SO-AN version)	Output with galvanic isolation, DAC of 16 bits Output voltage: 0-10V Output current: 0/4 - 20mA (<500Ω)
PROFINET communication (XT3000-SO-PN version)	PROFINET I/O Real-time (Class A)
Ethernet/IP communication (XT3000-SO-ETHERNET-IP-version)	Ethernet/IP

Additional Data	
Power Supply	10V to 28V DC
Power Consumption	4W maximum (6W for PROFINET and Ethernet/IP versions)
Operating temperature range	-20 °C to 50 °C
Storage temperature range	-25 °C to 60 °C
Nominal shipping weight	0.25kg
Mounting	DIN rail, IP40
Operator interface	Keyboard: 5 keys Display: 6 digit LED, 10mm high
	With serial outputs only (model XT3000-SO)
	With serial and analog outputs (model XT3000-SO-AN)
	With serial outputs and PROFINET communications (XT3000-SO-PN)
	With serial outputs and Ethernet/IP communications (XT3000-SO-ETHERNET-I)
Approvals	OIML R76 EN 45501: 2015
	DIN rail mount power supply Universal voltage 100-240V AC 50/60Hz 24V DC output Maximum Power 15W, capable of driving 3 off XT3000 units (-SO and -SO-AN versions or 2 off XT3000 units (-SO-PN and -SO-ETHERNET-IP versions). Part Number is XT-PS. Shipping weight 0.1 kg.

DISTRIBUTED BY:



THAMES SIDE SENSORS LTD

Unit 10, io Trade Centre, Deacon Way,
Reading, Berkshire RG30 6AZ, UK

tel: +44 (0) 118 941 1387

sales@thames-side.co.uk

www.thames-side.com



Issue: EN/XT3000.04.26

Our policy is one of continuous product enhancement. We therefore reserve the right to incorporate technical modifications without prior notification.



www.thames-side.com