

HIGH CAPACITY LOAD CELL ASSEMBLY FOR SILO, TANK AND HOPPER WEIGHING

capacity 50t



Image shows T45 load cell installed within LA45 mounting accessory

The T45 with LA45 Load Cell Assembly is specifically designed as a reliable, simple, low cost solution to your weighing challenges.

The nickel plated alloy steel T45 load cell is mounted within the low profile zinc plated alloy steel LA45 mounting accessory, which has integrated protection against side loads, end loads and lift-off loads. Also included is an allowance for angular misalignment, which is often present in welded metal structures such as silos, tanks or support frames. The wide operating temperature range and protection to IP67 makes the T45 load cell ideal for use in many regions and climates. The durable, tough, shielded 10m Polyurethane cable has high resistance to cuts, impacts, chemical attack and UV radiation. A cable of length 20m is available on request.


Installation is simple and fast, making the T45/LA45 Load Cell Assembly an excellent weighing solution with a very good price/quality ratio.

- Durable nickel plated steel load cell
- Robust zinc plated steel mounting accessory
- Integrated protection against lift-off, side and end loads
- Allows for thermal expansion and contraction of vessel
- IP67 protection rating
- Allows for angular misalignment
- 5 Year Warranty
- Durable Polyurethane cable with high resistance to chemicals, impacts and UV radiation
- Wide operating temperature range
- Excellent price/quality ratio



T45 with LA45

technical specification...

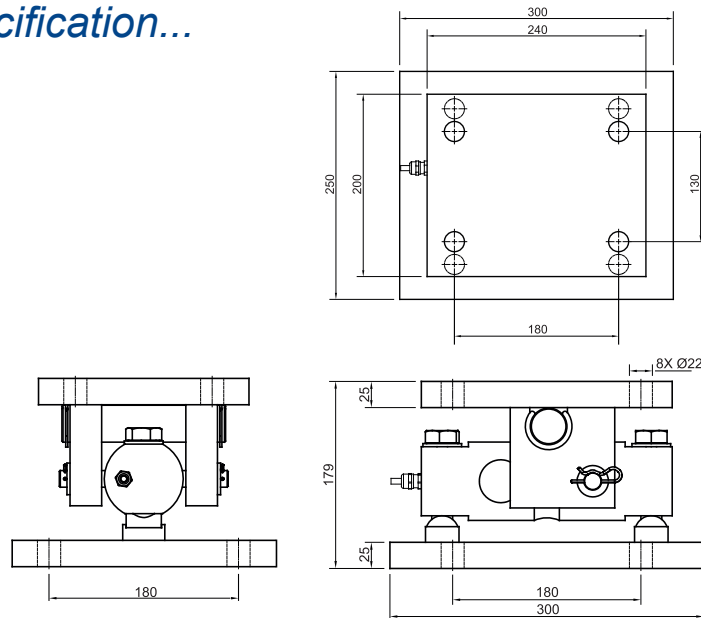

T45 Load Cell


	Load cell specification	Units
Load Cell Capacities (E_{max})	50	tonnes (t)
Rated Output (S_n)	$2 \pm 0.25\%$	mV/V
Combined Error	$< \pm 0.05$	$\%S_n$
Non-Repeatability	$< \pm 0.015$	$\%S_n$
Creep (30 minutes)	$< \pm 0.048$	$\%S_n$
Minimum load cell verification interval (v_{min}) = E_{max} / Y	$E_{max} / 10000$	-
Temperature Effect on Zero Balance	$< \pm 0.002$	$\%S_n / ^\circ C$
Temperature Effect on Span	$< \pm 0.0036$	$\%S_n / ^\circ C$
Compensated Temperature Range	-10 to +40	$^\circ C$
Operating Temperature Range	-30 to +70	$^\circ C$
Safe Overload	150	$\%E_{max}$
Ultimate Overload	240	$\%E_{max}$
Zero Balance	± 2	$\%S_n$
Input Resistance	400 ± 20	Ω
Output Resistance	350 ± 3	Ω
Insulation Resistance	5000	M Ω @ 100V
Recommended Supply Voltage	5 - 15	V
Maximum Supply Voltage	15	V
Environmental Protection	IP67	-
Maximum Deflection at E_{max}	0.5	mm
Cable Material	Polyurethane	-
Cable Length	10**	m
Nominal Shipping Weight	T45 Load Cell	7.5 kg
	LA45 Mounting Accessory	15.8 kg

**Option of 20m cable (on request and manufactured to order)

Load Limits: LA45 Mounting Accessory with T45 Load Cell

End Load Limit, kg	Transverse (Side) Load Limit, kg	Upward (Lift-off) Load Limit, kg
7851	3772	17539

DISTRIBUTED BY:

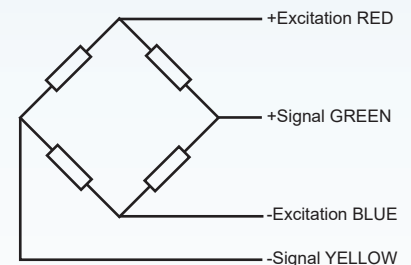

Electrical Connections

Via 4 core, 6mm diameter, screened Polyurethane cable (halogen-free)

Screen not connected electrically to load cell.

Construction

Load cell T45-50T

High Strength alloy steel, nickel plated

Mounting accessory LA45-50T-Z

- Upper and lower plates: high strength alloy steel, durable zinc plated finish
- Pins: high strength alloy steel, durable zinc plated finish
- Seeger rings / E-clips / Circlips: alloy steel, durable blue finish
- R-clips: alloy steel, durable zinc plated finish

Thames Side Sensors Ltd

Unit 10, io Trade Centre, Deacon Way, Reading, Berkshire RG30 6AZ, UK

tel: +44 (0) 118 941 1387

sales@thames-side.co.uk

www.thames-side.com

Issue: EN/T45.06.26



Our policy is one of continuous product enhancement. We therefore reserve the right to incorporate technical modifications without prior notification.



www.thames-side.com