

BENDING BEAM LOAD CELL FOR HARSH INDUSTRIAL ENVIRONMENTS

capacities 5kg - 500kg



This fully welded stainless steel bending beam load cell is fully welded and hermetically sealed to IP68 and IP69K and can be used in the harshest industrial environments. It is suitable for weighing platforms, bag fillers, belt weighers and tank weighing in the Food Processing, Chemical, Pharmaceutical and general Bulk Handling industries.

OIML C3 or C6 approved versions are available. A 6 wire cable (with sense wires) is supplied as standard.

As an option, T66 load cells are available with dual-labelled ATEX and IECEx certification for all Gas and Dust zones. The certification for Dust zones 20, 21 and 22 does not require safety barriers, saving a significant amount of money.


For applications in aggressive environments where stress corrosion or acid attack is an issue, a special Parylene coating can be specified as an option. Another option is a high temperature variant for continuous operation in environments up to 150°C.

- Stainless steel construction
- Fully welded and hermetically sealed
- High durability Polyurethane cable
- IP68 and IP69K Protection
- 3000 divisions OIML R60 Class C
- Option: 6000 divisions OIML R60 Class C
- 5 year warranty
- Option: 4 wire version (made to order)
- Option: high temperature version
- Option:  and  version
- Option: special Parylene coating



T66

technical specification...

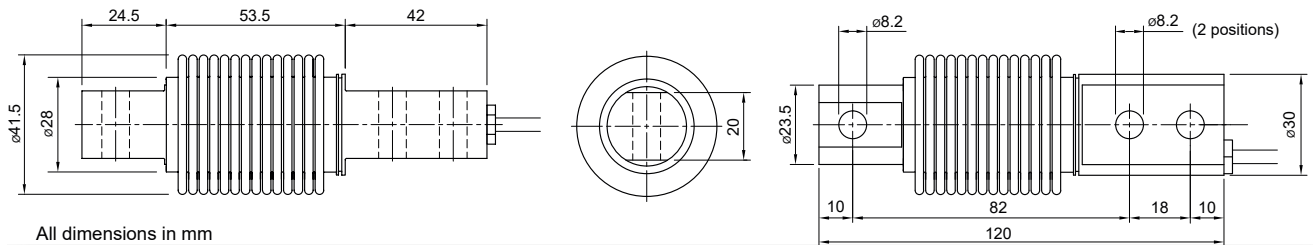


All dimensions in mm

Model T66 ATEX and IECEx Certification

Certification Type	EX Marking	Application
ATEX	II 1 GD	Gas Zones 0, 1, 2 with safety barriers (Ex ia)
	Ex ia II C T4 to T6 Ga	Dust zones 20, 21, 22 without safety barriers (Ex ia)
	Ex ia IIIC T135°C to T85°C Da	
IECEx	Ex ia IIIC T4..T6 Ga	Gas Zones 0, 1, 2 with safety barriers (Ex ia)
	Ex ia IIIC T200 85°C Da	
	Ex ta IIIC T200 85°C Da (-20°C ≤ Tamb ≤ 40°C)	Dust zones 20, 21, 22 without safety barriers (Ex ia)
	Ex ta IIIC T200 105°C Da (-20°C ≤ Tamb ≤ 60°C)	
	Ex ec IIC T6 Gc	Gas Zones 2 without safety barriers (Ex ec)
	Ex tc IIIC T85°C Dc (-20 °C ≤ Tamb ≤ 60 °C)	Dust zones 22 without safety barriers (Ex tc)

6 Wire Connection (C3 or C6)

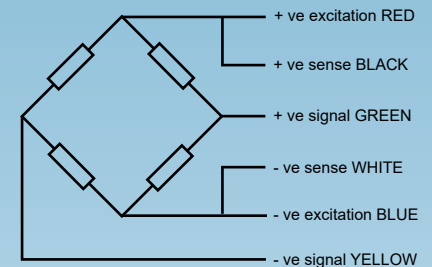


T66 Load Cell

	Load cell specification		Unit
Accuracy Class	3000 (See Note 1)	6000	n.OIML
Load Cell Capacity (E_{max})	5, 10, 20, 30, 50, 75, 100, 150, 200, 250, 300, 500	50, 75, 100, 150, 200, 250	kg
Rated Output (S_n)	2		mV/V ± 0.1 %**
Combined Error	< ± 0.017	< ± 0.008	% S_n
Non-repeatability	< ± 0.015	< ± 0.01	% S_n
Minimum load cell verification interval (V_{min}) = E_{max} / Y	$E_{max} / 10000$	$E_{max} / 18000$	kg
Creep (30 minutes)	< ± 0.016	< ± 0.008	% S_n
Temperature Effect on Zero Balance	< ± 0.002	< ± 0.001	% S_n / °C
Temperature Effect on Span	< ± 0.0012	< ± 0.0006	% S_n / °C
Compensated Temperature Range	-10 to +40		°C
Operating Temperature Range	-30 to +70		°C
Safe Overload	200		% E_{max}
Ultimate Overload	300		% E_{max}
Zero Balance	< ± 2		% S_n
Input Resistance	400 ± 20		Ω
Output Resistance	350 ± 3		Ω
Insulation Resistance	> 5000		MΩ @ 100V
Recommended Supply Voltage	5-15		V
Maximum Supply Voltage	15		V
Environmental Protection	IP68 and IP69K		-
Maximum deflection at E_{max}	0.2-0.4		mm
Cable Length	3		m
Cable Material	Polyurethane		-
Nominal Shipping Weight	0.5		kg

1. OIML C3 (3000 division) approval from 10-250kg

** For 5-20kg capacity range, rated output (S_n) tolerance is ± 0.2 %

4 Wire Connection (C3 only) – on request

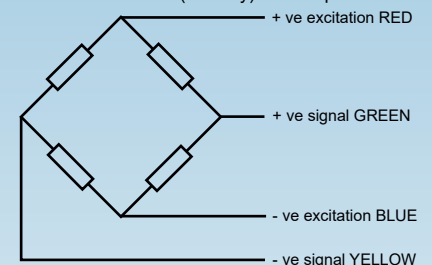

Electrical Connections

Via 6 wire, 5.7mm diameter, screened polyurethane cable.
Optionally, the OIML C3 version is available with 4 wire cable.
Screen not connected electrically to load cell.

Construction

Load cell manufactured from stainless steel.

Mounting Options

- Stainless steel baseplate LA66-BASEPLATE (5-300kg capacities)
- Anti-Vibration Assembly LA66-SILENTBLOCK-50KG (5-50kg capacities) or LA66-SILENTBLOCK-300KG (75-300kg capacities)
- LeverMount® Lite mounting accessory LEVERMOUNT-LITE (5-200kg capacities)
- Tension Accessory LA66-TENSION and rod end bearings LA66-REB (all capacities)

DISTRIBUTED BY:



THAMES SIDE SENSORS LTD

Unit 10, io Trade Centre, Deacon Way, Reading, Berkshire RG30 6AZ, UK

tel: +44 (0) 118 941 1387

sales@thames-side.co.uk

www.thames-side.com



Issue: EN/T66.05.26

Our policy is one of continuous product enhancement. We therefore reserve the right to incorporate technical modifications without prior notification.

