


SHEAR BEAM LOAD CELL FOR PLATFORM SCALES IN HARSH ENVIRONMENTS

capacities 300kg - 2000kg

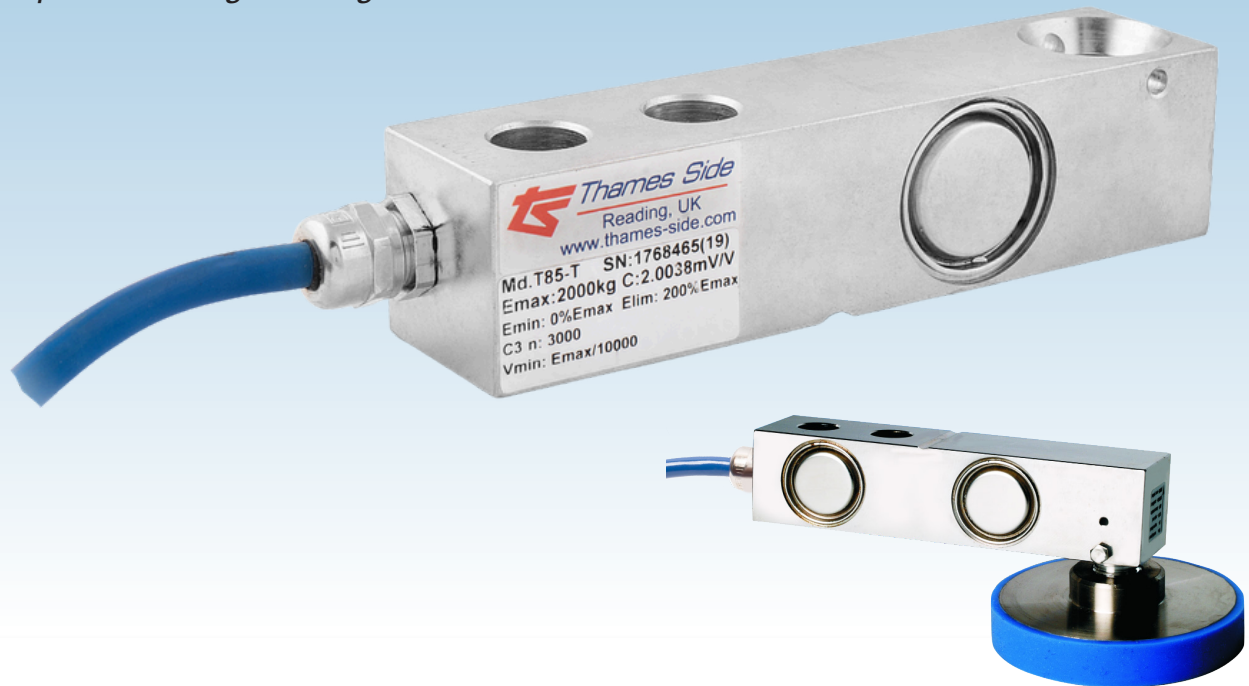

Load foot is optional and ordered separately.

The T85-T stainless steel shear beam load cell is fully welded and hermetically sealed to IP68/IP69K and has been designed for use in high accuracy multi-cell platform scales in the harshest industrial environments. Calibration in mV/V/Ω (by output current matching) minimises the need for time consuming corner correction. The T85-T is approved to OIML R60 Class C3, with a blind loading hole and a durable polyurethane cable. Polyurethane cables provide greater resistance than PVC cables to chemicals, UV radiation, temperature changes and impacts.

For high accuracy platform scale applications, the T85-T can be used with the stainless steel load foot T85-T-FOOT-35916 (ordered separately).

As an option, T85-T load cells are available with dual-labelled ATEX and IECEx certification for all Gas and Dust zones. The certification for ATEX and IECEx dust zones 20, 21 and 22, and IECEx gas zone 2, does not require safety barriers, which creates a large cost saving.


For applications in aggressive environment where stress corrosion or acid attack is an issue, a special Parylene coating can be specified as an option to provide greater protection of the load cell.

For high temperature applications, an optional version of the T85-T is available for operation in environments up to 150°C (continuous temperature).

- Stainless steel construction
- 3000 divisions (Class C3) OIML R60 approval
- Calibrated in mV/V/Ω
- 5 year warranty
- High quality stainless steel cable entry
- Industry standard dimensions and specifications
- Option of  and  approval or Parylene coating or high temperature version
- Wide operating temperature range


T85-T

technical specification...

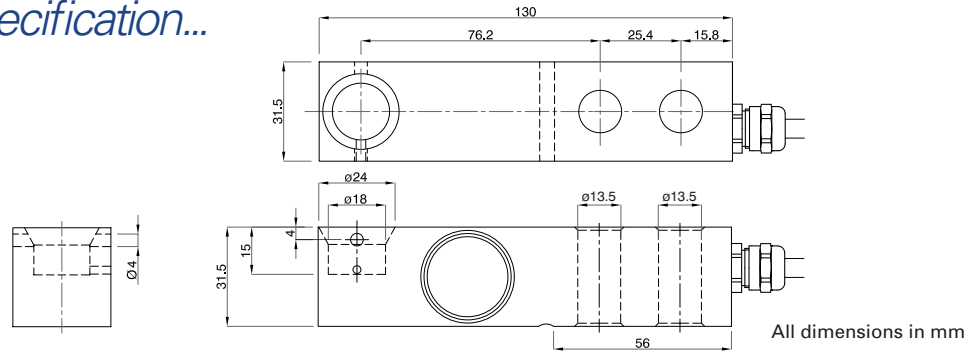

T85-T ATEX and IECEx Certification

Certification Type	EX Marking	Zone Application
ATEX	II 1 GD	Gas zones 0, 1, 2 with safety barriers (Ex ia)
	Ex ia IIC T4...T6 Ga	Dust zones 20, 21, 22 without safety barriers (Ex ta)
	Ex ia IIIC T85°C Da	
	Ex ta IIIC T85°C Da	
IECEx	Ex ia IIC T4...T6 Ga	Dust zones 20, 21, 22 with safety barriers (Ex ia)
	Ex ia IIIC T200 85°C Da	
	Ex ta IIIC T200 85°C Da (-20°C ≤ Tamb ≤ 40°C)	Dust zones 20, 21, 22 without safety barriers (Ex ta)
	Ex ta IIIC T200 105°C Da (-20°C ≤ Tamb ≤ 60°C)	
	Ex ec IIC T6 Gc	Gas zone 2 without safety barriers (Ex ec)
	Ex tc IIIC T85°C Dc (-20°C ≤ Tamb ≤ 60°C)	Dust zone 22 without safety barriers (Ex tc)

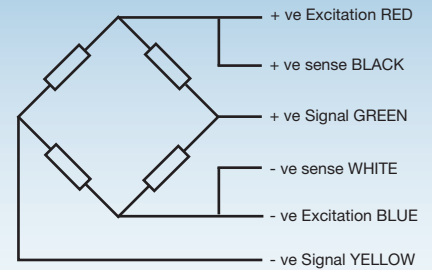

T85-T Load Cell

	Load cell specification	Units
Load Cell Capacity (E_{max})	300, 500, 750, 1000, 1500, 2000	kg
Rated Output (S_n)	2	mV/V *
Accuracy Class according to OIML R60: number of verification intervals (n)	3000	n.OIML
Combined Error	$< \pm 0.017$	% S_n
Non-repeatability	$< \pm 0.015$	% S_n
Minimum load cell verification interval (V_{min}) = E_{max} / Y	$E_{max} / 10000$	kg
Creep (30 minutes)	$< \pm 0.016$	% S_n
Temperature Effect on Zero Balance	$< \pm 0.002$	% $S_n / ^\circ C$
Temperature Effect on Span	$< \pm 0.0012$	% $S_n / ^\circ C$
Compensated Temperature Range	-10 to +40	$^\circ C$
Operating Temperature Range	-30 to +70	$^\circ C$
Safe Load Limit (E_{lim})	200	% E_{max}
Zero Balance	$< \pm 2$	% S_n
Input Resistance	400 ± 20	Ω
Output Resistance	350 ± 3	Ω
Insulation Resistance	> 5000	M Ω @ 100V
Recommended Supply Voltage	5 - 15	V
Maximum Supply Voltage	15	V
Environmental protection according to EN 60529	IP68 ; IP69K	-
Cable Length	5	m
Cable Material	Polyurethane	-
Maximum deflection at E_{max}	0.2-0.4	mm
Nominal Shipping Weight	0.9	kg

* Pre-corner adjustment optimised at $\pm 0.05\%$ by output current calibration

Electrical Connections

Via 6 core, 5.7mm diameter, screened polyurethane cable.
Screen not connected electrically to load cell.

Optional item

Stainless steel/rubber load foot for use with platform scales.
Includes spherical joint and height adjustment.
Part number T85-T-FOOT-35916

DISTRIBUTED BY:



THAMES SIDE SENSORS LTD

Unit 10, io Trade Centre, Deacon Way,
Reading, Berkshire RG30 6AZ

tel: +44 (0) 118 941 1387

sales@thames-side.co.uk
www.thames-side.com

Issue: EN/T85-T.05.26



Our policy is one of continuous product enhancement. We therefore reserve the right to incorporate technical modifications without prior notification.



www.thames-side.com