


XT960 LOAD CELL AMPLIFIER

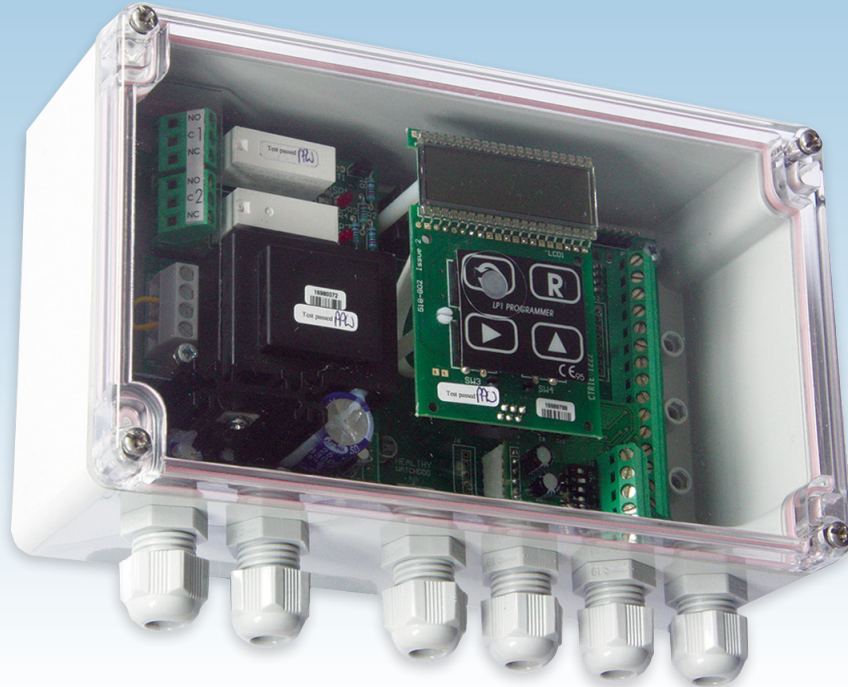


The XT960 load cell amplifier is available in surface mount form, with an ABS, Stainless Steel or Die Cast case (all rated to IP65). Operating from AC or DC power and providing 4-20mA and 0-10V analogue outputs as standard, the amplifier can be calibrated in one-pass and set up for use quickly. Options consist of 2 relay set points, RS232 and RS485 communications and a transparent plastic lid to view the LCD display from outside the enclosure. The unit can accommodate both 4-wire and 6-wire load cells.

3 configurable digital inputs are available, for e.g. auto-tare, print, peak hold, reset or other functions.

- Internal 4.5 digit LCD digital display
- Digital programming and calibration
- Simple, one-pass calibration
- 5 volts @ 160 mA excitation, to drive up to 10 x 350 Ohm load cells
- IP65 surface mounting ABS case (Stainless Steel and Die Cast options available)
- Load cell sensitivity range 0.5 to 7.8 mV/V (in 2 ranges configured from keypad)
- Operates on 110-120 VAC, 220-230 VAC or 9-32 VDC
- 20 year data retention for set up values; minimum of 100000 write cycles

XT960

technical specification...

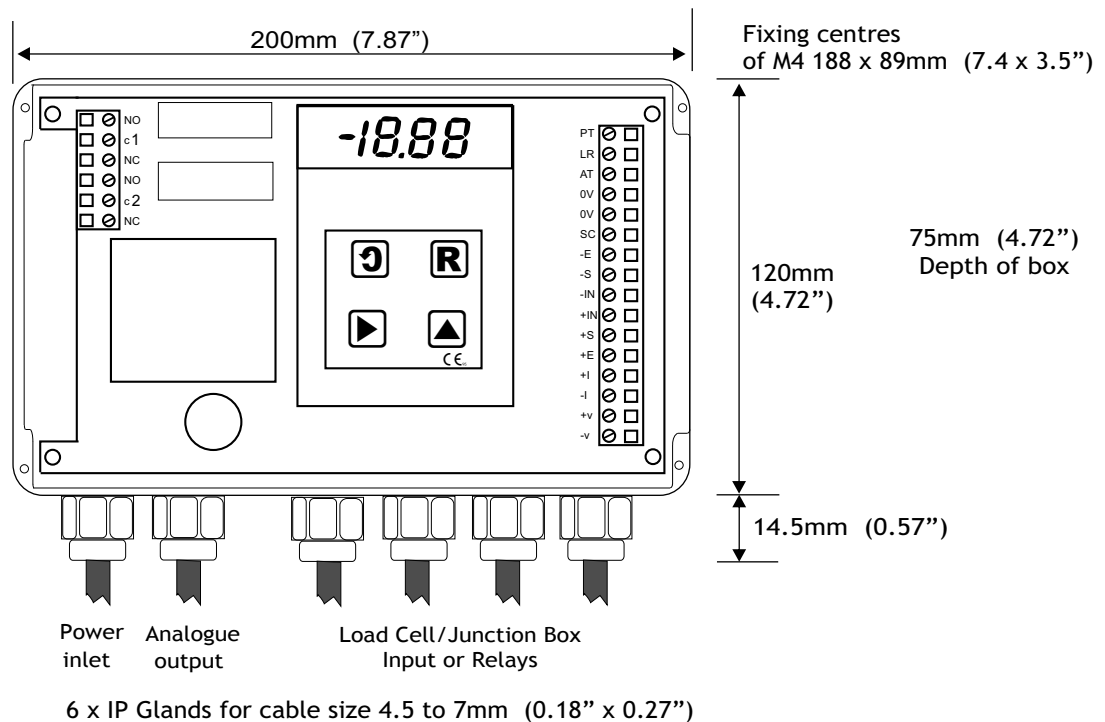

XT960 Load Cell Amplifier

Load Cell Connection	
Scale input signal range	0.5 to 7.8 mV/V (in 2 ranges configured from keypad)
Resolution	20 bits; 1,000,000 internal divisions
Measuring rate	Internal: 10 or 80 readings per second
Load cell excitation voltage	5.0 VDC

Inputs & Outputs	
Digital inputs (standard)	Volt free: available for auto-tare, print, peak hold, reset and other commands
Analogue output (standard)	Output with electrical isolation up to ± 130 V RMS
	Output voltage: 0-10 V (<2 mA)
	Output current: 4-20 mA (<1 k Ω)
Serial communications (option)	RS232 and RS485
	Protocol: MODBUS RTU
Relay output set points (option)	Transmission rates: 2500 to 115200 bauds (selectable)
	Qty. 2 off 5 A 240 VAC SPCO relays, with a latching option

Additional Data	
Power supply	AC version (XT960): 110 - 120 VAC or 220 - 230 VAC, 50 - 60 Hz
	DC version (XT960/32): 9-32 VDC, isolated
Power consumption	10W maximum
Operating temperature range	-10 to 50 °C
Storage temperature range	-20 to 70 °C
Relative Humidity	95% maximum (non-condensing)
Mounting	ABS surface mount case, IP65
Operator interface	Keyboard: 4 keys
	Display: 4.5 digit LCD
Options	Transparent lid (XT95-LTL)
	2 relay output set points
	Communications module (RS232, RS485)
	Stainless Steel Enclosure
	Die Cast Enclosure

DISTRIBUTED BY:



THAMES SIDE SENSORS LTD

Unit 10, io Trade Centre, Deacon Way, Reading, Berkshire RG30 6AZ

tel: +44 (0) 118 941 1387

fax: +44 (0) 118 941 2004

sales@thames-side.co.uk

www.thames-side.com

Issue: XT960.10.15



Our policy is one of continuous product enhancement. We therefore reserve the right to incorporate technical modifications without prior notification.



www.thames-side.com