


Low Profile Shear Beam Load Cell

FEATURES

- Capacities 500–1000 kg.
- Electroless Ni coated Steel construction
- OIML R60 and NTEP approved
- IP67 protection
- **Optional**
 - EEx ia IIC T6 hazardous area approval
 - FM and IECEx approvals available

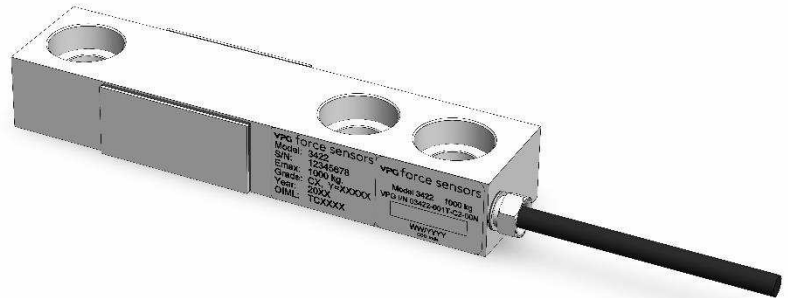

APPLICATIONS

- Low profile platforms
- Pallet truck weighing
- Tank and silo weighing




DESCRIPTION

The Model 3422 is a low profile shear beam load cell designed for high accuracy platform scales, pallet scales and process weighing applications.

It has high immunity to shock or side loading and is available in 2 mV/V sensitivity. For Hazardous environments this load cell is available with EEx ia IIC T6 level of European approval.

Nickel plating and full environmental sealing assures long-term reliability.

OUTLINE DIMENSIONS in millimeters

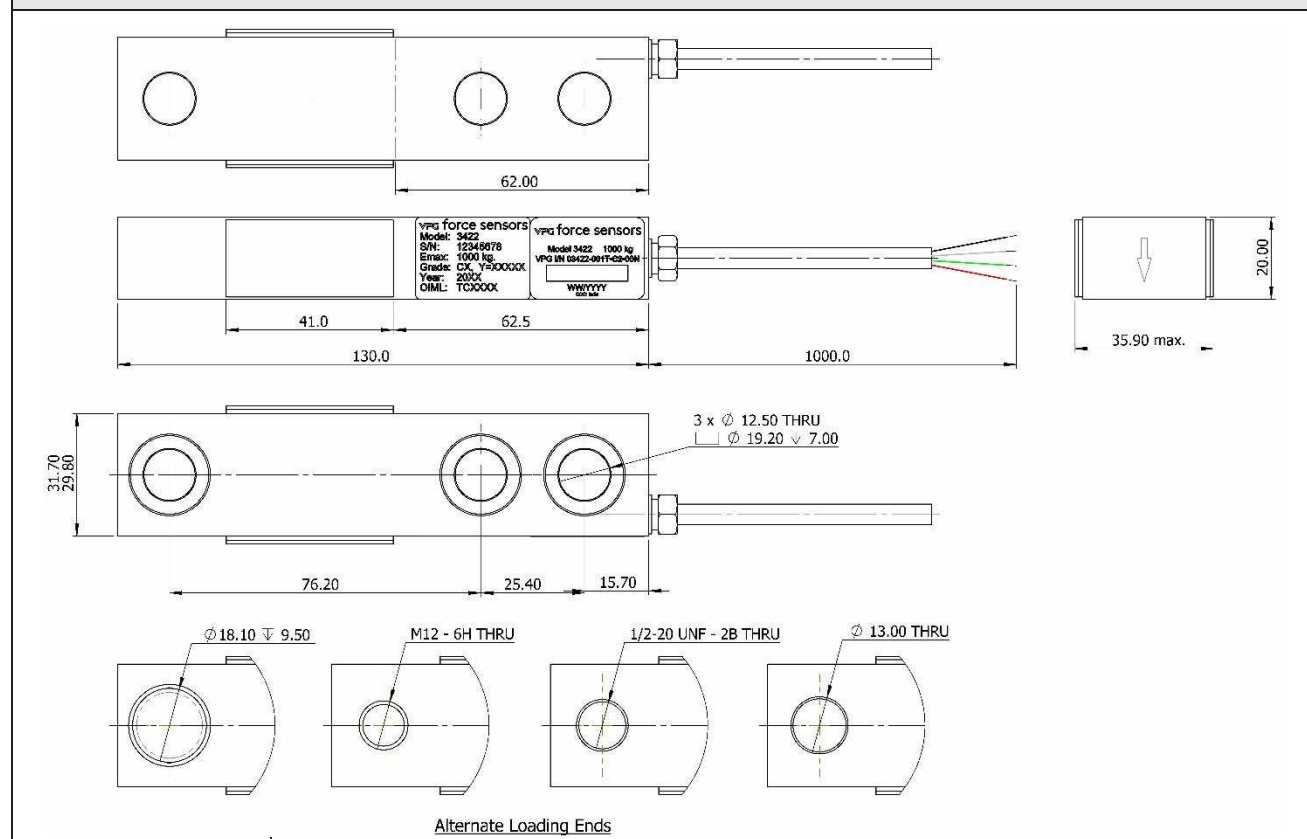


Low Profile Shear Beam Load Cell

SPECIFICATIONS			
PARAMETER	VALUE		UNIT
Rated capacity - RC. (E_{max})	500, 1000		kg
VPG Class designation	E3	G3	
Ref. accuracy	Not Approved	C3MR10	
$Y = E_{max}/V_{min}$	----	10000	
Rated output - R.O.	2.0		mV/V
Rated output tolerance	0.005		±mV/V
Zero balance	0.10		± mV/V
Zero return, 30 min.	0.03	0.017	±% of applied load
Load Cell error	0.05	0.02	±% of rated output
Temperature effect on zero	0.010	0.0014	±% of rated output/°C
Temperature effect on output	0.003	0.0012	±% of applied load/°C
Temperature range	-10 to +40		°C
Temperature range, safe	-20 to +60		°C
Maximum safe central overload	150		% of R.C.
Ultimate central overload	200		% of R.C.
Excitation, recommended	10		VDC or VAC RMS
Excitation, maximum	15		VDC or VAC RMS
Input impedance	349...450 999...1250		Ω
Output impedance	349...380 997...1060		Ω
Insulation resistance	>2000		MΩ
Cable length	1.0		m
Cable type	4-wire, braided, polyurethane, floating screen		Standard
Construction	Electroless Ni coated steel		
Environmental protection	IP67		
Recommended mounting torque	136		N*m

All specifications subject to change without notice.

WIRING SCHEMATIC DIAGRAM

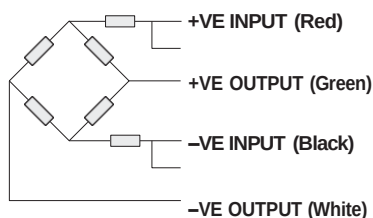

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase.

To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.