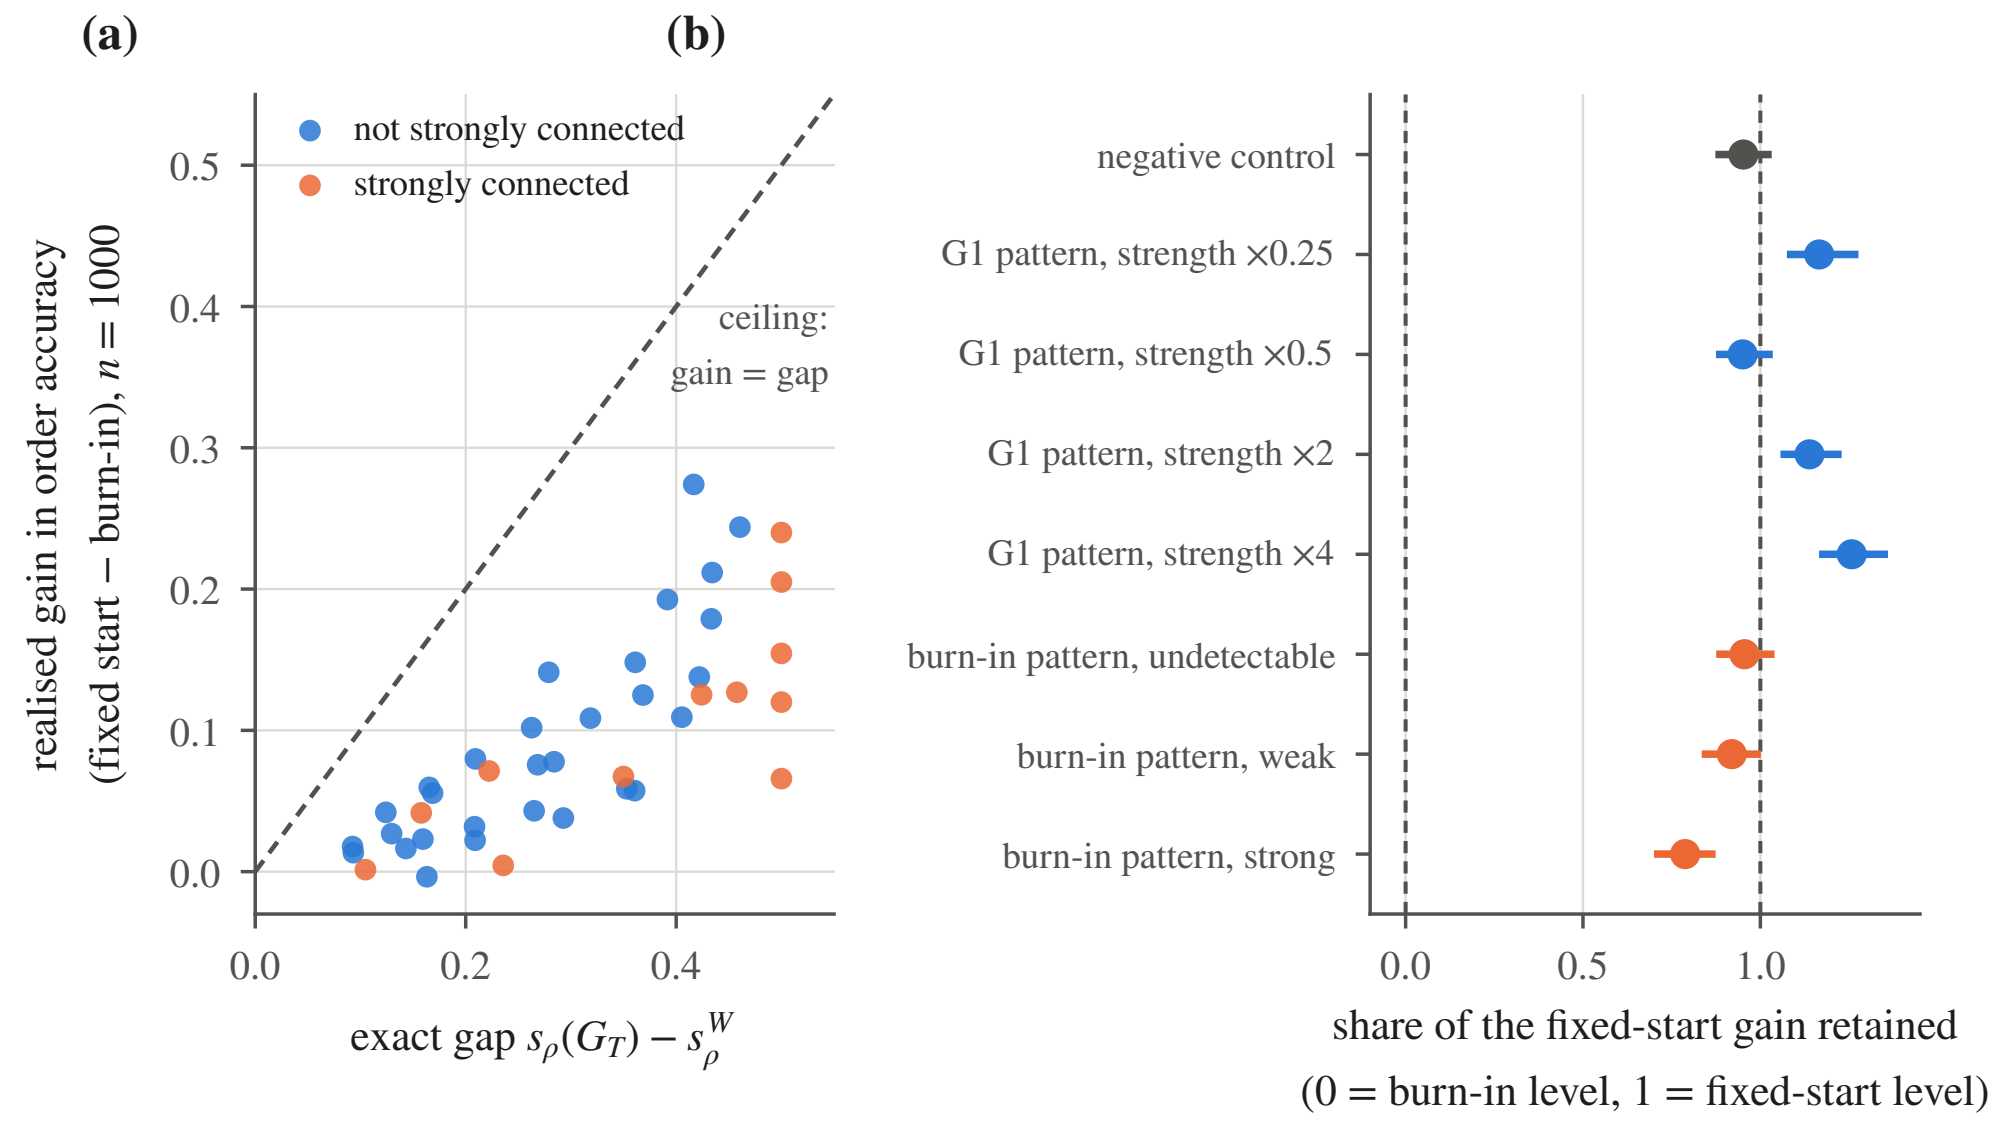
(a)
(b)
not strongly connected
strongly connected
ceiling:
gain = gap
realised gain in order accuracy
(fixed start − burn-in), $n = 1000$
0.0
0.1
0.2
0.3
0.4
0.5
0.0
0.2
0.4
exact gap $s_\rho(G_T) - s_\rho^W$
negative control
G1 pattern, strength ×0.25
G1 pattern, strength ×0.5
G1 pattern, strength ×2
G1 pattern, strength ×4
burn-in pattern, undetectable
burn-in pattern, weak
burn-in pattern, strong
0.0
0.5
1.0
share of the fixed-start gain retained
(0 = burn-in level, 1 = fixed-start level)