

48V Rectifier Test Report

Report Number..... : EM20241011BRRT
Date of issue : 2024-10-11
Name of Testing Laboratory
preparing the Report : EMTEK (Shenzhen) Co., Ltd
Applicant's name..... : SHENZHEN MEGMEET ELECTRICAL CO., LTD
Address : 5th Floor,Block B,Ziguang Information Harbor,
Langshan Road, Shenzhen
Trade Marks : **MEGMEET**
Test Standard : YD/T 731-2018 48V Rectifier
Test procedure..... : Efficiency Test
Test Model..... : MR483000SG3-EF

Testing location/ address:	Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China	
Tested by (name, function, signature)	Gary Zhang / Project Handler	



MR483000SG3-EF Efficiency Test

1#												
-15 ℃	Vin=85Vac /50Hz	42.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %
		Vin(V)	85.2 32	85.0 84	84.9 55	84.8 14	84.6 57	84.5 32	84.2 27	84.2 32	83.9 95	83.8 42
		Iin(A)	1.60 9	3.09 1	4.55 7	5.96 1	7.44 0	8.93 8	10.4 90	12.0 68	13.6 91	15.2 72
		PF	0.97 1	0.98 8	0.99 3	0.99 5	0.99 8	0.99 8	0.99 6	0.99 1	0.98 7	0.98 7
		Pin(W)	133. 190	259. 860	384. 570	503. 270	628. 680	754. 190	880. 340	1007 .50	1135 .10	1263 .30
		THDI (%)	20.0 28	13.8 11	10.5 99	8.59 1	4.46 2	3.77 7	3.30 0	2.96 8	2.53 1	2.26 6
		Vout(V)	42.0 78	42.0 71	42.0 79	42.0 74	42.0 71	42.0 57	42.0 65	42.0 46	42.0 37	42.0 34
		Iout(A)	2.79 5	5.59 9	8.39 6	11.1 95	14.0 00	16.7 97	19.5 95	22.4 00	25.1 99	27.9 95
		Pout(W)	117. 617	235. 555	353. 318	471. 008	588. 987	706. 452	824. 282	941. 834	1059 .30	1176 .75
		Eff(%)	88.3 1	90.6 5	91.8 7	93.5 9	93.6 9	93.6 7	93.6 3	93.4 8	93.3 2	93.1 5
	Vin=100Vac /50Hz	42.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %
		Vin(V)	100. 300	100. 150	100. 000	99.8 34	99.6 52	99.3 85	99.2 23	99.1 10	98.9 16	98.7 82
		Iin(A)	1.68 9	3.25 6	4.72 8	6.27 0	7.83 9	9.42 8	11.0 27	12.6 70	14.3 79	16.0 56
		PF	0.97 1	0.98 8	0.99 4	0.99 8	0.99 9	0.99 9	0.99 8	0.99 6	0.99 2	0.99 1
		Pin(W)	164. 610	322. 280	469. 720	625. 130	780. 400	935. 940	1092 .10	1250 .60	1411 .30	1571 .10
		THDI (%)	18.8 67	13.0 01	9.96 0	4.34 9	3.66 1	3.23 0	2.84 5	2.44 6	2.08 0	1.81 5
		Vout(V)	42.0 92	42.0 81	42.0 66	42.0 61	42.0 58	42.0 55	42.0 37	42.0 38	42.0 38	42.0 06
		Iout(A)	3.49 4	6.99 8	10.4 96	14.0 00	17.4 98	20.9 94	24.4 99	27.9 96	31.5 00	34.9 98
		Pout(W)	147. 075	294. 467	441. 516	588. 868	735. 948	882. 915	1029 .86	1176 .89	1324 .22	1470 .14

		Eff(%)	89.35	91.37	94.00	94.20	94.30	94.34	94.30	94.11	93.83	93.57
	Vin=110Vac/50Hz	42.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	110.330	110.170	110.010	109.840	109.520	109.330	109.170	109.020	108.900	108.730
		Iin(A)	1.745	3.347	4.896	6.486	8.113	9.752	11.408	13.108	14.840	16.611
		PF	0.971	0.989	0.994	0.999	0.999	0.999	0.999	0.997	0.995	0.993
		Pin(W)	187.000	364.460	535.160	711.470	887.800	1065.10	1244.00	1425.30	1607.90	1793.00
		THDI(%)	18.007	12.571	9.571	3.938	3.239	2.925	2.493	2.147	1.833	1.606
		Vout(V)	42.087	42.079	42.073	42.059	42.052	42.041	42.028	42.029	42.018	42.000
		Iout(A)	4.000	7.995	11.998	15.995	19.997	24.000	27.996	32.000	35.995	39.999
		Pout(W)	168.345	336.419	504.803	672.729	840.918	1008.97	1176.59	1344.91	1512.46	1679.96
		Eff(%)	90.02	92.31	94.33	94.56	94.72	94.73	94.58	94.36	94.06	93.70
	Vin=180Vac/50Hz	42.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	180.720	180.440	180.280	180.140	179.950	179.810	179.670	179.510	179.360	179.200
		Iin(A)	1.651	3.116	4.582	6.083	7.609	9.148	10.707	12.283	13.871	15.471
		PF	0.963	0.984	0.998	0.999	0.999	0.999	0.999	0.999	0.999	0.999
		Pin(W)	287.500	553.200	823.970	1094.50	1368.00	1643.70	1922.80	2203.50	2485.70	2769.00
		THDI(%)	8.220	10.770	3.986	3.342	2.659	2.255	2.049	1.811	1.614	1.438
		Vout(V)	42.103	42.057	42.061	42.037	42.034	42.013	41.992	41.982	42.000	41.964
		Iout(A)	6.247	12.498	18.748	24.999	31.248	37.498	43.750	50.001	56.252	62.504
		Pout(W)	263.009	525.621	788.580	1050.88	1313.48	1575.42	1837.15	2099.16	2362.60	2622.90
		Eff(%)	91.4	95.0	95.7	96.0	96.0	95.8	95.5	95.2	95.0	94.7

		%)	8	2	1	1	1	5	5	7	5	2
Vin=220Vac/50Hz	42.0Vout											
	load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	
	Vin(V)	220.930	220.810	220.690	220.560	220.430	220.310	220.180	220.040	219.820	219.660	
	Iin(A)	1.432	2.564	3.745	4.964	6.199	7.445	8.713	9.991	11.293	12.598	
	PF	0.918	0.976	0.995	0.997	0.998	0.999	0.999	0.998	0.997	0.996	
	Pin(W)	290.450	552.580	822.140	1092.00	1364.10	1637.80	1915.80	2194.40	2474.20	2755.50	
	THDI(%)	16.573	7.957	3.788	3.308	2.638	2.263	2.091	1.837	1.651	1.502	
	Vout(V)	42.072	42.047	42.049	42.040	42.033	41.999	41.996	41.980	41.976	41.962	
	Iout(A)	6.247	12.497	18.750	24.999	31.248	37.500	43.750	50.001	56.254	62.505	
	Pout(W)	262.837	525.451	788.423	1050.96	1313.47	1574.96	1837.35	2099.05	2361.31	2622.88	
	Eff(%)	90.49	95.09	95.90	96.24	96.29	96.16	95.91	95.66	95.44	95.19	
Vin=230Vac/50Hz	42.0Vout											
	load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	
	Vin(V)	230.950	230.830	230.710	230.490	230.330	230.220	230.100	229.990	229.890	229.770	
	Iin(A)	1.389	2.460	3.586	4.751	5.933	7.126	8.337	9.564	10.803	12.045	
	PF	0.905	0.973	0.993	0.997	0.998	0.998	0.998	0.997	0.995	0.995	
	Pin(W)	290.130	552.460	821.770	1091.30	1363.30	1636.90	1914.70	2192.70	2472.20	2753.00	
	THDI(%)	18.820	6.739	3.683	3.181	2.702	2.311	2.116	1.882	1.728	1.527	
	Vout(V)	42.080	42.060	42.058	42.042	42.033	42.002	41.997	41.992	41.989	41.963	
	Iout(A)	6.248	12.499	18.749	24.998	31.248	37.499	43.751	50.002	56.254	62.504	
	Pout(W)	262.898	525.686	788.549	1050.98	1313.48	1575.07	1837.40	2099.66	2362.05	2622.87	
	Eff(%)	90.61	95.15	95.96	96.31	96.35	96.22	95.96	95.76	95.54	95.27	

Vin=275Vac/50Hz	42.0Vout										
	load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %
	Vin(V)	276.180	276.060	275.980	275.770	275.650	275.540	275.480	275.360	275.310	275.200
	Iin(A)	1.332	2.185	3.123	4.116	5.120	6.153	7.210	8.258	9.322	10.401
	PF	0.791	0.923	0.959	0.966	0.969	0.967	0.964	0.964	0.962	0.961
	Pin(W)	291.090	556.910	826.840	1096.90	1367.00	1639.80	1915.00	2191.40	2470.00	2750.80
	THDI (%)	26.261	17.616	13.609	15.314	17.277	18.341	20.856	20.955	21.338	22.013
	Vout(V)	42.081	42.058	42.056	42.044	42.037	42.014	42.002	41.980	41.985	41.967
	Iout(A)	6.247	12.498	18.749	24.999	31.248	37.500	43.751	50.002	56.253	62.504
	Pout(W)	262.882	525.629	788.513	1051.05	1313.58	1575.50	1837.61	2099.07	2361.76	2623.07
	Eff(%)	90.31	94.38	95.37	95.82	96.09	96.08	95.96	95.79	95.62	95.36
	Vin=85Vac/50Hz	53.5Vout									
load		10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %
Vin(V)		85.232	85.084	84.935	84.800	84.666	84.503	84.346	84.209	84.028	83.911
Iin(A)		1.714	3.267	4.831	6.245	7.742	9.261	10.850	12.517	14.198	15.825
PF		0.970	0.988	0.993	0.995	0.997	0.999	0.999	0.989	0.986	0.985
Pin(W)		141.710	274.530	407.500	527.150	653.200	780.970	911.220	1042.90	1175.90	1308.60
THDI (%)		20.991	14.270	10.834	8.686	7.530	3.902	3.472	2.909	2.615	2.326
Vout(V)		53.631	53.615	53.612	53.568	53.605	53.586	53.585	53.559	53.562	53.548
Iout(A)		2.297	4.594	6.894	9.194	11.500	13.799	16.098	18.399	20.697	22.994
Pout(W)		123.205	246.326	369.584	492.506	616.445	739.456	862.594	985.420	1108.56	1231.32
Eff(%)		86.94	89.73	90.70	93.43	94.37	94.68	94.66	94.49	94.27	94.09
Vin=100Vac		53.5Vout									

	c/50Hz	load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %
		Vin(V)	100.310	100.160	99.952	99.879	99.660	99.526	99.360	99.200	99.066	98.966
		Iin(A)	1.702	3.244	4.754	6.110	7.627	9.150	10.698	12.291	13.941	15.585
		PF	0.969	0.987	0.993	0.995	0.999	0.999	0.999	0.997	0.993	0.990
		Pin(W)	165.420	320.790	471.770	607.460	759.090	909.640	1061.40	1215.20	1370.90	1526.40
		THDI (%)	20.244	13.895	10.654	8.566	3.979	3.390	2.989	2.651	2.305	2.000
		Vout(V)	53.628	53.628	53.616	53.569	53.591	53.576	53.555	53.558	53.547	53.534
		Iout(A)	2.698	5.398	8.098	10.800	13.494	16.194	18.897	21.597	24.297	26.999
		Pout(W)	144.681	289.465	434.195	578.532	723.153	867.616	1012.02	1156.69	1301.07	1445.35
		Eff(%)	87.46	90.24	92.04	95.24	95.27	95.38	95.35	95.19	94.91	94.69
	Vin=110Va c/50Hz	53.5Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %
		Vin(V)	110.330	110.160	109.930	109.850	109.640	109.480	109.310	109.170	108.990	108.870
		Iin(A)	1.765	3.363	4.794	6.375	7.921	9.515	11.130	12.776	14.473	16.183
		PF	0.969	0.988	0.993	0.995	0.999	0.999	0.999	0.998	0.995	0.992
		Pin(W)	188.730	365.860	523.390	697.110	867.610	1040.80	1215.40	1391.80	1569.70	1748.50
		THDI (%)	19.388	13.418	10.172	8.348	3.577	2.982	2.714	2.387	2.039	1.788
		Vout(V)	53.624	53.623	53.567	53.594	53.574	53.563	53.546	53.556	53.534	53.538
		Iout(A)	3.100	6.195	9.296	12.400	15.495	18.599	21.694	24.796	27.899	30.995
		Pout(W)	166.217	332.172	497.985	664.563	830.135	996.243	1161.64	1327.97	1493.54	1659.40
		Eff(%)	88.07	90.79	95.15	95.33	95.68	95.72	95.58	95.41	95.15	94.90
	Vin=180Va c/50Hz	53.5Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100

												%
		Vin(V)	180.590	180.520	180.310	180.150	179.980	179.800	179.610	179.420	179.220	179.050
		Iin(A)	1.892	3.506	5.172	6.883	8.610	10.354	12.119	13.900	15.698	17.501
		PF	0.970	0.986	0.998	0.999	0.999	0.999	0.999	0.999	0.999	0.999
		Pin(W)	331.370	624.100	930.740	1238.60	1548.50	1860.70	2175.70	2492.90	2811.40	3130.60
		THDI(%)	9.667	10.749	3.869	3.159	2.653	2.304	1.909	1.717	1.546	1.377
		Vout(V)	53.619	53.557	53.567	53.548	53.540	53.532	53.527	53.526	53.513	53.508
		Iout(A)	5.599	11.195	16.798	22.401	27.996	33.599	39.195	44.799	50.403	56.000
		Pout(W)	300.198	599.592	899.814	1199.53	1498.93	1798.64	2097.98	2397.90	2697.21	2996.47
		Eff(%)	90.59	96.07	96.68	96.85	96.80	96.67	96.43	96.19	95.94	95.72
	Vin=220Vac/50Hz	53.5Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	220.910	220.740	220.580	220.460	220.280	220.140	220.000	219.820	219.610	219.470
		Iin(A)	1.619	2.887	4.231	5.619	7.020	8.433	9.860	11.304	12.765	14.236
		PF	0.939	0.979	0.996	0.998	0.999	0.999	0.999	0.999	0.998	0.996
		Pin(W)	335.720	623.770	929.060	1235.80	1544.10	1854.30	2166.80	2481.70	2796.80	3113.50
		THDI(%)	12.752	9.425	3.925	3.324	2.649	2.252	1.959	1.766	1.637	1.490
		Vout(V)	53.614	53.562	53.554	53.552	53.542	53.520	53.515	53.514	53.499	53.501
		Iout(A)	5.600	11.195	16.799	22.401	27.997	33.601	39.196	44.800	50.403	56.001
		Pout(W)	300.217	599.645	899.625	1199.62	1499.00	1798.32	2097.55	2397.42	2696.51	2996.07
		Eff(%)	89.43	96.13	96.83	97.07	97.08	96.98	96.80	96.60	96.41	96.23
	Vin=230Vac/50Hz	53.5Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%

		Vin(V)	230.910	230.720	230.580	230.330	230.200	230.060	229.950	229.790	229.650	229.540
		Iin(A)	1.572	2.767	4.052	5.379	6.719	8.068	9.433	10.813	12.212	13.612
		PF	0.925	0.977	0.994	0.997	0.998	0.999	0.999	0.998	0.997	0.996
		Pin(W)	335.870	623.760	929.090	1235.50	1543.70	1853.40	2165.90	2480.00	2795.10	3110.90
		THDI(%)	16.068	8.305	3.816	3.223	2.643	2.278	2.065	1.853	1.700	1.523
		Vout(V)	53.634	53.567	53.572	53.553	53.549	53.520	53.521	53.519	53.518	53.504
		Iout(A)	5.599	11.195	16.799	22.402	27.997	33.601	39.195	44.800	50.403	56.001
		Pout(W)	300.317	599.675	899.929	1199.66	1499.19	1798.31	2097.77	2397.63	2697.49	2996.24
		Eff(%)	89.42	96.14	96.86	97.10	97.12	97.03	96.85	96.68	96.51	96.31
	Vin=275Vac/50Hz	53.5Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	276.170	276.030	275.900	275.810	275.670	275.550	275.360	275.350	275.260	275.130
		Iin(A)	1.458	2.426	3.505	4.627	5.779	6.968	8.142	9.331	10.537	11.778
		PF	0.821	0.938	0.963	0.969	0.969	0.965	0.965	0.963	0.961	0.958
		Pin(W)	330.730	628.140	931.200	1236.10	1543.30	1852.70	2162.80	2475.10	2788.50	3103.50
		THDI(%)	25.328	16.360	14.155	15.972	17.584	18.761	20.967	21.587	22.461	22.968
		Vout(V)	53.631	53.611	53.592	53.565	53.543	53.536	53.524	53.525	53.506	53.498
		Iout(A)	5.600	11.196	16.799	22.402	27.997	33.601	39.196	44.800	50.403	56.001
		Pout(W)	300.346	600.242	900.294	1199.95	1499.03	1798.83	2097.91	2397.95	2696.90	2995.98
		Eff(%)	90.81	95.56	96.68	97.08	97.13	97.09	97.00	96.88	96.72	96.54
	Vin=85Vac/50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	85.2	85.0	84.7	84.5	84.4	84.3	84.1	84.0	83.9	83.7

		V)	17	59	32	98	44	01	22	18	09	99
		lin(A)	1.72 5	3.20 3	4.72 2	6.20 8	7.64 9	9.18 4	10.7 57	12.4 15	14.0 76	15.6 87
		PF	0.96 9	0.98 7	0.99 3	0.99 5	0.99 6	0.99 7	0.99 6	0.99 0	0.98 5	0.98 5
		Pin(W)	142. 520	268. 840	397. 120	522. 580	643. 560	771. 710	901. 290	1032 .50	1163 .50	1294 .30
		THDI (%)	21.3 19	14.7 11	11.2 12	9.09 6	7.71 3	6.66 1	3.58 2	3.07 5	2.63 7	2.38 5
		Vout(V)	58.1 10	58.0 98	58.0 84	58.0 83	58.0 78	58.0 78	58.0 72	58.0 77	58.0 60	58.0 57
		Iout(A)	2.09 7	4.19 4	6.30 0	8.39 7	10.4 96	12.5 94	14.7 00	16.7 99	18.8 97	20.9 94
		Pout(W)	121. 878	243. 677	365. 930	487. 733	609. 600	731. 448	853. 674	975. 632	1097 .16	1218 .84
		Eff(%)	85.5 2	90.6 4	92.1 5	93.3 3	94.7 2	94.7 8	94.7 2	94.4 9	94.3 0	94.1 7
	Vin=100V ac/50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %
		Vin(V)	100. 310	100. 170	100. 020	99.6 85	99.5 64	99.3 70	99.1 85	99.0 17	98.9 56	98.8 03
		lin(A)	1.72 8	3.20 8	4.72 2	6.22 8	7.67 1	9.20 2	10.7 63	12.3 64	14.0 15	15.6 81
		PF	0.96 8	0.98 6	0.99 3	0.99 5	0.99 7	0.99 9	0.99 8	0.99 7	0.99 2	0.98 9
		Pin(W)	167. 780	316. 950	468. 790	617. 880	761. 060	913. 340	1065 .90	1220 .20	1376 .10	1532 .20
		THDI (%)	20.7 65	14.4 12	10.9 66	8.81 5	7.45 8	3.47 4	3.04 4	2.68 3	2.35 2	2.03 9
		Vout(V)	58.1 56	58.0 76	58.0 74	58.0 86	58.0 72	58.0 79	58.0 73	58.0 70	58.0 69	58.0 56
		Iout(A)	2.49 8	4.99 7	7.49 7	9.99 8	12.4 97	14.9 98	17.4 99	19.9 97	22.4 97	24.9 98
		Pout(W)	145. 263	290. 204	435. 361	580. 741	725. 710	871. 037	1016 .20	1161 .22	1306 .40	1451 .28
		Eff(%)	86.5 8	91.5 6	92.8 7	93.9 9	95.3 6	95.3 7	95.3 4	95.1 7	94.9 4	94.7 2
	Vin=110V ac/50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %
		Vin(V)	110. 330	110. 170	110. 010	109. 820	109. 470	109. 320	109. 160	108. 990	108. 860	108. 750

		Iin(A)	1.81 3	3.35 8	4.92 3	6.45 0	8.04 5	9.66 8	11.3 07	12.9 79	14.7 00	16.4 44
		PF	0.96 9	0.98 7	0.99 3	0.99 5	0.99 9	0.99 9	0.99 9	0.99 8	0.99 5	0.99 2
		Pin(W)	193. 790	365. 120	537. 760	705. 150	879. 810	1056 .00	1232 .90	1411 .30	1591 .60	1773 .20
		THDI (%)	19.8 71	13.7 97	10.4 35	8.44 4	3.60 4	3.04 3	2.76 5	2.38 9	2.05 6	1.76 8
		Vout(V)	58.1 70	58.0 82	58.0 85	58.0 78	58.0 69	58.0 65	58.0 69	58.0 54	58.0 44	58.0 45
		Iout(A)	2.89 9	5.80 0	8.69 4	11.5 97	14.4 99	17.4 02	20.2 96	23.1 96	26.0 99	29.0 00
		Pout(W)	168. 644	336. 872	505. 017	673. 520	841. 929	1010 .45	1178 .53	1346 .66	1514 .92	1683 .31
		Eff(%)	87.0 2	92.2 6	93.9 1	95.5 1	95.6 9	95.6 9	95.5 9	95.4 2	95.1 8	94.9 3
	Vin=180Vac/50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %
		Vin(V)	180. 690	180. 520	180. 320	180. 020	179. 810	179. 630	179. 470	179. 310	179. 150	179. 020
		Iin(A)	1.86 4	3.51 9	5.17 8	6.89 0	8.61 9	10.3 62	12.1 16	13.8 86	15.6 70	17.4 63
		PF	0.96 9	0.98 5	0.99 8	0.99 9	0.99 9	0.99 9	1.00 0	0.99 9	0.99 9	0.99 9
		Pin(W)	326. 470	625. 970	931. 760	1238 .80	1548 .60	1860 .40	2173 .40	2488 .60	2805 .20	3123 .80
		THDI (%)	9.83 7	11.5 34	4.02 2	3.32 5	2.70 3	2.27 3	1.96 7	1.73 4	1.54 8	1.37 2
		Vout(V)	58.0 83	58.0 84	58.0 69	58.0 58	58.0 54	58.0 50	58.0 35	58.0 26	58.0 16	58.0 08
		Iout(A)	5.16 8	10.3 40	15.5 11	20.6 75	25.8 46	31.0 18	36.1 89	41.3 63	46.5 33	51.6 98
		Pout(W)	300. 159	600. 563	900. 720	1200 .34	1500 .48	1800 .57	2100 .24	2400 .13	2699 .67	2998 .91
		Eff(%)	91.9 4	95.9 4	96.6 7	96.9 0	96.8 9	96.7 8	96.6 3	96.4 5	96.2 4	96.0 0
	Vin=220Vac/50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %
		Vin(V)	220. 910	220. 770	220. 620	220. 480	220. 330	220. 160	219. 910	219. 750	219. 630	219. 530
		Iin(A)	1.60	2.89	4.23	5.62	7.02	8.43	9.85	11.2	12.7	14.2

			4	6	6	0	0	0	5	91	42	01
		PF	0.935	0.978	0.995	0.998	0.998	0.999	0.999	0.999	0.998	0.997
		Pin(W)	331.410	625.640	930.310	1236.30	1544.30	1854.00	2164.90	2477.90	2791.90	3107.00
		THDI(%)	14.839	10.196	4.064	3.424	2.783	2.383	2.037	1.810	1.582	1.455
		Vout(V)	58.085	58.081	58.075	58.066	58.057	58.040	58.030	58.036	58.021	58.012
		Iout(A)	5.168	10.341	15.512	20.675	25.847	31.019	36.189	41.364	46.533	51.698
		Pout(W)	300.206	600.619	900.849	1200.52	1500.62	1800.33	2100.06	2400.56	2699.90	2999.09
		Eff(%)	90.59	96.00	96.83	97.11	97.17	97.11	97.01	96.88	96.71	96.53
	Vin=230Vac/50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	230.930	230.790	230.640	230.350	230.230	230.080	229.950	229.810	229.720	229.520
		Iin(A)	1.558	2.776	4.055	5.380	6.716	8.065	9.421	10.794	12.183	13.581
		PF	0.921	0.977	0.994	0.997	0.998	0.999	0.999	0.998	0.997	0.996
		Pin(W)	331.270	625.660	930.130	1235.80	1543.40	1853.00	2163.40	2476.00	2789.60	3103.90
		THDI(%)	18.423	8.917	4.035	3.337	2.781	2.451	2.043	1.809	1.680	1.474
		Vout(V)	58.084	58.078	58.064	58.058	58.038	58.047	58.027	58.030	58.022	58.004
		Iout(A)	5.168	10.340	15.511	20.675	25.847	31.018	36.190	41.363	46.533	51.698
		Pout(W)	300.171	600.501	900.649	1200.36	1500.14	1800.50	2099.98	2400.30	2699.95	2998.68
		Eff(%)	90.61	95.98	96.83	97.13	97.20	97.17	97.07	96.94	96.79	96.61
	Vin=275Vac/50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	276.160	275.940	275.850	275.680	275.550	275.550	275.390	275.350	275.190	275.120
		Iin(A)	1.456	2.420	3.500	4.625	5.775	6.958	8.133	9.319	10.519	11.754

[illegible]

		Pin(W)	284.160	550.690	820.840	1091.60	1364.50	1640.10	1919.70	2200.30	2483.10	2768.00
		THDI(%)	8.737	11.851	4.811	4.042	3.219	2.750	2.449	2.205	1.909	1.781
		Vout(V)	42.054	42.042	42.034	42.017	41.997	41.986	41.979	41.959	41.948	41.943
		Iout(A)	6.246	12.496	18.748	24.997	31.247	37.498	43.750	50.001	56.252	62.504
		Pout(W)	262.661	525.366	788.031	1050.32	1312.28	1574.40	1836.56	2097.96	2359.69	2621.59
		Eff(%)	92.43	95.40	96.00	96.22	96.17	95.99	95.67	95.35	95.03	94.71
	Vin=220Vac/50Hz	42.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	220.960	220.840	220.720	220.600	220.430	220.310	220.190	220.070	219.960	219.830
		Iin(A)	1.420	2.556	3.735	4.953	6.187	7.435	8.701	9.979	11.280	12.585
		PF	0.921	0.975	0.994	0.997	0.998	0.998	0.999	0.998	0.997	0.996
		Pin(W)	289.180	550.560	819.670	1089.40	1361.30	1635.30	1913.20	2192.10	2472.30	2754.90
		THDI(%)	15.139	9.140	4.705	4.109	3.408	2.974	2.643	2.372	2.153	1.945
		Vout(V)	42.057	42.031	42.023	42.018	41.995	41.970	41.970	41.958	41.938	41.935
		Iout(A)	6.246	12.497	18.748	24.998	31.247	37.499	43.751	50.001	56.253	62.504
		Pout(W)	262.712	525.262	787.854	1050.37	1312.24	1573.84	1836.23	2097.93	2359.15	2621.11
		Eff(%)	90.85	95.41	96.12	96.42	96.40	96.24	95.98	95.70	95.42	95.14
	Vin=230Vac/50Hz	42.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	230.990	230.880	230.760	230.650	230.530	230.390	230.260	230.150	230.030	229.910
		Iin(A)	1.379	2.452	3.576	4.738	5.918	7.112	8.322	9.551	10.789	12.036
		PF	0.907	0.973	0.993	0.996	0.998	0.998	0.998	0.997	0.995	0.995
		Pin(W)	289.289	550.550	819.819	1089.1089	1360.1360	1634.1634	1912.1912	2191.2191	2470.2470	2752.2752

		W)	050	790	720	.00	.90	.70	.40	.40	.70	.80
		THDI (%)	17.002	7.881	4.575	4.061	3.382	2.941	2.646	2.446	2.184	1.961
		Vout(V)	42.055	42.026	42.025	42.011	41.995	41.971	41.969	41.962	41.948	41.926
		Iout(A)	6.246	12.496	18.748	24.998	31.248	37.499	43.750	50.002	56.253	62.504
		Pout(W)	262.690	525.170	787.875	1050.18	1312.23	1573.85	1836.16	2098.18	2359.70	2620.53
		Eff(%)	90.88	95.35	96.12	96.44	96.42	96.28	96.01	95.75	95.51	95.20
	Vin=275Vac/50Hz	42.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	276.230	276.100	276.020	275.950	275.840	275.740	275.630	275.550	275.450	275.360
		Iin(A)	1.329	2.170	3.111	4.094	5.085	6.115	7.154	8.193	9.247	10.319
		PF	0.791	0.926	0.960	0.969	0.973	0.971	0.970	0.970	0.969	0.968
		Pin(W)	290.180	554.930	824.090	1094.50	1364.40	1637.70	1912.50	2189.90	2469.10	2750.00
		THDI (%)	28.515	17.580	14.038	14.172	14.875	15.782	16.593	17.304	19.116	18.519
		Vout(V)	42.051	42.036	42.021	42.015	42.007	41.990	41.966	41.952	41.935	41.932
		Iout(A)	6.246	12.497	18.748	24.998	31.248	37.499	43.750	50.001	56.252	62.506
		Pout(W)	262.657	525.317	787.785	1050.29	1312.61	1574.60	1836.03	2097.67	2358.95	2621.02
		Eff(%)	90.52	94.66	95.60	95.96	96.20	96.15	96.00	95.79	95.54	95.31
	Vin=85Vac/50Hz	53.5Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	85.245	85.099	84.951	84.821	84.680	84.526	84.412	84.274	84.102	83.955
		Iin(A)	1.701	3.251	4.824	6.235	7.744	9.260	10.845	12.524	14.204	15.853
		PF	0.968	0.987	0.992	0.995	0.996	0.998	0.995	0.989	0.986	0.985
		Pin(W)	140.430	272.950	406.670	526.270	653.320	780.990	911.320	1044.10	1177.50	1311.60

		THDI (%)	21.9 18	14.9 41	11.3 33	9.08 4	7.87 1	4.18 5	3.67 4	3.13 3	2.74 6	2.46 6
		Vout(V)	53.6 23	53.6 09	53.6 08	53.5 47	53.5 86	53.5 74	53.5 51	53.5 46	53.5 49	53.5 45
		Iout(A)	2.29 7	4.59 4	6.89 3	9.19 2	11.4 99	13.7 99	16.0 97	18.3 98	20.6 96	22.9 95
		Pout(W)	123. 161	246. 305	369. 533	492. 175	616. 175	739. 257	862. 012	985. 150	1108. .26	1231 .28
		Eff(%)	87.7 0	90.2 4	90.8 7	93.5 2	94.3 1	94.6 6	94.5 9	94.3 5	94.1 2	93.8 8
	Vin=100Vac/50Hz	53.5Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	100. 320	100. 180	100. 030	99.9 08	99.7 53	99.6 04	99.4 51	99.2 87	99.1 44	99.0 05
		Iin(A)	1.69 0	3.22 8	4.74 7	6.10 5	7.61 3	9.13 7	10.6 92	12.2 89	13.9 42	15.5 99
		PF	0.96 7	0.98 6	0.99 2	0.99 5	0.99 9	0.99 9	0.99 8	0.99 7	0.99 3	0.99 0
		Pin(W)	163. 910	318. 860	471. 260	606. 860	758. 340	908. 980	1061 .60	1215 .90	1372 .00	1528 .60
		THDI (%)	21.2 14	14.6 60	11.2 06	9.03 2	4.40 6	3.78 6	3.28 5	2.90 6	2.50 9	2.22 0
		Vout(V)	53.6 19	53.6 18	53.6 12	53.5 63	53.5 73	53.5 56	53.5 41	53.5 46	53.5 24	53.5 36
		Iout(A)	2.69 7	5.39 8	8.09 9	10.8 00	13.4 93	16.1 93	18.8 96	21.5 97	24.2 97	26.9 99
		Pout(W)	144. 628	289. 432	434. 185	578. 471	722. 863	867. 259	1011 .72	1156 .42	1300 .47	1445 .41
		Eff(%)	88.2 4	90.7 7	92.1 3	95.3 2	95.3 2	95.4 1	95.3 0	95.1 1	94.7 9	94.5 6
	Vin=110Vac/50Hz	53.5Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	110. 340	110. 190	110. 060	109. 910	109. 750	109. 580	109. 420	109. 260	109. 100	108. 950
		Iin(A)	1.75 4	3.34 8	4.78 5	6.36 7	7.90 5	9.50 1	11.1 19	12.7 69	14.4 71	16.1 82
		PF	0.96 7	0.98 6	0.99 3	0.99 5	0.99 9	0.99 9	0.99 9	0.99 8	0.99 5	0.99 2
		Pin(W)	187. 170	363. 990	522. 730	696. 410	866. 520	1040 .10	1215 .20	1392 .00	1570 .80	1749 .80
		THDI	20.4	14.2	10.7	8.85	3.97	3.38	3.02	2.66	2.29	2.00

		(%)	98	07	53	3	1	5	2	1	3	5
		Vout(V)	53.630	53.619	53.575	53.596	53.552	53.554	53.544	53.540	53.537	53.517
		Iout(A)	3.099	6.193	9.296	12.400	15.495	18.599	21.694	24.796	27.899	30.995
		Pout(W)	166.213	332.078	498.023	664.590	829.799	996.043	1161.58	1327.59	1493.61	1658.74
		Eff(%)	88.80	91.23	95.27	95.43	95.76	95.76	95.59	95.37	95.09	94.80
	Vin=180Vac/50Hz	53.5Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	180.730	180.580	180.410	180.240	180.070	179.890	179.710	179.520	179.310	179.170
		Iin(A)	1.881	3.503	5.163	6.873	8.599	10.346	12.110	13.894	15.695	17.504
		PF	0.969	0.985	0.998	0.999	0.999	0.999	0.999	0.999	0.999	0.999
		Pin(W)	329.230	623.070	929.340	1237.20	1547.10	1859.90	2175.00	2492.90	2812.20	3133.60
		THDI(%)	11.276	11.702	4.698	3.778	3.218	2.591	2.269	2.125	1.883	1.718
		Vout(V)	53.606	53.562	53.562	53.539	53.526	53.507	53.506	53.499	53.488	53.485
		Iout(A)	5.598	11.194	16.797	22.400	27.995	33.600	39.194	44.800	50.402	56.000
		Pout(W)	300.107	599.589	899.680	1199.28	1498.48	1797.81	2097.13	2396.75	2695.88	2995.18
		Eff(%)	91.15	96.23	96.81	96.94	96.86	96.66	96.42	96.14	95.86	95.58
	Vin=220Vac/50Hz	53.5Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	220.930	220.810	220.670	220.480	220.340	220.210	220.080	219.940	219.790	219.640
		Iin(A)	1.604	2.884	4.225	5.612	7.015	8.428	9.854	11.297	12.760	14.236
		PF	0.942	0.978	0.995	0.998	0.998	0.999	0.999	0.999	0.997	0.996
		Pin(W)	333.950	622.730	927.840	1234.30	1543.10	1853.50	2166.10	2481.10	2797.80	3115.70
		THDI(%)	10.802	10.750	4.891	4.207	3.416	2.910	2.591	2.365	2.198	1.958

[illegible]

		V)	03	03	75	47	34	10	08	07	83	79
		Iout(A)	5.599	11.195	16.798	22.401	27.996	33.600	39.195	44.800	50.403	56.001
		Pout(W)	300.117	600.113	899.972	1199.49	1498.75	1797.94	2097.26	2397.09	2695.67	2994.86
		Eff(%)	91.11	95.79	96.80	97.16	97.18	97.12	97.01	96.87	96.68	96.48
	Vin=85Vac /50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	85.243	85.101	84.961	84.797	84.640	84.513	84.364	84.258	84.126	83.949
		Iin(A)	1.724	3.192	4.696	6.183	7.630	9.162	10.735	12.387	14.052	15.683
		PF	0.967	0.986	0.992	0.995	0.996	0.997	0.996	0.990	0.985	0.985
		Pin(W)	142.150	267.750	395.710	521.490	643.280	771.660	901.920	1033.00	1164.70	1296.60
		THDI(%)	22.325	15.451	11.826	9.562	8.139	7.008	3.819	3.282	2.783	2.576
		Vout(V)	58.079	58.071	58.059	58.059	58.068	58.062	58.061	58.047	58.043	58.046
		Iout(A)	2.096	4.193	6.298	8.396	10.496	12.593	14.699	16.797	18.896	20.994
		Pout(W)	121.740	243.477	365.673	487.453	609.465	731.147	853.439	975.044	1096.81	1218.60
		Eff(%)	85.64	90.93	92.41	93.47	94.74	94.75	94.63	94.39	94.17	93.98
	Vin=100Vac /50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	100.320	100.180	100.040	99.911	99.759	99.570	99.411	99.273	99.123	98.981
		Iin(A)	1.717	3.198	4.706	6.136	7.653	9.179	10.738	12.334	13.995	15.665
		PF	0.966	0.985	0.992	0.995	0.996	0.999	0.998	0.997	0.992	0.989
		Pin(W)	166.380	315.670	466.990	609.800	760.520	912.770	1065.70	1220.20	1376.60	1533.50
		THDI(%)	21.813	15.154	11.632	9.455	7.955	3.847	3.367	3.052	2.630	2.278
		Vout(V)	58.141	58.060	58.072	58.078	58.067	58.057	58.050	58.061	58.042	58.040

		Iout(A)	2.497	4.996	7.496	9.997	12.497	14.996	17.498	19.997	22.498	24.998
		Pout(W)	145.191	290.065	435.288	580.598	725.640	870.634	1015.76	1161.04	1305.80	1450.89
		Eff(%)	87.27	91.89	93.21	95.21	95.41	95.38	95.31	95.15	94.86	94.61
	Vin=110Vac/50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	110.350	110.200	110.040	109.890	109.670	109.520	109.380	109.210	109.060	108.920
		Iin(A)	1.799	3.346	4.912	6.439	8.024	9.645	11.281	12.956	14.682	16.429
		PF	0.966	0.986	0.992	0.995	0.999	0.999	0.999	0.998	0.994	0.992
		Pin(W)	191.840	363.540	536.350	704.070	878.940	1055.30	1232.40	1411.60	1592.40	1774.60
		THDI(%)	21.008	14.606	11.054	8.999	3.974	3.439	3.101	2.728	2.327	2.041
		Vout(V)	58.151	58.065	58.064	58.056	58.054	58.057	58.052	58.039	58.035	58.041
		Iout(A)	2.899	5.799	8.694	11.596	14.497	17.401	20.295	23.196	26.099	29.000
		Pout(W)	168.561	336.742	504.783	673.190	841.612	1010.23	1178.17	1346.28	1514.68	1683.20
		Eff(%)	87.87	92.63	94.12	95.61	95.75	95.73	95.60	95.37	95.12	94.85
	Vin=180Vac/50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	180.730	180.570	180.400	180.230	180.020	179.870	179.700	179.520	179.340	179.160
		Iin(A)	1.857	3.515	5.170	6.875	8.604	10.343	12.098	13.871	15.663	17.463
		PF	0.968	0.984	0.998	0.999	0.999	0.999	0.999	0.999	0.999	0.999
		Pin(W)	324.750	624.760	930.460	1237.50	1547.40	1859.20	2172.80	2488.70	2806.90	3126.20
		THDI(%)	11.513	12.640	4.912	3.970	3.249	2.772	2.385	2.152	1.877	1.723
		Vout(V)	58.068	58.076	58.059	58.046	58.043	58.030	58.020	58.020	58.016	58.003
		Iout(A)	5.16	10.3	15.5	20.6	25.8	31.0	36.1	41.3	46.5	51.6

		A)	7	39	10	75	46	17	89	62	33	97
		Pout(W)	300.050	600.446	900.506	1200.07	1500.19	1799.92	2099.67	2399.80	2699.64	2998.63
		Eff(%)	92.39	96.11	96.78	96.98	96.95	96.81	96.63	96.43	96.18	95.92
	Vin=220Vac/50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	220.940	220.810	220.670	220.530	220.360	220.220	220.090	219.950	219.800	219.660
		Iin(A)	1.591	2.894	4.231	5.614	7.014	8.425	9.844	11.280	12.735	14.199
		PF	0.939	0.977	0.995	0.997	0.998	0.999	0.999	0.999	0.998	0.997
		Pin(W)	330.330	624.440	929.030	1235.00	1543.00	1853.10	2164.20	2477.70	2792.40	3108.40
		THDI(%)	12.702	11.698	5.039	4.328	3.501	3.007	2.572	2.287	2.088	1.942
		Vout(V)	58.064	58.060	58.043	58.044	58.025	58.028	58.030	58.017	58.006	58.003
		Iout(A)	5.168	10.340	15.511	20.675	25.846	31.017	36.189	41.363	46.533	51.699
		Pout(W)	300.095	600.345	900.303	1200.05	1499.73	1799.87	2100.05	2399.76	2699.16	2998.65
		Eff(%)	90.85	96.14	96.91	97.17	97.20	97.13	97.04	96.85	96.66	96.47
	Vin=230Vac/50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	230.960	230.840	230.650	230.530	230.410	230.280	230.160	230.010	229.890	229.750
		Iin(A)	1.548	2.772	4.051	5.372	6.707	8.054	9.410	10.784	12.179	13.574
		PF	0.925	0.976	0.994	0.997	0.998	0.999	0.999	0.999	0.998	0.996
		Pin(W)	330.640	624.510	928.860	1234.60	1542.10	1851.90	2162.80	2475.80	2790.20	3105.20
		THDI(%)	16.371	10.242	4.978	4.232	3.536	3.009	2.716	2.379	2.109	1.878
		Vout(V)	58.065	58.057	58.050	58.039	58.019	58.018	58.001	58.011	58.006	57.996
		Iout(A)	5.168	10.340	15.512	20.675	25.848	31.018	36.189	41.363	46.533	51.698

		Pout(W)	300.069	600.283	900.455	1199.97	1499.65	1799.60	2098.98	2399.49	2699.19	2998.23
		Eff(%)	90.75	96.12	96.94	97.20	97.25	97.18	97.05	96.92	96.74	96.56
	Vin=275Vac/50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	276.220	276.120	276.010	275.900	275.790	275.640	275.620	275.470	275.360	275.250
		Iin(A)	1.452	2.412	3.489	4.602	5.746	6.916	8.072	9.251	10.443	11.674
		PF	0.821	0.939	0.964	0.972	0.972	0.970	0.970	0.969	0.968	0.964
		Pin(W)	329.300	625.160	928.650	1233.70	1540.80	1849.30	2158.90	2470.40	2783.20	3096.70
		THDI(%)	26.837	16.550	13.978	14.532	15.248	16.258	17.107	17.668	18.230	20.729
		Vout(V)	58.073	58.060	58.050	58.041	58.027	58.014	58.010	58.011	57.999	57.990
		Iout(A)	5.168	10.339	15.511	20.675	25.847	31.018	36.190	41.364	46.533	51.698
		Pout(W)	300.106	600.312	900.434	1199.97	1499.80	1799.50	2099.39	2399.55	2698.85	2997.97
		Eff(%)	91.14	96.03	96.96	97.27	97.34	97.31	97.24	97.13	96.97	96.81
55 °C	Vin=85Vac/50Hz	42.0Vout										
		load	0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
		Vin(V)	85.250	85.113	84.973	84.840	84.690	84.544	84.392	84.279	84.165	84.018
		Iin(A)	1.647	3.132	4.605	6.003	7.473	8.971	10.503	12.107	13.702	15.283
		PF	0.969	0.986	0.992	0.995	0.998	0.998	0.996	0.991	0.987	0.987
		Pin(W)	135.960	262.920	388.360	506.710	631.740	756.890	883.130	1010.80	1138.50	1267.00
		THDI(%)	21.365	14.852	11.304	9.315	4.957	4.344	3.780	3.257	2.820	2.535
		Vout(V)	42.034	42.036	42.028	42.024	42.020	42.022	42.014	42.009	42.000	41.990
		Iout(A)	2.795	5.599	8.396	11.194	14.000	16.798	19.595	22.401	25.199	27.995
		Pout(W)	117.482	235.347	352.865	470.428	588.298	705.866	823.279	941.054	1058.36	1175.55

		Eff(%)	86.4 1	89.5 1	90.8 6	92.8 4	93.1 2	93.2 6	93.2 2	93.1 0	92.9 6	92.7 8
	Vin=100Va c/50Hz	42.0Vout										
		load	0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
		Vin(V)	100. 320	100. 170	100. 030	99.8 77	99.7 22	99.5 67	99.4 23	99.2 82	99.1 45	98.9 95
		lin(A)	1.71 5	3.27 8	4.77 2	6.30 4	7.86 0	9.43 7	11.0 30	12.6 77	14.3 65	16.0 53
		PF	0.96 9	0.98 7	0.99 3	0.99 8	0.99 9	0.99 9	0.99 8	0.99 6	0.99 2	0.99 1
		Pin(W)	166. 710	324. 080	473. 880	628. 460	782. 720	938. 180	1094 .50	1253 .10	1413 .20	1574 .40
		THDI (%)	20.4 56	14.1 88	10.9 14	5.08 5	4.23 3	3.83 9	3.33 3	2.83 5	2.42 7	2.20 7
		Vout(V)	42.0 38	42.0 45	42.0 26	42.0 22	42.0 16	42.0 04	41.9 92	41.9 92	41.9 68	41.9 68
		Iout(A)	3.49 4	6.99 7	10.4 95	14.0 00	17.4 97	20.9 94	24.4 99	27.9 96	31.5 00	34.9 98
		Pout(W)	146. 881	294. 206	441. 083	588. 326	735. 161	881. 847	1028 .75	1175 .60	1321 .98	1468 .79
		Eff(%)	88.1 1	90.7 8	93.0 8	93.6 1	93.9 2	94.0 0	93.9 9	93.8 2	93.5 5	93.2 9
		Vin=110Va c/50Hz	42.0Vout									
	load		0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
	Vin(V)		110. 340	110. 190	110. 040	109. 880	109. 720	109. 550	109. 400	109. 250	109. 100	108. 950
	lin(A)		1.76 5	3.36 6	4.92 8	6.51 4	8.12 6	9.75 6	11.4 09	13.1 00	14.8 32	16.6 08
	PF		0.96 9	0.98 7	0.99 3	0.99 8	0.99 9	0.99 9	0.99 9	0.99 7	0.99 5	0.99 3
	Pin(W)		188. 650	366. 220	538. 350	714. 710	890. 490	1067 .60	1246 .50	1427 .20	1610 .00	1796 .30
	THDI (%)		19.9 44	13.6 90	10.5 37	4.71 1	3.91 2	3.51 0	3.02 7	2.61 4	2.25 2	2.01 5
	Vout(V)		42.0 36	42.0 29	42.0 16	42.0 14	42.0 04	42.0 01	41.9 80	41.9 68	41.9 58	41.9 53
	Iout(A)		3.99 9	7.99 5	11.9 98	15.9 94	19.9 97	24.0 00	27.9 96	32.0 00	35.9 96	39.9 99
	Pout(W)		168. 113	336. 004	504. 098	671. 966	839. 962	1008 .04	1175 .26	1342 .97	1510 .31	1678 .12
	Eff(%)		89.1 1	91.7 5	93.6 4	94.0 2	94.3 3	94.4 2	94.2 9	94.1 0	93.8 1	93.4 2
Vin=180Va	42.0Vout											

	c/50Hz	load	0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
		Vin(V)	180.750	180.620	180.470	180.320	180.170	180.020	179.860	179.710	179.560	179.400
		Iin(A)	1.637	3.111	4.574	6.082	7.608	9.159	10.727	12.303	13.896	15.511
		PF	0.963	0.982	0.997	0.998	0.999	0.999	0.999	0.999	0.999	0.999
		Pin(W)	284.960	551.790	823.050	1094.90	1369.30	1647.30	1928.10	2209.40	2492.60	2779.10
		THDI(%)	9.572	12.545	5.486	4.467	3.699	3.123	2.891	2.540	2.293	2.106
		Vout(V)	42.031	42.022	42.010	42.000	41.966	41.955	41.945	41.931	41.921	41.916
		Iout(A)	6.245	12.496	18.748	24.997	31.247	37.498	43.750	50.001	56.252	62.504
		Pout(W)	262.502	525.121	787.603	1049.91	1311.32	1573.23	1835.12	2096.59	2358.11	2619.92
		Eff(%)	92.12	95.17	95.69	95.89	95.77	95.50	95.18	94.89	94.60	94.27
	Vin=220Vac/50Hz	42.0Vout										
		load	0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
		Vin(V)	220.960	220.840	220.730	220.610	220.490	220.360	220.230	220.110	219.990	219.870
		Iin(A)	1.417	2.559	3.746	4.968	6.207	7.465	8.735	10.014	11.313	12.625
		PF	0.924	0.976	0.994	0.997	0.998	0.998	0.999	0.999	0.999	0.999
		Pin(W)	289.240	551.750	822.040	1092.70	1365.80	1642.20	1920.80	2199.80	2480.40	2764.00
		THDI(%)	14.235	9.588	5.429	4.640	3.893	3.332	3.019	2.771	2.516	2.270
		Vout(V)	42.028	42.021	42.003	41.993	41.959	41.962	41.938	41.924	41.910	41.914
		Iout(A)	6.247	12.496	18.749	24.999	31.248	37.500	43.750	50.001	56.254	62.504
		Pout(W)	262.539	525.110	787.490	1049.78	1311.13	1573.56	1834.77	2096.24	2357.61	2619.77
		Eff(%)	90.77	95.17	95.80	96.07	96.00	95.82	95.52	95.29	95.05	94.78
	Vin=230Vac/50Hz	42.0Vout										
		load	0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
		Vin(V)	230.990	230.880	230.770	230.660	230.540	230.420	230.290	230.180	230.070	229.950

		Iin(A)	1.37 7	2.45 8	3.58 7	4.75 3	5.93 7	7.14 1	8.35 4	9.58 3	10.8 26	12.0 73
		PF	0.91 0	0.97 2	0.99 3	0.99 6	0.99 7	0.99 8	0.99 8	0.99 7	0.99 5	0.99 5
		Pin(W)	289. 350	551. 920	822. 020	1092 .40	1365 .30	1641 .30	1919 .70	2198 .50	2478 .80	2761 .50
		THDI (%)	16.3 33	8.96 2	5.20 3	4.48 8	3.81 1	3.33 3	3.04 2	2.75 1	2.54 5	2.29 0
		Vout(V)	42.0 30	42.0 08	42.0 05	41.9 88	41.9 60	41.9 47	41.9 36	41.9 26	41.9 18	41.9 14
		Iout(A)	6.24 6	12.4 97	18.7 48	24.9 98	31.2 48	37.4 99	43.7 50	50.0 01	56.2 52	62.5 04
		Pout(W)	262. 521	524. 982	787. 514	1049 .62	1311 .17	1572 .99	1834 .67	2096 .35	2358 .01	2619 .81
		Eff(%)	90.7 3	95.1 2	95.8 0	96.0 8	96.0 4	95.8 4	95.5 7	95.3 5	95.1 3	94.8 7
	Vin=275Vac /50Hz	42.0Vout										
		load	0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
		Vin(V)	276. 230	276. 150	276. 060	275. 960	275. 870	275. 740	275. 620	275. 540	275. 450	275. 360
		Iin(A)	1.32 8	2.16 9	3.12 0	4.10 3	5.09 8	6.13 4	7.16 7	8.20 3	9.25 4	10.3 24
		PF	0.79 3	0.92 8	0.96 0	0.97 0	0.97 4	0.97 2	0.97 2	0.97 2	0.97 1	0.97 0
		Pin(W)	290. 850	556. 140	826. 640	1097 .90	1369 .50	1644 .10	1920 .30	2197 .50	2476 .20	2757 .90
		THDI (%)	27.4 49	17.0 94	14.2 26	14.0 19	14.1 30	14.7 65	15.2 85	16.0 30	16.2 77	17.2 10
		Vout(V)	42.0 34	42.0 28	41.9 95	41.9 99	41.9 91	41.9 68	41.9 50	41.9 37	41.9 16	41.9 12
		Iout(A)	6.24 6	12.4 97	18.7 48	24.9 98	31.2 48	37.4 98	43.7 50	50.0 01	56.2 53	62.5 04
		Pout(W)	262. 556	525. 220	787. 339	1049 .91	1312 .15	1573 .72	1835 .31	2096 .92	2357 .90	2619 .67
		Eff(%)	90.2 7	94.4 4	95.2 5	95.6 3	95.8 1	95.7 2	95.5 7	95.4 2	95.2 2	94.9 9
	Vin=85Vac /50Hz	53.5Vout										
		load	0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
		Vin(V)	85.2 33	85.0 83	84.9 19	84.7 71	84.6 16	84.4 65	84.3 30	84.2 10	84.0 72	83.9 15
		Iin(A)	1.73 5	3.29 5	4.88 1	6.23 8	7.83 1	9.36 1	10.9 58	12.6 39	14.3 07	15.9 59
		PF	0.96	0.98	0.99	0.99	0.99	0.99	0.99	0.98	0.98	0.98

			8	6	2	5	6	8	5	9	6	5
		Pin(W)	143.170	276.480	411.280	526.140	660.130	788.820	919.390	1052.30	1185.60	1319.70
		THDI(%)	22.240	15.195	11.535	9.351	8.020	4.398	3.820	3.267	2.924	2.635
		Vout(V)	53.608	53.588	53.596	53.535	53.575	53.545	53.532	53.525	53.519	53.513
		Iout(A)	2.297	4.594	6.893	9.192	11.500	13.799	16.097	18.398	20.696	22.995
		Pout(W)	123.132	246.204	369.457	492.101	616.106	738.861	861.699	984.717	1107.66	1230.50
		Eff(%)	86.00	89.05	89.83	93.53	93.59	93.67	93.73	93.58	93.43	93.24
	Vin=100Vac/50Hz	53.5Vout										
		load	0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
		Vin(V)	100.310	100.160	100.010	99.865	99.704	99.554	99.415	99.272	99.140	98.999
		Iin(A)	1.712	3.257	4.798	6.161	7.681	9.221	10.775	12.375	14.030	15.688
		PF	0.966	0.986	0.992	0.995	0.998	0.999	0.998	0.996	0.992	0.990
		Pin(W)	165.880	321.550	476.070	612.080	764.660	916.800	1069.30	1223.70	1380.10	1536.90
		THDI(%)	21.784	15.055	11.439	9.283	4.638	3.980	3.442	3.134	2.723	2.404
		Vout(V)	53.604	53.582	53.593	53.539	53.561	53.534	53.528	53.516	53.516	53.505
		Iout(A)	2.697	5.397	8.098	10.800	13.493	16.194	18.896	21.596	24.298	26.999
		Pout(W)	144.582	289.205	434.020	578.224	722.725	866.917	1011.45	1155.76	1300.33	1444.57
		Eff(%)	87.16	89.94	91.17	94.47	94.52	94.56	94.59	94.45	94.22	93.99
	Vin=110Vac/50Hz	53.5Vout										
		load	0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
		Vin(V)	110.340	110.180	110.030	109.880	109.710	109.540	109.390	109.240	109.090	108.950
		Iin(A)	1.771	3.375	4.876	6.415	7.966	9.577	11.196	12.848	14.549	16.266
		PF	0.966	0.986	0.992	0.995	0.999	0.999	0.999	0.997	0.995	0.992
		Pin(W)	188.840	366.610	532.530	701.310	872.770	1048.00	1223.10	1400.00	1578.90	1758.60

		THDI (%)	21.063	14.622	11.003	9.128	4.223	3.576	3.266	2.868	2.500	2.152
		Vout(V)	53.600	53.598	53.551	53.566	53.539	53.532	53.531	53.512	53.504	53.501
		Iout(A)	3.100	6.194	9.296	12.400	15.495	18.597	21.694	24.797	27.899	30.994
		Pout(W)	166.135	331.992	497.826	664.206	829.591	995.554	1161.28	1326.91	1492.72	1658.25
		Eff(%)	87.98	90.56	93.48	94.71	95.05	95.00	94.95	94.78	94.54	94.29
	Vin=180Vac/50Hz	53.5Vout										
		load	0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
		Vin(V)	180.730	180.570	180.400	180.230	180.050	179.870	179.700	179.530	179.350	179.180
		Iin(A)	1.881	3.510	5.171	6.889	8.620	10.375	12.146	13.942	15.754	17.574
		PF	0.967	0.984	0.997	0.999	0.999	0.999	0.999	0.999	0.999	0.999
		Pin(W)	328.840	623.850	930.650	1239.80	1550.60	1864.80	2181.30	2501.30	2823.20	3145.80
		THDI (%)	12.708	12.444	5.264	4.324	3.490	3.009	2.623	2.407	2.238	2.146
		Vout(V)	53.600	53.548	53.541	53.526	53.497	53.495	53.480	53.480	53.481	53.458
		Iout(A)	5.599	11.195	16.798	22.400	27.995	33.600	39.195	44.799	50.403	55.999
		Pout(W)	300.095	599.450	899.359	1198.97	1497.66	1797.40	2096.14	2395.85	2695.59	2993.59
		Eff(%)	91.26	96.09	96.64	96.71	96.59	96.39	96.10	95.78	95.48	95.16
	Vin=220Vac/50Hz	53.5Vout										
		load	0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
		Vin(V)	220.930	220.810	220.670	220.540	220.400	220.240	219.090	219.950	219.820	219.680
		Iin(A)	1.599	2.889	4.232	5.623	7.028	8.450	9.885	11.333	12.804	14.277
		PF	0.944	0.977	0.995	0.997	0.998	0.999	0.999	0.999	0.997	0.996
		Pin(W)	333.540	623.510	929.340	1236.80	1546.30	1858.50	2172.80	2489.10	2807.50	3125.10
		THDI (%)	9.585	11.560	5.479	4.623	3.838	3.286	2.902	2.701	2.437	2.238
		Vout(V)	53.5	53.5	53.5	53.5	53.5	53.4	53.4	53.4	53.4	53.4

		V)	86	36	29	20	12	97	92	76	74	56
		Iout(A)	5.599	11.195	16.798	22.401	27.997	33.600	39.195	44.799	50.403	56.000
		Pout(W)	300.036	599.339	899.194	1198.90	1498.17	1797.51	2096.62	2395.71	2695.25	2993.51
		Eff(%)	89.96	96.12	96.76	96.94	96.89	96.72	96.49	96.25	96.00	95.79
	Vin=230Vac/50Hz	53.5Vout										
		load	0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
		Vin(V)	230.970	230.850	230.720	230.590	230.460	230.320	230.170	230.030	229.900	229.770
		Iin(A)	1.555	2.768	4.051	5.379	6.722	8.078	9.449	10.836	12.247	13.648
		PF	0.931	0.976	0.994	0.997	0.998	0.998	0.998	0.998	0.996	0.996
		Pin(W)	334.440	623.570	929.240	1236.40	1545.90	1857.40	2171.40	2487.60	2805.20	3122.20
		THDI(%)	13.881	10.320	5.311	4.497	3.739	3.231	2.917	2.692	2.461	2.253
		Vout(V)	53.587	53.537	53.531	53.518	53.514	53.498	53.495	53.484	53.469	53.460
		Iout(A)	5.599	11.195	16.798	22.401	27.996	33.600	39.195	44.799	50.402	56.000
		Pout(W)	300.036	599.350	899.235	1198.88	1498.17	1797.55	2096.74	2396.05	2694.95	2993.78
		Eff(%)	89.71	96.12	96.77	96.97	96.91	96.78	96.56	96.32	96.07	95.89
	Vin=275Vac/50Hz	53.5Vout										
		load	0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
		Vin(V)	276.220	276.120	276.020	275.910	275.810	275.700	275.560	275.450	275.350	275.260
		Iin(A)	1.449	2.416	3.497	4.609	5.756	6.928	8.092	9.273	10.474	11.723
		PF	0.822	0.940	0.965	0.972	0.973	0.971	0.972	0.972	0.970	0.965
		Pin(W)	329.230	627.010	931.150	1236.70	1545.30	1855.80	2167.70	2481.60	2797.40	3113.20
		THDI(%)	26.489	16.590	14.311	14.161	14.636	15.722	15.928	16.651	17.103	20.049
		Vout(V)	53.595	53.584	53.569	53.529	53.511	53.499	53.491	53.488	53.474	53.459
		Iout(A)	5.599	11.195	16.798	22.401	27.996	33.600	39.196	44.800	50.402	56.000

		Pout(W)	300.060	599.870	899.844	1199.09	1498.11	1797.55	2096.63	2396.24	2695.19	2993.72
		Eff(%)	91.14	95.67	96.64	96.96	96.95	96.86	96.72	96.56	96.35	96.16
Vin=85Vac /50Hz	58.0Vout											
	load	0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00	
	Vin(V)	85.238	85.093	84.938	84.777	84.637	84.495	84.357	84.248	84.133	83.985	
	Iin(A)	1.754	3.245	4.762	6.261	7.728	9.262	10.836	12.501	14.157	15.783	
	PF	0.967	0.985	0.992	0.994	0.996	0.996	0.995	0.989	0.985	0.985	
	Pin(W)	144.550	272.050	401.110	527.900	651.410	779.740	909.870	1041.70	1173.30	1305.40	
	THDI(%)	22.722	15.750	12.009	9.770	8.290	7.183	3.986	3.379	3.001	2.721	
	Vout(V)	58.104	58.054	58.052	58.048	58.042	58.051	58.041	58.038	58.034	58.026	
	Iout(A)	2.097	4.194	6.299	8.397	10.496	12.594	14.700	16.798	18.897	20.993	
	Pout(W)	121.819	243.477	365.650	487.421	609.207	731.077	853.216	974.954	1096.66	1218.16	
	Eff(%)	84.28	89.50	91.16	92.33	93.52	93.76	93.77	93.59	93.47	93.32	
Vin=100Vac /50Hz	58.0Vout											
	load	0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00	
	Vin(V)	100.320	100.180	100.030	99.902	99.753	99.581	99.432	99.300	99.177	99.046	
	Iin(A)	1.749	3.235	4.753	6.199	7.725	9.257	10.816	12.419	14.078	15.743	
	PF	0.965	0.985	0.991	0.994	0.996	0.999	0.998	0.996	0.992	0.989	
	Pin(W)	169.320	319.150	471.490	615.800	767.540	920.560	1073.60	1228.60	1384.90	1541.90	
	THDI(%)	22.283	15.593	11.919	9.705	8.155	4.041	3.580	3.129	2.809	2.472	
	Vout(V)	58.122	58.040	58.059	58.049	58.038	58.037	58.029	58.035	58.020	58.014	
	Iout(A)	2.498	4.996	7.496	9.997	12.497	14.998	17.498	19.997	22.497	24.998	
	Pout(W)	145.161	289.994	435.220	580.331	725.300	870.423	1015.41	1160.52	1305.30	1450.23	
	Eff(%)	85.7	90.8	92.3	94.2	94.5	94.5	94.5	94.4	94.2	94.0	

		%)	3	7	1	4	0	5	8	6	5	6
Vin=110Va c/50Hz	58.0Vout											
	load	0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00	
	Vin(V)	110. 340	110. 190	110. 040	109. 900	109. 730	109. 570	109. 400	109. 260	109. 120	108. 980	
	Iin(A)	1.82 5	3.37 8	4.95 4	6.49 5	8.08 6	9.71 3	11.3 55	13.0 31	14.7 57	16.4 66	
	PF	0.96 6	0.98 5	0.99 2	0.99 5	0.99 9	0.99 9	0.99 9	0.99 7	0.99 4	0.99 1	
	Pin(W)	194. 510	366. 770	540. 760	710. 120	886. 160	1063 .00	1240 .60	1419 .80	1600 .90	1779 .30	
	THDI (%)	21.5 98	14.9 99	11.4 24	9.29 0	4.27 2	3.62 5	3.32 1	2.95 4	2.51 3	2.25 2	
	Vout(V)	58.1 23	58.0 46	58.0 52	58.0 50	58.0 34	58.0 27	58.0 38	58.0 23	58.0 19	57.7 87	
	Iout(A)	2.89 9	5.80 0	8.69 4	11.5 97	14.4 99	17.4 03	20.2 95	23.1 97	26.0 99	29.0 00	
	Pout(W)	168. 512	336. 673	504. 728	673. 227	841. 420	1009 .85	1177 .90	1345 .95	1514 .24	1675 .81	
	Eff(%)	86.6 3	91.7 9	93.3 4	94.8 1	94.9 5	95.0 0	94.9 5	94.8 0	94.5 9	94.1 8	
Vin=180Va c/50Hz	58.0Vout											
	load	0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00	
	Vin(V)	180. 730	180. 580	180. 410	180. 250	180. 080	179. 900	179. 730	179. 560	179. 390	179. 220	
	Iin(A)	1.85 9	3.52 3	5.17 9	6.89 2	8.62 2	10.3 73	12.1 37	13.9 20	15.7 20	17.5 32	
	PF	0.96 6	0.98 3	0.99 7	0.99 9	0.99 9	0.99 9	0.99 9	0.99 9	0.99 9	0.99 9	
	Pin(W)	324. 660	625. 550	931. 960	1240 .30	1551 .10	1864 .80	2180 .10	2498 .00	2817 .80	3139 .10	
	THDI (%)	13.0 88	13.3 80	5.45 9	4.45 5	3.65 1	3.07 9	2.73 4	2.39 4	2.19 3	2.13 1	
	Vout(V)	58.0 40	58.0 38	58.0 19	58.0 22	58.0 08	58.0 11	57.9 92	57.9 93	57.9 80	57.9 74	
	Iout(A)	5.16 7	10.3 40	15.5 11	20.6 74	25.8 46	31.0 18	36.1 88	41.3 63	46.5 32	51.6 97	
	Pout(W)	299. 901	600. 093	899. 927	1199 .55	1499 .28	1799 .37	2098 .64	2398 .73	2697 .92	2997 .12	
	Eff(%)	92.3 7	95.9 3	96.5 6	96.7 1	96.6 6	96.4 9	96.2 6	96.0 3	95.7 5	95.4 8	
Vin=220Va c/50Hz	58.0Vout											
	load	0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00	

		Vin(V)	220.940	220.810	220.680	220.550	220.410	220.270	220.130	219.980	219.840	219.710
		Iin(A)	1.588	2.901	4.240	5.626	7.031	8.446	9.875	11.317	12.779	14.246
		PF	0.942	0.976	0.995	0.997	0.998	0.999	0.999	0.999	0.997	0.996
		Pin(W)	330.360	625.470	930.840	1237.50	1547.00	1858.00	2171.10	2485.80	2802.20	3119.00
		THDI(%)	11.286	12.564	5.697	4.715	3.961	3.373	3.004	2.647	2.445	2.271
		Vout(V)	58.050	58.051	58.032	58.017	58.016	58.001	58.006	57.994	57.981	57.980
		Iout(A)	5.168	10.340	15.512	20.675	25.847	31.018	36.188	41.364	46.534	51.697
		Pout(W)	300.027	600.246	900.175	1199.50	1499.55	1799.10	2099.14	2398.83	2698.06	2997.40
		Eff(%)	90.82	95.97	96.71	96.93	96.93	96.83	96.69	96.50	96.28	96.10
	Vin=230Vac/50Hz	58.0Vout										
		load	0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
		Vin(V)	230.970	230.850	230.720	230.600	230.470	230.340	230.200	230.050	229.920	229.800
		Iin(A)	1.546	2.779	4.059	5.383	6.724	8.075	9.440	10.822	12.222	13.618
		PF	0.928	0.975	0.994	0.997	0.998	0.999	0.999	0.999	0.998	0.996
		Pin(W)	331.220	625.640	930.800	1237.30	1546.40	1857.20	2169.90	2484.40	2800.10	3116.00
		THDI(%)	15.236	11.157	5.533	4.679	3.916	3.361	2.948	2.657	2.426	2.239
		Vout(V)	58.049	58.051	58.027	58.019	58.017	58.003	58.004	58.001	57.987	57.984
		Iout(A)	5.169	10.339	15.511	20.675	25.847	31.018	36.190	41.364	46.533	51.698
		Pout(W)	300.031	600.183	900.051	1199.53	1499.55	1799.17	2099.13	2399.13	2698.35	2997.69
		Eff(%)	90.58	95.93	96.70	96.95	96.97	96.88	96.74	96.57	96.37	96.20
	Vin=275Vac/50Hz	58.0Vout										
		load	0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
		Vin(V)	276.220	276.120	276.020	275.920	275.810	275.700	275.610	275.490	275.360	275.260
		Iin(A)	1.45	2.41	3.49	4.60	5.75	6.92	8.08	9.26	10.4	11.6

			2	4	5	9	8	3	2	0	57	93
		PF	0.82 3	0.94 0	0.96 5	0.97 2	0.97 3	0.97 2	0.97 2	0.97 1	0.97 0	0.96 5
		Pin(W)	329. 920	626. 450	930. 530	1236 .50	1544 .80	1854 .60	2165 .50	2478 .30	2792 .50	3106 .00
		THDI (%)	26.9 69	16.7 22	14.6 50	14.2 88	14.7 37	15.5 89	16.1 21	16.4 74	17.4 47	19.2 85
		Vout(V)	58.0 51	58.0 57	58.0 33	58.0 31	58.0 17	58.0 09	58.0 02	57.9 92	57.9 90	57.9 70
		Iout(A)	5.16 9	10.3 40	15.5 11	20.6 76	25.8 48	31.0 18	36.1 90	41.3 64	46.5 33	51.6 98
		Pout(W)	300. 039	600. 315	900. 168	1199 .86	1499 .61	1799 .35	2099 .11	2398 .73	2698 .49	2996 .95
		Eff(%)	90.9 4	95.8 3	96.7 4	97.0 4	97.0 8	97.0 2	96.9 3	96.7 9	96.6 3	96.4 9

2#												
-15 ℃	Vin=85Vac /50Hz	42.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %
		Vin(V)	85.2 56	85.1 09	84.9 61	84.7 98	84.6 73	84.5 21	84.3 80	84.2 56	84.1 28	83.9 80
		Iin(A)	1.60 0	3.07 8	4.54 1	5.94 5	7.41 7	8.91 5	10.4 49	12.0 60	13.6 51	15.2 24
		PF	0.97 1	0.98 8	0.99 3	0.99 5	0.99 8	0.99 8	0.99 6	0.99 0	0.98 7	0.98 6
		Pin(W)	132. 440	258. 780	383. 210	501. 850	626. 850	752. 100	878. 240	1006 .00	1133 .10	1261 .20
		THDI (%)	20.0 74	13.7 86	10.5 17	8.57 2	4.45 6	3.89 2	3.35 9	2.97 8	2.56 6	2.26 1
		Vout(V)	42.0 48	42.0 44	42.0 40	42.0 26	42.0 27	42.0 32	42.0 21	42.0 24	42.0 14	42.0 11
		Iout(A)	2.79 4	5.59 8	8.39 6	11.1 94	14.0 00	16.7 97	19.5 95	22.4 00	25.1 98	27.9 94
		Pout(W)	117. 503	235. 349	352. 955	470. 446	588. 361	706. 033	823. 420	941. 329	1058 .68	1176 .03
		Eff(%)	88.7 2	90.9 5	92.1 1	93.7 4	93.8 6	93.8 8	93.7 6	93.5 7	93.4 3	93.2 5
	Vin=100Vac /50Hz	42.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %
		Vin(V)	100. 320	100. 160	100. 000	99.8 52	99.6 99	99.5 41	99.3 90	99.2 64	99.1 29	98.9 76

		Iin(A)	1.68 4	3.24 7	4.71 6	6.25 5	7.82 0	9.39 7	10.9 96	12.6 43	14.3 35	16.0 16
		PF	0.97 2	0.98 9	0.99 4	0.99 8	0.99 9	0.99 9	0.99 8	0.99 5	0.99 2	0.99 0
		Pin(W)	164. 110	321. 540	468. 610	623. 680	778. 730	934. 230	1090 .80	1249 .10	1409 .30	1569 .90
		THDI (%)	18.6 25	12.9 67	9.89 4	4.39 9	3.70 1	3.29 0	2.83 8	2.48 8	2.05 6	1.79 9
		Vout(V)	42.0 56	42.0 50	42.0 37	42.0 42	42.0 42	42.0 32	42.0 18	42.0 11	41.9 99	42.0 00
		Iout(A)	3.49 3	6.99 7	10.4 95	13.9 99	17.4 98	20.9 93	24.4 98	27.9 94	31.4 99	34.9 97
		Pout(W)	146. 914	294. 210	441. 175	588. 567	735. 635	882. 363	1029 .34	1176 .09	1322 .94	1469 .87
		Eff(%)	89.5 2	91.5 0	94.1 5	94.3 7	94.4 7	94.4 5	94.3 7	94.1 6	93.8 7	93.6 3
	Vin=110Vac/50Hz	42.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %
		Vin(V)	110. 350	110. 190	110. 040	109. 870	109. 690	109. 530	109. 370	109. 220	109. 070	108. 920
		Iin(A)	1.74 5	3.34 2	4.88 8	6.47 6	8.09 3	9.72 7	11.3 80	13.0 78	14.8 13	16.5 78
		PF	0.97 1	0.98 9	0.99 4	0.99 9	0.99 9	0.99 9	0.99 9	0.99 7	0.99 4	0.99 2
		Pin(W)	187. 100	364. 140	534. 510	710. 600	886. 830	1064 .50	1243 .10	1424 .20	1606 .70	1791 .70
		THDI (%)	17.8 94	12.4 84	9.53 8	3.87 7	3.47 7	2.89 7	2.52 7	2.20 6	1.82 7	1.64 0
		Vout(V)	42.0 67	42.0 51	42.0 50	42.0 55	42.0 39	42.0 38	42.0 20	42.0 05	41.9 91	41.9 90
		Iout(A)	4.00 1	7.99 4	11.9 98	15.9 93	19.9 96	24.0 00	27.9 95	32.0 00	35.9 95	39.9 99
		Pout(W)	168. 291	336. 160	504. 500	672. 581	840. 608	1008 .91	1176 .34	1344 .14	1511 .48	1679 .58
		Eff(%)	89.9 5	92.3 2	94.3 9	94.6 5	94.7 9	94.7 8	94.6 3	94.3 8	94.0 7	93.7 4
	Vin=180Vac/50Hz	42.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %
		Vin(V)	180. 770	180. 590	180. 440	180. 290	180. 150	180. 000	179. 850	179. 700	179. 540	179. 390
		Iin(A)	1.64	3.11	4.57	6.07	7.59	9.13	10.6	12.2	13.8	15.4

			5	1	1	3	3	2	89	60	46	48
		PF	0.963	0.984	0.998	0.999	0.999	0.999	0.999	0.999	0.999	0.999
		Pin(W)	286.430	552.750	822.890	1093.50	1366.60	1642.50	1921.40	2201.80	2483.10	2767.30
		THDI(%)	7.985	10.644	4.051	3.354	2.731	2.296	2.039	1.812	1.495	1.397
		Vout(V)	42.056	42.042	42.029	42.014	42.004	41.987	41.970	41.964	41.948	41.948
		Iout(A)	6.246	12.496	18.748	24.997	31.247	37.499	43.750	50.001	56.253	62.504
		Pout(W)	262.667	525.356	787.943	1050.23	1312.50	1574.45	1836.19	2098.25	2359.68	2621.93
		Eff(%)	91.70	95.04	95.75	96.04	96.04	95.86	95.57	95.30	95.03	94.75
	Vin=220Vac/50Hz	42.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	220.980	220.870	220.740	220.600	220.470	220.350	220.230	220.110	219.980	219.860
		Iin(A)	1.426	2.560	3.742	4.959	6.193	7.440	8.705	9.983	11.282	12.585
		PF	0.919	0.977	0.995	0.997	0.998	0.999	0.999	0.998	0.996	0.995
		Pin(W)	289.620	552.250	821.600	1091.00	1362.90	1637.00	1914.60	2192.70	2472.60	2753.80
		THDI(%)	15.919	7.438	3.723	3.314	2.704	2.268	2.100	1.859	1.700	1.447
		Vout(V)	42.050	42.036	42.032	42.011	41.988	41.974	41.962	41.960	41.949	41.943
		Iout(A)	6.246	12.497	18.748	24.998	31.247	37.499	43.750	50.000	56.252	62.503
		Pout(W)	262.663	525.318	787.998	1050.19	1312.01	1573.99	1835.82	2098.02	2359.74	2621.57
		Eff(%)	90.69	95.12	95.91	96.26	96.27	96.15	95.89	95.68	95.44	95.20
	Vin=230Vac/50Hz	42.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	231.020	230.900	230.780	230.640	230.530	230.410	230.300	230.180	230.070	229.940
		Iin(A)	1.383	2.457	3.583	4.744	5.923	7.117	8.325	9.556	10.791	12.033

		PF	0.90 6	0.97 3	0.99 3	0.99 7	0.99 8	0.99 8	0.99 8	0.99 6	0.99 5	0.99 4
		Pin(W)	289. 440	552. 210	821. 260	1090 .50	1362 .10	1635 .90	1912 .90	2191 .60	2470 .40	2751 .20
		THDI (%)	17.3 90	6.80 5	3.71 3	3.23 7	2.57 7	2.34 7	2.05 8	1.91 1	1.70 6	1.54 8
		Vout(V)	42.0 64	42.0 41	42.0 29	42.0 07	41.9 89	41.9 72	41.9 64	41.9 65	41.9 47	41.9 37
		Iout(A)	6.24 7	12.4 96	18.7 48	24.9 98	31.2 47	37.4 99	43.7 49	50.0 01	56.2 52	62.5 04
		Pout(W)	262. 775	525. 361	787. 959	1050 .11	1312 .05	1573 .92	1835 .89	2098 .30	2359 .61	2621 .21
		Eff(%)	90.7 9	95.1 4	95.9 5	96.3 0	96.3 3	96.2 1	95.9 7	95.7 4	95.5 2	95.2 8
	Vin=275Vac/50Hz	42.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %
		Vin(V)	220. 980	220. 850	220. 710	220. 590	220. 470	220. 370	220. 240	220. 100	219. 980	219. 850
		Iin(A)	1.42 4	2.56 1	3.74 1	4.95 8	6.19 1	7.43 8	8.70 2	9.98 0	11.2 83	12.5 82
		PF	0.91 9	0.97 6	0.99 5	0.99 7	0.99 8	0.99 8	0.99 9	0.99 8	0.99 6	0.99 5
		Pin(W)	289. 310	551. 990	821. 230	1090 .70	1362 .50	1636 .70	1914 .00	2192 .30	2472 .50	2753 .30
		THDI (%)	16.0 91	7.97 5	3.85 4	3.27 1	2.83 9	2.31 7	2.09 0	1.84 5	1.68 1	1.47 4
		Vout(V)	42.0 56	42.0 36	42.0 25	42.0 11	41.9 83	41.9 79	41.9 67	41.9 52	41.9 54	41.9 40
		Iout(A)	6.24 6	12.4 96	18.7 47	24.9 98	31.2 47	37.4 99	43.7 50	50.0 01	56.2 53	62.5 04
		Pout(W)	262. 704	525. 294	787. 852	1050 .17	1311 .86	1574 .16	1836 .06	2097 .67	2360 .02	2621 .38
		Eff(%)	90.8 0	95.1 6	95.9 4	96.2 8	96.2 8	96.1 8	95.9 3	95.6 8	95.4 5	95.2 1
	Vin=85Vac/50Hz	53.5Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %
		Vin(V)	85.2 4	85.0 9	84.9 2	84.7 7	84.6 1	84.4 5	84.3 2	84.1 8	84.0 5	83.9 1
		Iin(A)	1.72	3.27	4.84	6.16	7.73	9.25	10.8 5	12.5 3	14.1 9	15.8 2
		PF	0.97	0.99	0.99	1.00	1.00	1.00	1.00	0.99	0.99	0.99

		Pin(W)	141.97	274.87	407.86	520.12	651.95	779.63	910.12	1042.20	1174.50	1307.50
		THDI(%)	20.67	14.07	10.67	8.64	7.42	3.96	3.45	2.91	2.61	2.34
		Vout(V)	53.57	53.57	53.57	53.52	53.55	53.53	53.52	53.50	53.50	53.51
		Iout(A)	2.30	4.59	6.89	9.19	11.50	13.80	16.10	18.40	20.70	22.99
		Pout(W)	122.97	246.01	369.23	491.91	615.76	738.58	861.39	984.18	1107.29	1230.26
		Eff(%)	86.62	89.50	90.53	94.58	94.62	94.74	94.65	94.43	94.28	94.09
	Vin=100Vac/50Hz	53.5Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	100.32	100.13	99.99	99.86	99.71	99.56	99.43	99.27	99.12	98.97
		Iin(A)	1.70	3.25	4.73	6.10	7.61	9.14	10.68	12.28	13.94	15.59
		PF	0.97	0.99	0.99	1.00	1.00	1.00	1.00	1.00	0.99	0.99
		Pin(W)	165.73	321.26	469.46	606.83	758.02	908.70	1060.60	1214.70	1370.40	1526.10
		THDI(%)	19.93	13.78	10.56	8.45	4.01	3.45	2.96	2.73	2.34	2.02
		Vout(V)	53.59	53.58	53.56	53.53	53.54	53.52	53.51	53.51	53.52	53.51
		Iout(A)	2.70	5.40	8.10	10.80	13.49	16.19	18.89	21.60	24.30	27.00
		Pout(W)	144.54	289.13	433.66	578.08	722.39	866.67	1011.09	1155.51	1300.24	1444.54
		Eff(%)	87.21	90.00	92.37	95.26	95.30	95.38	95.33	95.13	94.88	94.66
	Vin=110Vac/50Hz	53.5Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	110.340	110.140	110.000	109.850	109.700	109.550	109.370	109.210	109.060	108.910
		Iin(A)	1.768	3.366	4.786	6.365	7.909	9.504	11.121	12.768	14.470	16.176
		PF	0.970	0.988	0.993	0.996	0.999	0.999	0.999	0.997	0.994	0.992
		Pin(W)	189.17	366.18	522.92	696.04	866.72	1040.2	1214.9	1391.0	1569.3	1747.6

		THDI (%)	19.201	13.249	10.019	8.284	3.571	3.026	2.783	2.415	2.031	1.794
		Vout(V)	53.598	53.590	53.533	53.559	53.526	53.524	53.513	53.504	53.508	53.490
		Iout(A)	3.099	6.193	9.295	12.399	15.494	18.598	21.693	24.795	27.897	30.994
		Pout(W)	166.096	331.866	497.578	664.089	829.323	995.459	1160.86	1326.63	1492.73	1657.86
		Eff(%)	87.80	90.63	95.15	95.41	95.69	95.70	95.55	95.37	95.12	94.87
	Vin=180Vac/50Hz	53.5Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	180.740	180.540	180.380	180.190	180.040	179.870	179.710	179.520	179.340	179.170
		Iin(A)	1.892	3.502	5.167	6.876	8.603	10.343	12.104	13.885	15.676	17.478
		PF	0.970	0.986	0.998	0.999	0.999	0.999	0.999	0.999	0.999	0.999
		Pin(W)	331.79	623.60	930.14	1237.7	1547.6	1859.4	2174.2	2491.3	2809.2	3128.6
		THDI (%)	9.623	10.616	3.914	3.243	2.643	2.228	1.948	1.730	1.548	1.367
		Vout(V)	53.584	53.520	53.526	53.500	53.497	53.478	53.481	53.480	53.459	53.461
		Iout(A)	5.597	11.194	16.796	22.399	27.994	33.599	39.194	44.798	50.402	56.000
		Pout(W)	299.897	599.084	899.005	1198.37	1497.61	1796.80	2096.13	2395.79	2694.42	2993.81
		Eff(%)	90.39	96.07	96.65	96.82	96.77	96.63	96.41	96.17	95.91	95.69
	Vin=220Vac/50Hz	53.5Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	220.96	220.79	220.66	220.53	220.39	220.25	220.11	219.95	219.82	219.67
		Iin(A)	1.62	2.88	4.23	5.61	7.01	8.42	9.85	11.29	12.75	14.22
		PF	0.94	0.98	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
		Pin(W)	336.13	623.26	928.39	1234.70	1543.00	1853.10	2165.40	2479.90	2794.80	3111.20
		THDI (%)	12.17	9.44	3.95	3.32	2.67	2.29	2.02	1.82	1.65	1.53

		V)	60	94	11	87	87	76	69	59	50	49
		Iout(A)	5.598	11.196	16.798	22.401	27.996	33.600	39.195	44.798	50.403	56.001
		Pout(W)	299.855	598.905	898.874	1198.14	1497.43	1796.79	2095.70	2394.90	2694.03	2993.17
		Eff(%)	89.22	96.14	96.84	97.05	97.07	96.98	96.80	96.60	96.41	96.23
	Vin=85Vac /50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	85.239	85.073	84.941	84.778	84.643	84.491	84.343	84.229	84.100	83.941
		Iin(A)	1.722	3.200	4.707	6.189	7.627	9.155	10.729	12.391	14.042	15.651
		PF	0.970	0.987	0.993	0.995	0.996	0.997	0.996	0.988	0.985	0.985
		Pin(W)	142.400	268.680	396.900	522.180	643.300	770.970	900.950	1031.70	1162.70	1293.40
		THDI(%)	21.190	14.622	11.142	9.032	7.652	6.613	3.545	3.037	2.642	2.406
		Vout(V)	58.042	58.019	58.021	58.019	58.010	58.007	58.008	58.009	58.011	58.004
		Iout(A)	2.096	4.193	6.299	8.396	10.496	12.593	14.699	16.797	18.896	20.994
		Pout(W)	121.633	243.258	365.482	487.103	608.849	730.473	852.665	974.361	1096.17	1217.72
		Eff(%)	85.42	90.54	92.08	93.28	94.65	94.75	94.64	94.44	94.28	94.15
	Vin=100Vac /50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	100.310	100.150	100.000	99.864	99.719	99.564	99.414	99.267	99.133	99.000
		Iin(A)	1.730	3.206	4.720	6.138	7.653	9.175	10.731	12.331	13.994	15.650
		PF	0.969	0.987	0.993	0.995	0.997	0.999	0.998	0.996	0.991	0.988
		Pin(W)	168.120	316.790	468.520	609.980	760.500	912.430	1065.10	1219.40	1375.30	1531.30
		THDI(%)	20.490	14.277	10.916	8.836	7.445	3.526	3.046	2.748	2.353	2.067
		Vout(V)	58.096	58.011	58.017	58.012	58.012	58.002	57.999	58.007	58.009	58.001

		Iout(A)	2.497	4.996	7.496	9.997	12.496	14.996	17.498	19.997	22.497	24.998
		Pout(W)	145.059	289.812	434.896	579.946	724.937	869.808	1014.85	1159.95	1305.01	1449.92
		Eff(%)	86.28	91.48	92.82	95.08	95.32	95.33	95.28	95.12	94.89	94.69
	Vin=110Vac/50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	110.300	110.160	110.010	109.850	109.690	109.540	109.380	109.230	109.070	108.930
		Iin(A)	1.826	3.357	4.920	6.443	8.025	9.645	11.277	12.952	14.680	16.420
		PF	0.969	0.987	0.993	0.995	0.999	0.999	0.999	0.997	0.994	0.991
		Pin(W)	195.340	365.130	537.490	704.640	879.370	1055.50	1232.00	1410.90	1591.30	1772.60
		THDI(%)	19.635	13.704	10.340	8.415	3.500	3.084	2.761	2.448	2.065	1.813
		Vout(V)	58.103	58.028	58.016	58.016	58.019	58.014	58.004	58.004	57.996	57.993
		Iout(A)	2.899	5.799	8.694	11.596	14.498	17.401	20.294	23.196	26.098	28.999
		Pout(W)	168.426	336.511	504.371	672.769	841.164	1009.51	1177.15	1345.48	1513.58	1681.75
		Eff(%)	86.22	92.16	93.84	95.48	95.66	95.64	95.55	95.36	95.12	94.87
	Vin=180Vac/50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	180.750	180.580	180.390	180.220	180.050	179.890	179.710	179.540	179.370	179.190
		Iin(A)	1.863	3.515	5.172	6.878	8.602	10.340	12.090	13.859	15.640	17.434
		PF	0.969	0.985	0.998	0.999	0.999	0.999	0.999	0.999	0.999	0.999
		Pin(W)	326.470	625.500	931.030	1238.10	1547.70	1859.00	2171.70	2486.80	2803.10	3121.30
		THDI(%)	9.902	11.512	4.148	3.427	2.718	2.313	1.975	1.753	1.549	1.381
		Vout(V)	58.031	58.014	58.006	57.992	57.989	57.981	57.972	57.970	57.945	57.949
		Iout(A)	5.16	10.3	15.5	20.6	25.8	31.0	36.1	41.3	46.5	51.6

		A)	7	38	10	75	46	17	89	61	32	97
		Pout(W)	299.821	599.755	899.657	1198.97	1498.77	1798.40	2097.95	2397.70	2696.31	2995.79
		Eff(%)	91.84	95.88	96.63	96.84	96.84	96.74	96.60	96.42	96.19	95.98
	Vin=220Vac/50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	220.970	220.830	220.660	220.530	220.390	220.250	220.120	219.980	219.850	219.710
		Iin(A)	1.601	2.894	4.232	5.614	7.012	8.421	9.838	11.271	12.723	14.179
		PF	0.936	0.978	0.995	0.998	0.998	0.999	0.999	0.999	0.997	0.996
		Pin(W)	331.220	625.250	929.560	1235.30	1543.10	1852.70	2163.30	2475.90	2789.10	3103.60
		THDI(%)	14.324	10.219	4.081	3.399	2.756	2.382	2.063	1.825	1.562	1.583
		Vout(V)	58.020	58.023	58.003	57.994	57.989	57.986	57.976	57.973	57.949	57.938
		Iout(A)	5.167	10.339	15.511	20.674	25.846	31.017	36.188	41.362	46.532	51.698
		Pout(W)	299.809	599.879	899.666	1199.00	1498.79	1798.56	2098.06	2397.90	2696.47	2995.24
		Eff(%)	90.52	95.94	96.78	97.06	97.13	97.08	96.98	96.85	96.68	96.51
	Vin=230Vac/50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	231.000	230.870	230.710	230.580	230.450	230.320	230.190	230.060	229.930	229.800
		Iin(A)	1.554	2.772	4.051	5.370	6.705	8.050	9.404	10.774	12.166	13.556
		PF	0.922	0.977	0.994	0.997	0.998	0.999	0.999	0.999	0.998	0.995
		Pin(W)	331.040	625.190	929.390	1234.70	1542.30	1851.60	2161.80	2473.30	2786.70	3100.70
		THDI(%)	17.635	9.029	3.995	3.303	2.807	2.345	2.039	1.820	1.667	1.527
		Vout(V)	58.018	58.020	58.004	57.983	57.983	57.979	57.972	57.945	57.947	57.934
		Iout(A)	5.167	10.339	15.510	20.674	25.846	31.018	36.189	41.362	46.532	51.697

25 ℃		Pout(W)	299.783	599.851	899.642	1198.75	1498.63	1798.39	2097.95	2396.75	2696.40	2995.04
		Eff(%)	90.56	95.95	96.80	97.09	97.17	97.13	97.05	96.91	96.76	96.59
	Vin=275Vac/50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	220.970	220.830	220.660	220.530	220.390	220.250	220.110	219.980	219.840	219.690
		Iin(A)	1.600	2.893	4.231	5.613	7.012	8.420	9.837	11.267	12.724	14.179
		PF	0.936	0.978	0.995	0.998	0.998	0.999	0.999	0.999	0.997	0.996
		Pin(W)	331.060	625.020	929.480	1235.10	1543.00	1852.50	2163.00	2474.90	2789.10	3103.70
		THDI(%)	14.180	10.242	4.111	3.307	2.802	2.381	2.057	1.846	1.667	1.495
		Vout(V)	58.017	58.001	58.005	57.989	57.987	57.985	57.968	57.950	57.952	57.944
		Iout(A)	5.168	10.340	15.511	20.675	25.846	31.017	36.189	41.362	46.532	51.698
		Pout(W)	299.827	599.744	899.689	1198.90	1498.74	1798.51	2097.83	2396.95	2696.62	2995.59
		Eff(%)	90.57	95.96	96.80	97.07	97.13	97.09	96.99	96.85	96.68	96.52
	Vin=85Vac/50Hz	42.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	85.248	85.111	84.971	84.836	84.691	84.547	84.415	84.299	84.171	84.027
		Iin(A)	1.593	3.064	4.522	5.921	7.396	8.891	10.427	12.036	13.624	15.208
		PF	0.970	0.987	0.993	0.995	0.998	0.998	0.996	0.990	0.987	0.987
		Pin(W)	131.750	257.460	381.530	499.920	625.280	750.280	876.610	1004.50	1131.60	1260.60
		THDI(%)	20.622	14.331	10.932	8.961	4.637	4.078	3.536	3.162	2.696	2.440
		Vout(V)	42.008	42.004	42.007	41.989	41.996	41.990	41.986	41.990	41.949	41.967
		Iout(A)	2.794	5.598	8.395	11.194	13.999	16.796	19.594	22.399	25.197	27.994
		Pout(W)	117.117	235.235	352.352	470.470	587.587	705.705	822.822	940.940	1057.1057	1174.1174

		W)	386	118	650	016	899	277	690	519	.00	.82
		Eff(%)	89.10	91.32	92.43	94.02	94.02	94.00	93.85	93.63	93.41	93.20
Vin=100Vac/50Hz	42.0Vout											
	load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	
	Vin(V)	100.310	100.170	100.020	99.878	99.730	99.576	99.432	99.299	99.163	99.013	
	Iin(A)	1.673	3.227	4.696	6.234	7.792	9.368	10.967	12.620	14.309	15.990	
	PF	0.970	0.988	0.993	0.998	0.999	0.999	0.998	0.995	0.992	0.990	
	Pin(W)	162.780	319.200	466.510	621.520	776.090	931.650	1088.30	1247.20	1407.30	1568.00	
	THDI(%)	19.588	13.638	10.476	4.742	3.987	3.597	3.113	2.658	2.296	1.988	
	Vout(V)	41.993	42.011	41.997	41.999	41.999	41.991	41.966	41.971	41.944	41.936	
	Iout(A)	3.493	6.998	10.495	13.999	17.498	20.993	24.498	27.995	31.499	34.997	
	Pout(W)	146.672	293.998	440.754	587.966	734.885	881.530	1028.09	1175.00	1321.19	1467.65	
	Eff(%)	90.10	92.11	94.48	94.60	94.69	94.62	94.47	94.21	93.88	93.60	
Vin=110Vac/50Hz	42.0Vout											
	load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	
	Vin(V)	110.330	110.190	110.040	109.880	109.730	109.570	109.410	109.260	109.120	108.960	
	Iin(A)	1.733	3.321	4.868	6.445	8.062	9.696	11.352	13.051	14.781	16.548	
	PF	0.970	0.988	0.993	0.999	0.999	0.999	0.999	0.997	0.994	0.992	
	Pin(W)	185.400	361.660	532.120	707.260	883.660	1061.30	1240.50	1421.70	1604.10	1789.60	
	THDI(%)	18.900	13.129	10.112	4.281	3.801	3.242	2.782	2.400	2.037	1.796	
	Vout(V)	42.011	42.015	42.005	41.998	41.989	41.983	41.978	41.956	41.949	41.931	
	Iout(A)	4.000	7.995	11.999	15.994	19.997	24.000	27.995	32.000	35.995	39.998	
	Pout(W)	168.033	335.919	504.016	671.712	839.640	1007.58	1175.16	1342.58	1509.97	1677.19	

		Eff(%)	90.63	92.88	94.72	94.97	95.02	94.94	94.73	94.44	94.13	93.72
	Vin=180Vac/50Hz	42.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	180.740	180.600	180.460	180.310	180.170	180.020	179.870	179.720	179.570	179.420
		Iin(A)	1.630	3.094	4.554	6.053	7.571	9.108	10.670	12.241	13.831	15.438
		PF	0.963	0.984	0.997	0.999	0.999	0.999	0.999	0.999	0.999	0.999
		Pin(W)	283.780	549.830	819.750	1089.80	1362.70	1638.40	1918.00	2198.50	2481.00	2765.80
		THDI(%)	8.492	10.761	4.854	3.987	3.243	2.678	2.417	2.143	1.897	1.747
		Vout(V)	42.009	41.992	41.991	41.953	41.939	41.929	41.928	41.916	41.902	41.900
		Iout(A)	6.247	12.497	18.748	24.998	31.248	37.499	43.749	50.001	56.252	62.503
		Pout(W)	262.417	524.763	787.262	1048.75	1310.48	1572.29	1834.29	2095.81	2357.09	2618.88
		Eff(%)	92.47	95.44	96.04	96.23	96.17	95.97	95.64	95.33	95.01	94.69
	Vin=220Vac/50Hz	42.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	220.940	220.830	220.710	220.600	220.480	220.360	220.240	220.120	220.000	219.880
		Iin(A)	1.415	2.554	3.731	4.946	6.179	7.426	8.690	9.969	11.272	12.578
		PF	0.922	0.975	0.994	0.997	0.998	0.998	0.999	0.999	0.999	0.999
		Pin(W)	288.200	550.000	818.720	1087.80	1359.70	1633.80	1911.10	2189.70	2470.30	2752.50
		THDI(%)	14.883	9.338	4.659	3.997	3.363	2.901	2.632	2.351	2.086	1.934
		Vout(V)	42.013	41.998	41.989	41.950	41.938	41.925	41.910	41.900	41.896	41.889
		Iout(A)	6.247	12.497	18.748	24.999	31.248	37.499	43.749	50.001	56.252	62.503
		Pout(W)	262.449	524.846	787.232	1048.71	1310.48	1572.15	1833.51	2095.06	2356.75	2618.20
		Eff(%)	91.0	95.4	96.1	96.4	96.3	96.2	95.9	95.6	95.4	95.1

		%)	7	3	5	1	8	3	4	8	0	2
Vin=230Vac/50Hz	42.0Vout											
	load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	
	Vin(V)	230.970	230.870	230.750	230.640	230.530	230.420	230.300	230.190	230.070	229.960	
	Iin(A)	1.374	2.449	3.573	4.732	5.911	7.105	8.313	9.543	10.786	12.028	
	PF	0.908	0.973	0.993	0.996	0.997	0.997	0.998	0.996	0.995	0.994	
	Pin(W)	288.160	549.920	818.760	1087.70	1359.20	1633.10	1910.20	2188.40	2468.90	2750.70	
	THDI(%)	17.118	7.829	4.530	3.992	3.346	2.853	2.634	2.376	2.214	1.913	
	Vout(V)	42.003	41.988	41.979	41.952	41.935	41.923	41.910	41.899	41.897	41.893	
	Iout(A)	6.247	12.497	18.750	24.998	31.248	37.498	43.750	50.001	56.252	62.503	
	Pout(W)	262.382	524.734	787.092	1048.73	1310.41	1572.05	1833.55	2095.00	2356.77	2618.47	
	Eff(%)	91.05	95.42	96.13	96.42	96.41	96.26	95.99	95.73	95.46	95.19	
Vin=275Vac/50Hz	42.0Vout											
	load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	
	Vin(V)	276.220	276.130	276.040	275.950	275.860	275.770	275.680	275.580	275.490	275.390	
	Iin(A)	1.323	2.165	3.111	4.088	5.079	6.109	7.131	8.162	9.210	10.278	
	PF	0.793	0.927	0.959	0.969	0.973	0.972	0.972	0.973	0.972	0.971	
	Pin(W)	289.820	554.220	823.340	1093.00	1363.70	1636.50	1911.00	2187.90	2466.70	2747.50	
	THDI(%)	27.237	17.312	14.164	14.268	14.089	14.349	14.919	15.038	15.273	15.749	
	Vout(V)	42.005	41.988	41.971	41.959	41.974	41.948	41.923	41.917	41.895	41.892	
	Iout(A)	6.247	12.497	18.748	24.999	31.248	37.499	43.750	50.001	56.253	62.504	
	Pout(W)	262.414	524.711	786.859	1048.91	1311.61	1573.01	1834.13	2095.88	2356.68	2618.43	
	Eff(%)	90.54	94.68	95.57	95.97	96.18	96.12	95.98	95.79	95.54	95.30	

Vin=85Vac /50Hz	53.5Vout											
	load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %	
	Vin(V)	85.2 37	85.0 90	84.9 39	84.8 12	84.6 67	84.5 15	84.3 85	84.2 68	84.1 30	83.9 76	
	lin(A)	1.70 0	3.24 8	4.82 2	6.15 5	7.72 4	9.24 5	10.8 41	12.5 27	14.1 84	15.8 30	
	PF	0.96 9	0.98 7	0.99 3	0.99 5	0.99 6	0.99 8	0.99 5	0.98 8	0.98 5	0.98 5	
	Pin(W)	140. 410	272. 710	406. 530	519. 440	651. 540	779. 600	910. 000	1043 .00	1175 .80	1309 .80	
	THDI (%)	21.5 73	14.8 03	11.2 02	9.05 4	7.76 7	4.18 1	3.67 6	3.04 6	2.80 3	2.49 7	
	Vout(V)	53.5 01	53.5 02	53.4 98	53.4 51	53.4 80	53.4 65	53.4 52	53.4 40	53.4 37	53.4 35	
	Iout(A)	2.29 7	4.59 5	6.89 3	9.19 3	11.5 00	13.7 99	16.0 97	18.3 98	20.6 97	22.9 95	
	Pout(W)	122. 879	245. 817	368. 773	491. 364	614. 994	737. 766	860. 417	983. 193	1105 .97	1228 .74	
	Eff(%)	87.5 2	90.1 4	90.7 1	94.6 0	94.3 9	94.6 3	94.5 5	94.2 7	94.0 6	93.8 1	
Vin=100Vac /50Hz	53.5Vout											
	load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %	
	Vin(V)	100. 310	100. 170	100. 030	99.9 00	99.7 50	99.6 03	99.4 58	99.3 19	99.1 91	99.0 51	
	lin(A)	1.68 9	3.22 6	4.70 8	6.09 3	7.59 9	9.12 4	10.6 76	12.2 77	13.9 32	15.5 82	
	PF	0.96 7	0.98 6	0.99 2	0.99 5	0.99 9	0.99 9	0.99 8	0.99 6	0.99 2	0.98 9	
	Pin(W)	163. 950	318. 780	467. 320	605. 750	756. 900	907. 630	1060 .10	1214 .50	1370 .40	1526 .90	
	THDI (%)	20.9 98	14.5 61	11.1 08	8.93 1	4.35 8	3.75 4	3.24 6	2.96 8	2.50 9	2.23 4	
	Vout(V)	53.5 18	53.5 00	53.4 87	53.4 50	53.4 78	53.4 58	53.4 47	53.4 41	53.4 34	53.4 35	
	Iout(A)	2.69 7	5.39 7	8.09 8	10.8 00	13.4 94	16.1 95	18.8 98	21.5 97	24.2 98	26.9 99	
	Pout(W)	144. 361	288. 749	433. 134	577. 270	721. 624	865. 729	1010 .05	1154 .16	1298 .32	1442 .67	
	Eff(%)	88.0 5	90.5 8	92.6 9	95.3 0	95.3 4	95.3 8	95.2 8	95.0 3	94.7 4	94.4 8	
Vin=110Vac	53.5Vout											

	c/50Hz	load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %
		Vin(V)	110.340	110.180	110.050	109.900	109.740	109.590	109.440	109.290	109.150	109.000
		Iin(A)	1.751	3.349	4.775	6.351	7.894	9.486	11.101	12.756	14.456	16.166
		PF	0.968	0.987	0.993	0.995	0.999	0.999	0.999	0.997	0.994	0.992
		Pin(W)	186.950	364.100	521.680	694.560	865.260	1038.60	1213.40	1390.50	1568.90	1748.00
		THDI (%)	20.219	14.051	10.644	8.802	3.916	3.331	3.053	2.688	2.290	1.989
		Vout(V)	53.516	53.506	53.463	53.485	53.472	53.452	53.441	53.441	53.422	53.426
		Iout(A)	3.100	6.195	9.297	12.400	15.495	18.599	21.694	24.796	27.898	30.994
		Pout(W)	165.873	331.446	497.041	663.190	828.562	994.179	1159.34	1325.10	1490.36	1655.88
		Eff(%)	88.73	91.03	95.28	95.48	95.76	95.72	95.55	95.30	94.99	94.73
	Vin=180Va c/50Hz	53.5Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %
		Vin(V)	180.720	180.570	180.400	180.240	180.070	179.910	179.740	179.570	179.390	179.220
		Iin(A)	1.882	3.495	5.152	6.863	8.588	10.330	12.089	13.873	15.667	17.478
		PF	0.969	0.985	0.998	0.999	0.999	0.999	0.999	0.999	0.999	0.999
		Pin(W)	329.460	621.870	927.420	1235.40	1545.20	1857.20	2171.70	2489.70	2808.30	3129.40
		THDI (%)	11.328	11.555	4.643	3.858	3.172	2.689	2.489	2.082	1.907	1.735
		Vout(V)	53.516	53.459	53.454	53.450	53.438	53.422	53.405	53.409	53.390	53.387
		Iout(A)	5.599	11.194	16.797	22.400	27.995	33.600	39.195	44.799	50.402	55.999
		Pout(W)	299.616	598.446	897.895	1197.28	1496.02	1794.99	2093.19	2392.66	2690.98	2989.62
		Eff(%)	90.94	96.23	96.82	96.91	96.82	96.65	96.39	96.10	95.82	95.53
	Vin=220Va c/50Hz	53.5Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100

												%
		Vin(V)	220.930	220.810	220.670	220.540	220.400	220.270	220.130	219.990	219.860	219.720
		Iin(A)	1.602	2.878	4.216	5.603	7.001	8.412	9.839	11.281	12.741	14.209
		PF	0.943	0.978	0.995	0.998	0.998	0.999	0.999	0.998	0.997	0.996
		Pin(W)	333.870	621.490	925.890	1232.50	1540.50	1850.60	2163.20	2477.70	2793.20	3110.30
		THDI(%)	10.487	10.639	4.831	4.106	3.389	2.971	2.600	2.345	2.108	1.926
		Vout(V)	53.508	53.447	53.442	53.438	53.426	53.415	53.411	53.401	53.383	53.379
		Iout(A)	5.600	11.195	16.799	22.401	27.996	33.599	39.195	44.799	50.402	56.000
		Pout(W)	299.632	598.361	897.768	1197.07	1495.73	1794.69	2093.44	2392.31	2690.62	2989.25
		Eff(%)	89.75	96.28	96.96	97.13	97.09	96.98	96.78	96.55	96.33	96.11
	Vin=230Vac/50Hz	53.5Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	230.960	230.840	230.710	230.590	230.460	230.330	230.200	230.070	229.940	229.810
		Iin(A)	1.557	2.757	4.036	5.359	6.695	8.043	9.406	10.785	12.182	13.586
		PF	0.930	0.976	0.994	0.997	0.998	0.998	0.998	0.998	0.996	0.995
		Pin(W)	334.370	621.460	925.850	1232.00	1539.80	1849.40	2161.60	2475.90	2791.00	3107.50
		THDI(%)	14.119	9.548	4.784	4.006	3.384	2.894	2.582	2.389	2.187	1.949
		Vout(V)	53.501	53.450	53.442	53.427	53.416	53.408	53.413	53.404	53.384	53.382
		Iout(A)	5.600	11.196	16.799	22.402	27.996	33.600	39.196	44.799	50.403	56.001
		Pout(W)	299.583	598.407	897.747	1196.86	1495.46	1794.52	2093.57	2392.45	2690.72	2989.41
		Eff(%)	89.60	96.29	96.97	97.15	97.12	97.03	96.85	96.63	96.41	96.20
	Vin=275Vac/50Hz	53.5Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%

		Vin(V)	276.210	276.110	276.010	275.910	275.800	275.700	275.590	275.480	275.380	275.280
		Iin(A)	1.449	2.411	3.488	4.595	5.740	6.894	8.051	9.223	10.414	11.642
		PF	0.822	0.940	0.964	0.972	0.972	0.972	0.973	0.972	0.971	0.967
		Pin(W)	329.110	625.460	927.740	1232.40	1539.50	1848.00	2158.50	2470.00	2783.90	3098.90
		THDI(%)	26.086	16.061	14.901	14.337	14.481	14.624	15.417	15.514	16.195	19.089
		Vout(V)	53.519	53.498	53.469	53.442	53.428	53.409	53.416	53.397	53.391	53.384
		Iout(A)	5.599	11.196	16.799	22.402	27.996	33.601	39.195	44.800	50.402	56.000
		Pout(W)	299.673	598.959	898.208	1197.19	1495.78	1794.59	2093.65	2392.20	2691.03	2989.51
		Eff(%)	91.06	95.76	96.82	97.14	97.16	97.11	97.00	96.85	96.66	96.47
	Vin=85Vac /50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	85.238	85.099	84.957	84.818	84.681	84.535	84.397	84.285	84.163	84.013
		Iin(A)	1.714	3.185	4.686	6.171	7.614	9.146	10.723	12.384	14.036	15.652
		PF	0.968	0.986	0.992	0.995	0.996	0.996	0.995	0.988	0.985	0.985
		Pin(W)	141.440	267.200	394.990	520.690	642.230	770.480	900.790	1031.70	1163.30	1294.80
		THDI(%)	22.069	15.313	11.673	9.467	8.036	6.961	3.818	3.252	2.844	2.575
		Vout(V)	57.984	57.976	57.965	57.970	57.963	57.968	57.958	57.945	57.953	57.945
		Iout(A)	2.097	4.194	6.299	8.397	10.496	12.594	14.700	16.798	18.897	20.994
		Pout(W)	121.574	243.151	365.123	486.758	608.380	730.024	851.987	973.365	1095.12	1216.52
		Eff(%)	85.96	91.00	92.44	93.48	94.73	94.75	94.58	94.35	94.14	93.95
	Vin=100Vac /50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	100.	100.	100.	99.8	99.7	99.6	99.4	99.3	99.1	99.0

		V)	310	170	030	98	54	01	57	23	99	61
		Iin(A)	1.71 7	3.19 1	4.69 8	6.12 6	7.64 1	9.16 3	10.7 18	12.3 17	13.9 84	15.6 42
		PF	0.96 6	0.98 6	0.99 2	0.99 5	0.99 6	0.99 9	0.99 8	0.99 6	0.99 1	0.98 9
		Pin(W)	166. 440	315. 090	466. 150	608. 780	759. 330	911. 510	1064 .20	1218 .60	1375 .20	1531 .70
		THDI (%)	21.4 90	15.0 33	11.4 87	9.32 7	7.85 2	3.81 8	3.34 4	2.90 9	2.63 8	2.26 4
		Vout(V)	58.0 41	57.9 73	57.9 59	57.9 75	57.9 64	57.9 61	57.9 58	57.9 45	57.9 52	57.9 47
		Iout(A)	2.49 7	4.99 5	7.49 7	9.99 6	12.4 97	14.9 98	17.4 98	19.9 96	22.4 97	24.9 98
		Pout(W)	144. 926	289. 598	434. 510	579. 535	724. 362	869. 273	1014 .17	1158 .68	1303 .72	1448 .60
		Eff(%)	87.0 7	91.9 1	93.2 1	95.2 0	95.4 0	95.3 7	95.3 0	95.0 8	94.8 0	94.5 7
	Vin=110Vac/50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %
		Vin(V)	110. 330	110. 180	110. 030	109. 890	109. 730	109. 580	109. 420	109. 270	109. 140	108. 990
		Iin(A)	1.79 8	3.34 0	4.90 2	6.42 8	8.00 9	9.62 6	11.2 64	12.9 39	14.6 65	16.4 06
		PF	0.96 7	0.98 6	0.99 2	0.99 5	0.99 9	0.99 9	0.99 9	0.99 7	0.99 4	0.99 1
		Pin(W)	191. 890	362. 870	535. 310	702. 930	877. 750	1053 .70	1231 .00	1410 .00	1590 .60	1772 .30
		THDI (%)	20.7 28	14.4 53	10.9 48	8.90 2	4.01 9	3.38 4	3.05 5	2.67 2	2.32 8	1.99 6
		Vout(V)	58.0 45	57.9 63	57.9 53	57.9 59	57.9 68	57.9 48	57.9 58	57.9 54	57.9 44	57.9 39
		Iout(A)	2.89 9	5.80 0	8.69 5	11.5 97	14.4 99	17.4 02	20.2 95	23.1 97	26.0 99	29.0 00
		Pout(W)	168. 272	336. 177	503. 879	672. 151	840. 491	1008 .43	1176 .28	1344 .34	1512 .30	1680 .24
		Eff(%)	87.6 9	92.6 4	94.1 3	95.6 2	95.7 6	95.7 0	95.5 6	95.3 4	95.0 8	94.8 1
	Vin=180Vac/50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %
		Vin(V)	180. 720	180. 560	180. 400	180. 230	180. 070	179. 900	179. 730	179. 570	179. 400	179. 220

		Iin(A)	1.85 4	3.50 9	5.16 2	6.86 5	8.58 8	10.3 25	12.0 78	13.8 49	15.6 34	17.4 33
		PF	0.96 8	0.98 4	0.99 8	0.99 9	0.99 9	0.99 9	0.99 9	0.99 9	0.99 9	0.99 9
		Pin(W)	324. 200	623. 610	928. 980	1235 .70	1545 .00	1856 .30	2169 .60	2485 .40	2802 .50	3121 .60
		THDI (%)	11.6 42	12.5 66	4.86 5	3.94 7	3.23 4	2.71 9	2.35 9	2.08 9	1.88 5	1.71 9
		Vout(V)	57.9 76	57.9 67	57.9 63	57.9 48	57.9 35	57.9 27	57.9 17	57.9 15	57.9 03	57.8 88
		Iout(A)	5.16 8	10.3 40	15.5 11	20.6 75	25.8 47	31.0 18	36.1 89	41.3 63	46.5 33	51.6 97
		Pout(W)	299. 603	599. 359	899. 078	1198 .07	1497 .45	1796 .79	2095 .99	2395 .52	2694 .43	2992 .64
		Eff(%)	92.4 1	96.1 1	96.7 8	96.9 6	96.9 2	96.7 9	96.6 1	96.3 8	96.1 4	95.8 7
	Vin=220Vac/50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %
		Vin(V)	220. 930	220. 800	220. 660	220. 530	220. 400	220. 260	220. 130	219. 990	219. 860	219. 720
		Iin(A)	1.58 6	2.88 8	4.22 3	5.60 4	7.00 2	8.40 9	9.82 7	11.2 63	12.7 17	14.1 77
		PF	0.94 0	0.97 7	0.99 5	0.99 7	0.99 8	0.99 9	0.99 9	0.99 8	0.99 7	0.99 6
		Pin(W)	329. 420	623. 250	927. 350	1232 .70	1540 .50	1850 .00	2160 .80	2474 .00	2788 .00	3103 .30
		THDI (%)	12.3 27	11.4 75	5.04 0	4.21 1	3.49 2	2.97 4	2.55 8	2.32 7	2.05 8	1.94 8
		Vout(V)	57.9 58	57.9 53	57.9 43	57.9 34	57.9 26	57.9 19	57.9 11	57.9 15	57.9 01	57.8 90
		Iout(A)	5.16 9	10.3 40	15.5 12	20.6 75	25.8 47	31.0 18	36.1 89	41.3 64	46.5 33	51.6 98
		Pout(W)	299. 611	599. 237	898. 799	1197 .80	1497 .22	1796 .54	2095 .74	2395 .57	2694 .29	2992 .77
		Eff(%)	90.9 5	96.1 5	96.9 2	97.1 7	97.1 9	97.1 1	96.9 9	96.8 3	96.6 4	96.4 4
	Vin=230Vac/50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %
		Vin(V)	230. 960	230. 840	230. 710	230. 580	230. 450	230. 330	230. 190	230. 070	229. 940	229. 810
		Iin(A)	1.54	2.76	4.04	5.36	6.69	8.04	9.39	10.7	12.1	13.5

			3	7	3	2	6	0	4	68	66	52
		PF	0.925	0.976	0.994	0.997	0.998	0.998	0.999	0.998	0.996	0.995
		Pin(W)	329.800	623.410	927.390	1232.50	1540.00	1849.20	2159.40	2471.90	2786.10	3100.10
		THDI(%)	16.421	10.327	4.944	4.205	3.481	2.950	2.653	2.320	2.108	1.874
		Vout(V)	57.966	57.965	57.952	57.942	57.930	57.923	57.910	57.912	57.905	57.886
		Iout(A)	5.168	10.340	15.512	20.675	25.847	31.018	36.190	41.363	46.534	51.698
		Pout(W)	299.591	599.354	898.932	1197.97	1497.32	1796.68	2095.74	2395.42	2694.55	2992.57
		Eff(%)	90.84	96.14	96.93	97.20	97.23	97.16	97.05	96.91	96.71	96.53
	Vin=275Vac/50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	276.210	276.110	276.010	275.900	275.790	275.690	275.590	275.490	275.380	275.280
		Iin(A)	1.446	2.406	3.485	4.593	5.736	6.888	8.039	9.208	10.394	11.611
		PF	0.822	0.939	0.964	0.972	0.972	0.972	0.973	0.972	0.971	0.967
		Pin(W)	328.380	624.020	926.910	1231.40	1538.10	1846.20	2155.20	2466.00	2778.40	3091.20
		THDI(%)	26.863	16.489	14.923	14.062	14.624	14.844	15.375	15.173	16.106	17.726
		Vout(V)	57.960	57.958	57.937	57.932	57.922	57.916	57.908	57.898	57.892	57.882
		Iout(A)	5.169	10.340	15.511	20.675	25.847	31.018	36.190	41.363	46.533	51.698
		Pout(W)	299.583	599.287	898.666	1197.78	1497.11	1796.45	2095.68	2394.83	2693.91	2992.35
		Eff(%)	91.23	96.04	96.95	97.27	97.34	97.31	97.24	97.11	96.96	96.80
	55℃	42.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	85.279	85.148	85.012	84.884	84.749	84.611	84.485	84.373	84.245	84.103
		Iin(A)	1.651	3.132	4.602	5.997	7.468	8.958	10.492	12.096	13.685	15.258

[illegible]

			9	7	3	8	9	9	9	7	4	2
		Pin(W)	188.550	366.370	538.510	714.060	889.920	1067.10	1245.60	1426.60	1609.10	1794.90
		THDI(%)	19.826	13.695	10.508	4.618	3.856	3.470	2.981	2.583	2.232	2.052
		Vout(V)	41.974	41.964	41.955	41.952	41.943	41.936	41.914	41.908	41.889	41.883
		Iout(A)	3.999	7.993	11.997	15.993	19.997	23.999	27.994	31.999	35.995	39.999
		Pout(W)	167.850	335.438	503.336	670.950	838.713	1006.41	1173.36	1341.02	1507.79	1675.28
		Eff(%)	89.02	91.56	93.47	93.96	94.25	94.31	94.20	94.00	93.70	93.34
	Vin=180Vac/50Hz	42.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	180.800	180.670	180.530	180.390	180.250	180.100	179.960	179.810	179.660	179.510
		Iin(A)	1.631	3.108	4.568	6.073	7.599	9.147	10.713	12.287	13.880	15.492
		PF	0.963	0.982	0.997	0.998	0.999	0.999	0.999	0.999	0.999	0.999
		Pin(W)	284.040	551.450	822.270	1093.70	1368.20	1646.10	1926.60	2207.60	2490.70	2777.20
		THDI(%)	9.423	12.501	5.346	4.482	3.635	3.096	2.821	2.510	2.269	2.096
		Vout(V)	41.962	41.952	41.949	41.925	41.906	41.894	41.880	41.863	41.853	41.855
		Iout(A)	6.246	12.496	18.747	24.997	31.248	37.500	43.750	50.001	56.253	62.504
		Pout(W)	262.083	524.228	786.396	1048.02	1309.46	1571.00	1832.24	2093.18	2354.38	2616.05
		Eff(%)	92.27	95.06	95.64	95.82	95.71	95.44	95.10	94.82	94.53	94.20
	Vin=220Vac/50Hz	42.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	221.010	220.900	220.790	220.670	220.560	220.440	220.320	220.200	220.090	219.970
		Iin(A)	1.414	2.561	3.742	4.962	6.201	7.456	8.726	10.005	11.305	12.613
		PF	0.925	0.975	0.994	0.997	0.998	0.998	0.998	0.998	0.996	0.995

		Pin(W)	289.020	551.400	821.460	1091.70	1364.90	1640.80	1919.40	2198.30	2478.60	2761.80
		THDI(%)	13.481	10.236	5.332	4.580	3.783	3.294	3.013	2.751	2.471	2.261
		Vout(V)	41.977	41.944	41.948	41.922	41.904	41.892	41.879	41.866	41.851	41.851
		Iout(A)	6.245	12.496	18.747	24.998	31.247	37.499	43.750	50.001	56.253	62.504
		Pout(W)	262.161	524.115	786.416	1047.96	1309.38	1570.91	1832.19	2093.35	2354.24	2615.84
		Eff(%)	90.71	95.05	95.73	95.99	95.93	95.74	95.46	95.23	94.98	94.72
	Vin=230Vac/50Hz	42.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	231.050	230.940	230.830	230.720	230.610	230.500	230.390	230.280	230.170	230.050
		Iin(A)	1.373	2.453	3.583	4.748	5.932	7.133	8.346	9.573	10.812	12.059
		PF	0.911	0.974	0.993	0.996	0.997	0.997	0.998	0.996	0.995	0.994
		Pin(W)	289.040	551.560	821.260	1091.50	1364.50	1640.10	1918.30	2196.50	2476.40	2758.80
		THDI(%)	15.455	8.270	5.153	4.411	3.711	3.302	3.035	2.734	2.480	2.297
		Vout(V)	41.975	41.959	41.948	41.921	41.908	41.891	41.876	41.861	41.846	41.845
		Iout(A)	6.246	12.496	18.747	24.997	31.247	37.499	43.750	50.002	56.253	62.504
		Pout(W)	262.171	524.336	786.390	1047.91	1309.53	1570.87	1832.10	2093.13	2353.95	2615.48
		Eff(%)	90.70	95.06	95.75	96.01	95.97	95.78	95.51	95.29	95.06	94.81
	Vin=275Vac/50Hz	42.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	276.300	276.220	276.130	276.040	275.950	275.860	275.770	275.680	275.590	275.500
		Iin(A)	1.324	2.165	3.122	4.101	5.093	6.126	7.149	8.181	9.229	10.292
		PF	0.794	0.929	0.958	0.969	0.973	0.972	0.973	0.973	0.973	0.972
		Pin(W)	290.	555.	826.	1096	1368	1642	1918	2195	2474	2755

		W)	490	480	000	.70	.20	.80	.10	.40	.30	.10
		THDI (%)	27.3 43	17.2 09	15.2 23	15.0 55	14.1 75	14.6 66	14.6 86	14.5 77	14.9 25	15.4 11
		Vout(V)	41.9 70	41.9 50	41.9 48	41.9 30	41.9 09	41.9 00	41.8 77	41.8 71	41.8 63	41.8 43
		Iout(A)	6.24 6	12.4 97	18.7 47	24.9 99	31.2 48	37.4 99	43.7 51	50.0 02	56.2 53	62.5 04
		Pout(W)	262. 139	524. 238	786. 414	1048 .19	1309 .56	1571 .24	1832 .17	2093 .62	2354 .91	2615 .34
		Eff(%)	90.2 4	94.3 8	95.2 1	95.5 8	95.7 1	95.6 4	95.5 2	95.3 6	95.1 8	94.9 3
	Vin=85Vac /50Hz	53.5Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %
		Vin(V)	85.2 62	85.1 16	84.9 66	84.8 42	84.6 96	84.5 66	84.4 38	84.3 20	84.1 78	84.0 30
		Iin(A)	1.73 6	3.29 8	4.89 2	6.23 6	7.82 3	9.33 8	10.9 41	12.6 23	14.2 80	15.9 27
		PF	0.96 9	0.98 6	0.99 2	0.99 5	0.99 6	0.99 8	0.99 4	0.98 8	0.98 5	0.98 5
		Pin(W)	143. 370	276. 900	412. 550	526. 450	660. 020	787. 730	918. 480	1051 .30	1184 .50	1318 .50
		THDI (%)	21.9 84	15.1 48	11.4 38	9.28 6	7.99 1	4.36 4	3.80 5	3.25 6	2.90 2	2.69 3
		Vout(V)	53.4 81	53.4 78	53.4 78	53.4 21	53.4 62	53.4 34	53.4 29	53.4 15	53.4 19	53.3 94
		Iout(A)	2.29 6	4.59 4	6.89 3	9.19 2	11.4 99	13.7 99	16.0 97	18.3 98	20.6 95	22.9 95
		Pout(W)	122. 780	245. 684	368. 649	491. 043	614. 773	737. 318	860. 074	982. 752	1105 .53	1227 .79
		Eff(%)	85.6 4	88.7 3	89.3 6	93.2 7	93.4 5	93.6 0	93.6 4	93.4 8	93.3 3	93.1 2
	Vin=100Vac /50Hz	53.5Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %
		Vin(V)	100. 340	100. 200	100. 050	99.9 34	99.7 86	99.6 45	99.5 04	99.3 68	99.2 43	99.1 04
		Iin(A)	1.71 5	3.26 1	4.80 0	6.15 4	7.67 1	9.20 1	10.7 53	12.3 58	14.0 14	15.6 61
		PF	0.96 7	0.98 6	0.99 2	0.99 5	0.99 8	0.99 9	0.99 8	0.99 6	0.99 1	0.98 9
		Pin(W)	166. 320	322. 050	476. 480	611. 830	764. 220	915. 590	1068 .00	1222 .60	1378 .90	1535 .30

		THDI (%)	21.5 39	15.0 37	11.4 22	9.21 2	4.58 2	3.92 1	3.45 5	3.10 4	2.69 3	2.38 0
		Vout(V)	53.4 99	53.4 81	53.4 89	53.4 27	53.4 50	53.4 25	53.4 13	53.4 08	53.4 00	53.3 98
		Iout(A)	2.69 7	5.39 7	8.09 8	10.7 99	13.4 94	16.1 94	18.8 96	21.5 97	24.2 97	26.9 98
		Pout(W)	144. 314	288. 644	433. 166	576. 980	721. 249	865. 131	1009 .28	1153 .43	1297 .45	1441 .64
		Eff(%)	86.7 7	89.6 3	90.9 1	94.3 0	94.3 8	94.4 9	94.5 0	94.3 4	94.0 9	93.9 0
	Vin=110Vac/50Hz	53.5Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	110. 370	110. 220	110. 090	109. 940	109. 790	109. 640	109. 490	109. 350	109. 210	109. 060
		Iin(A)	1.77 2	3.37 8	4.81 7	6.40 2	7.95 4	9.55 7	11.1 72	12.8 25	14.5 27	16.2 41
		PF	0.96 7	0.98 6	0.99 2	0.99 5	0.99 9	0.99 9	0.99 9	0.99 7	0.99 4	0.99 2
		Pin(W)	189. 080	367. 140	526. 210	700. 320	872. 160	1046 .70	1221 .60	1398 .40	1577 .20	1756 .90
		THDI (%)	20.8 98	14.5 54	11.0 33	9.12 2	4.22 6	3.60 1	3.26 9	2.87 4	2.45 6	2.17 8
		Vout(V)	53.4 96	53.4 88	53.4 28	53.4 45	53.4 40	53.4 23	53.4 16	53.3 95	53.3 93	53.3 93
		Iout(A)	3.10 0	6.19 4	9.29 6	12.4 00	15.4 95	18.5 99	21.6 93	24.7 96	27.8 99	30.9 94
		Pout(W)	165. 816	331. 299	496. 683	662. 697	828. 040	993. 582	1158 .78	1323 .98	1489 .60	1654 .85
		Eff(%)	87.7 0	90.2 4	94.3 9	94.6 3	94.9 4	94.9 3	94.8 6	94.6 8	94.4 5	94.1 9
	Vin=180Vac/50Hz	53.5Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	180. 770	180. 630	180. 470	180. 300	180. 140	179. 980	179. 820	179. 650	179. 470	179. 290
		Iin(A)	1.88 2	3.50 2	5.16 0	6.87 5	8.60 5	10.3 56	12.1 23	13.9 17	15.7 25	17.5 62
		PF	0.96 7	0.98 4	0.99 7	0.99 9	0.99 9	0.99 9	0.99 9	0.99 9	0.99 9	0.99 9
		Pin(W)	328. 890	622. 650	928. 910	1237 .80	1548 .70	1862 .60	2178 .70	2498 .50	2819 .70	3145 .10
		THDI	12.9	12.3	5.28	4.30	3.53	2.99	2.65	2.41	2.22	2.27

		(%)	49	58	2	4	1	3	9	5	1	9
		Vout(V)	53.486	53.428	53.417	53.409	53.392	53.384	53.367	53.368	53.357	53.353
		Iout(A)	5.598	11.194	16.797	22.400	27.995	33.599	39.194	44.799	50.402	56.000
		Pout(W)	299.407	598.076	897.239	1196.35	1494.71	1793.67	2091.69	2390.81	2689.31	2987.79
		Eff(%)	91.04	96.05	96.59	96.65	96.51	96.30	96.01	95.69	95.38	95.00
	Vin=220Vac/50Hz	53.5Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	220.990	220.860	220.730	220.600	220.470	220.340	220.200	220.070	219.940	219.800
		Iin(A)	1.596	2.883	4.223	5.612	7.016	8.433	9.863	11.313	12.784	14.252
		PF	0.945	0.977	0.995	0.997	0.998	0.999	0.999	0.998	0.997	0.996
		Pin(W)	333.270	622.350	927.590	1234.80	1544.20	1855.50	2168.90	2485.60	2803.20	3120.80
		THDI(%)	9.080	11.541	5.475	4.524	3.833	3.268	2.903	2.665	2.457	2.244
		Vout(V)	53.471	53.417	53.412	53.397	53.401	53.382	53.366	53.367	53.355	53.347
		Iout(A)	5.598	11.194	16.797	22.401	27.996	33.600	39.195	44.800	50.402	56.000
		Pout(W)	299.359	597.942	897.181	1196.15	1495.02	1793.65	2091.70	2390.80	2689.21	2987.42
		Eff(%)	89.83	96.08	96.72	96.87	96.82	96.67	96.44	96.19	95.93	95.73
	Vin=230Vac/50Hz	53.5Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	231.020	230.910	230.780	230.650	230.530	230.400	230.280	230.150	230.020	229.900
		Iin(A)	1.552	2.762	4.043	5.369	6.708	8.063	9.429	10.817	12.225	13.626
		PF	0.932	0.976	0.994	0.997	0.998	0.998	0.998	0.998	0.996	0.995
		Pin(W)	334.300	622.450	927.520	1234.50	1543.30	1854.50	2167.40	2483.70	2801.10	3117.80
		THDI(%)	12.818	10.417	5.252	4.498	3.720	3.211	2.917	2.670	2.439	2.212

[illegible]



		V)	58	21	29	18	23	15	15	04	01	07
		Iout(A)	2.097	4.193	6.298	8.395	10.495	12.594	14.698	16.797	18.896	20.994
		Pout(W)	121.516	242.838	364.841	486.230	607.892	729.373	851.245	972.633	1094.11	1215.69
		Eff(%)	83.09	89.41	91.11	92.20	93.44	93.68	93.64	93.49	93.38	93.22
	Vin=100Vac/50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	100.350	100.210	100.080	99.950	99.810	99.661	99.521	99.388	99.268	99.136
		Iin(A)	1.751	3.233	4.747	6.188	7.716	9.238	10.794	12.402	14.063	15.716
		PF	0.966	0.985	0.992	0.994	0.996	0.999	0.998	0.996	0.991	0.988
		Pin(W)	169.700	319.140	471.000	615.070	767.010	919.390	1072.20	1227.20	1383.50	1540.10
		THDI(%)	22.094	15.500	11.837	9.617	8.114	4.031	3.560	3.171	2.743	2.429
		Vout(V)	57.998	57.925	57.922	57.926	57.927	57.914	57.906	57.908	57.899	57.893
		Iout(A)	2.497	4.996	7.496	9.996	12.495	14.997	17.497	19.996	22.496	24.998
		Pout(W)	144.848	289.366	434.183	579.029	723.831	868.513	1013.21	1157.95	1302.51	1447.18
		Eff(%)	85.36	90.67	92.18	94.14	94.37	94.47	94.50	94.36	94.15	93.97
	Vin=110Vac/50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	110.370	110.230	110.090	109.950	109.790	109.640	109.490	109.350	109.210	109.070
		Iin(A)	1.828	3.372	4.946	6.484	8.072	9.696	11.329	13.009	14.738	16.397
		PF	0.966	0.985	0.992	0.995	0.999	0.999	0.999	0.997	0.993	0.991
		Pin(W)	194.880	366.320	540.140	709.190	885.080	1061.80	1238.70	1418.10	1599.10	1771.20
		THDI(%)	21.437	14.976	11.372	9.240	4.255	3.644	3.293	2.896	2.511	2.254
		Vout(V)	58.004	57.928	57.926	57.929	57.920	57.908	57.900	57.894	57.886	57.517



		lout(A)	2.89 8	5.79 9	8.69 4	11.5 96	14.4 99	17.4 02	20.2 94	23.1 96	26.0 99	29.0 00
		Pout(W)	168. 086	335. 926	503. 584	671. 754	839. 768	1007. 72	1175. 03	1342. 92	1510. 74	1667. 98
		Eff(%)	86.2 5	91.7 0	93.2 3	94.7 2	94.8 8	94.9 1	94.8 6	94.7 0	94.4 7	94.1 7
	Vin=180Vac/50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %
		Vin(V)	180. 780	180. 630	180. 470	180. 310	180. 150	179. 990	179. 820	179. 660	179. 490	179. 320
		Iin(A)	1.85 6	3.51 6	5.17 1	6.87 8	8.60 7	10.3 53	12.1 14	13.8 95	15.6 90	17.5 13
		PF	0.96 6	0.98 3	0.99 7	0.99 9	0.99 9	0.99 9	0.99 9	0.99 9	0.99 9	0.99 9
		Pin(W)	324. 110	624. 530	930. 760	1238 .30	1548 .90	1862 .00	2177 .10	2494 .60	2813 .80	3137 .20
		THDI(%)	13.3 16	13.3 49	5.45 7	4.39 5	3.60 4	3.06 5	2.70 2	2.49 2	2.20 7	2.24 3
		Vout(V)	57.9 19	57.9 12	57.9 13	57.8 95	57.8 87	57.8 74	57.8 74	57.8 74	57.8 52	57.8 43
		lout(A)	5.16 7	10.3 38	15.5 11	20.6 74	25.8 46	31.0 16	36.1 89	41.3 62	46.5 33	51.6 97
		Pout(W)	299. 254	598. 715	898. 268	1196 .95	1496 .17	1795 .03	2094 .41	2393 .82	2692 .02	2990 .32
		Eff(%)	92.3 3	95.8 7	96.5 1	96.6 6	96.6 0	96.4 0	96.2 0	95.9 6	95.6 7	95.3 2
	Vin=220Vac/50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100 %
		Vin(V)	221. 000	220. 870	220. 740	220. 610	220. 480	220. 350	220. 220	220. 090	219. 960	219. 820
		Iin(A)	1.58 3	2.89 6	4.23 1	5.61 5	7.01 8	8.43 1	9.85 6	11.2 98	12.7 58	14.2 19
		PF	0.94 2	0.97 6	0.99 5	0.99 7	0.99 8	0.99 9	0.99 9	0.99 8	0.99 7	0.99 6
		Pin(W)	329. 610	624. 460	929. 250	1235 .50	1544 .50	1855 .20	2167 .90	2482 .50	2798 .00	3114 .00
		THDI(%)	10.6 57	12.5 70	5.68 0	4.70 5	3.92 2	3.38 0	2.95 5	2.67 2	2.42 9	2.23 7
		Vout(V)	57.9 37	57.9 26	57.9 06	57.8 89	57.8 84	57.8 75	57.8 75	57.8 73	57.8 53	57.8 47
		lout(A)	5.16	10.3	15.5	20.6	25.8	31.0	36.1	41.3	46.5	51.6



		A)	7	39	10	74	47	17	89	63	33	98
		Pout(W)	299.389	598.892	898.100	1196.81	1496.12	1795.11	2094.43	2393.82	2692.08	2990.56
		Eff(%)	90.83	95.91	96.65	96.87	96.87	96.76	96.61	96.43	96.21	96.04
	Vin=230Vac/50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	231.030	230.910	230.790	230.660	230.540	230.410	230.290	230.160	230.040	229.910
		Iin(A)	1.540	2.773	4.051	5.373	6.712	8.060	9.421	10.802	12.199	13.591
		PF	0.929	0.975	0.994	0.997	0.998	0.998	0.999	0.998	0.996	0.995
		Pin(W)	330.530	624.590	929.380	1235.30	1544.00	1854.30	2166.30	2480.40	2795.40	3110.50
		THDI(%)	14.485	11.254	5.493	4.654	3.900	3.345	2.969	2.675	2.465	2.264
		Vout(V)	57.922	57.921	57.915	57.897	57.888	57.877	57.873	57.870	57.857	57.844
		Iout(A)	5.167	10.339	15.510	20.674	25.846	31.017	36.189	41.363	46.533	51.697
		Pout(W)	299.288	598.830	898.266	1196.98	1496.19	1795.16	2094.35	2393.71	2692.23	2990.38
		Eff(%)	90.55	95.88	96.65	96.90	96.90	96.81	96.68	96.51	96.31	96.14
	Vin=275Vac/50Hz	58.0Vout										
		load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
		Vin(V)	276.290	276.190	276.090	275.990	275.890	275.790	275.700	275.600	275.490	275.390
		Iin(A)	1.446	2.408	3.493	4.602	5.748	6.902	8.056	9.228	10.415	11.637
		PF	0.824	0.940	0.963	0.972	0.972	0.973	0.973	0.973	0.972	0.968
		Pin(W)	329.370	625.190	929.110	1234.50	1542.20	1851.50	2162.10	2474.40	2787.80	3101.10
		THDI(%)	26.374	17.128	15.567	14.023	13.984	14.434	14.704	15.112	15.628	18.023
		Vout(V)	57.937	57.929	57.918	57.905	57.891	57.883	57.879	57.871	57.860	57.849
		Iout(A)	5.167	10.339	15.510	20.674	25.846	31.018	36.190	41.362	46.533	51.698



		Pout(W)	299. 352	598. 922	898. 314	1197 .13	1496 .26	1795 .39	2094 .62	2393 .70	2692 .40	2990 .66
		Eff(%)	90.8 9	95.8 0	96.6 9	96.9 7	97.0 2	96.9 7	96.8 8	96.7 4	96.5 8	96.4 4


#1

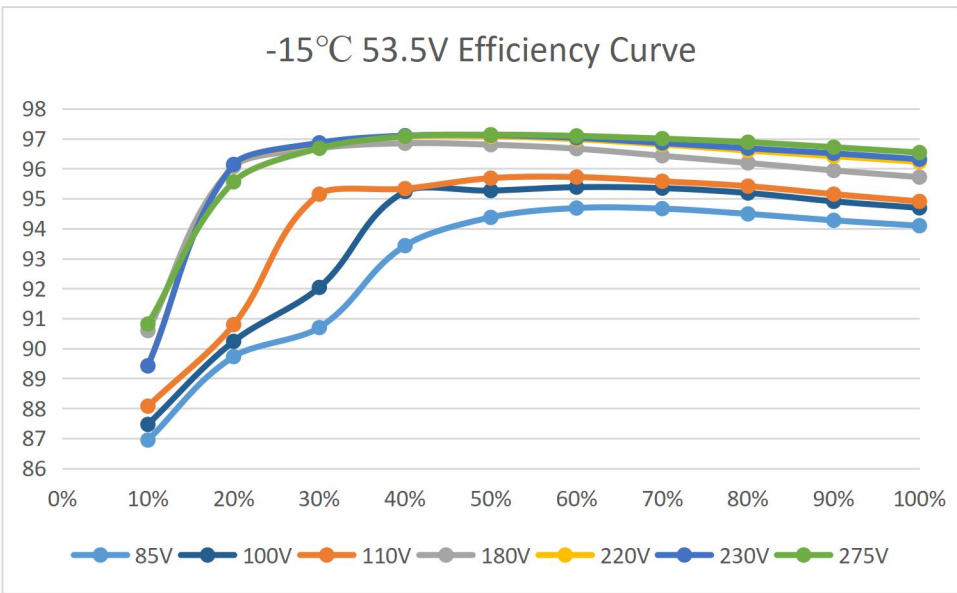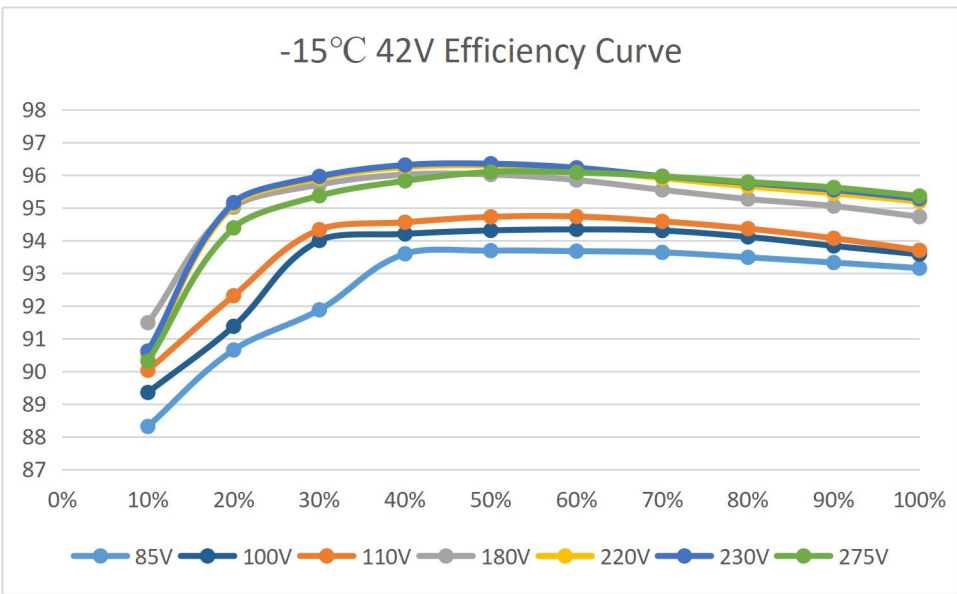

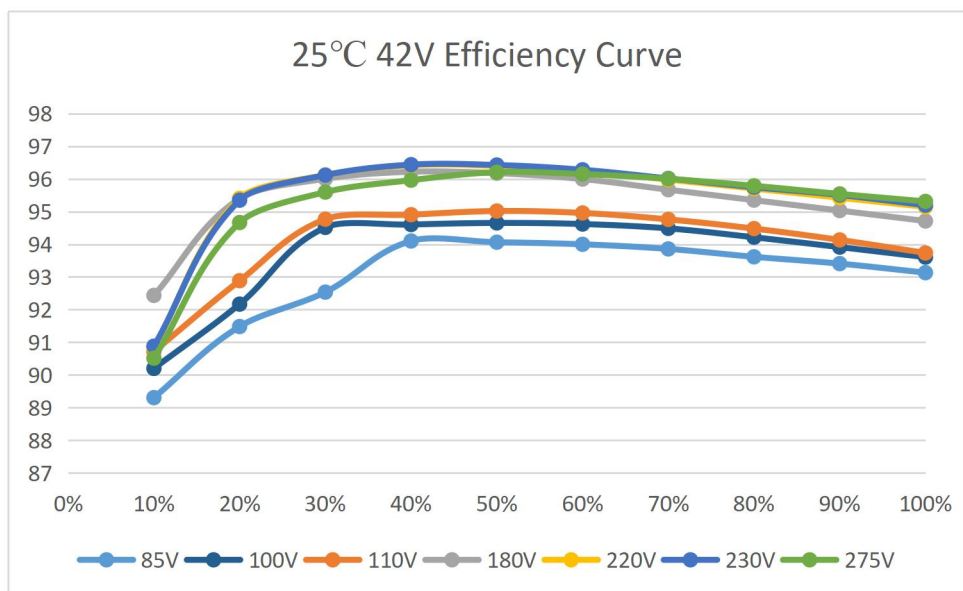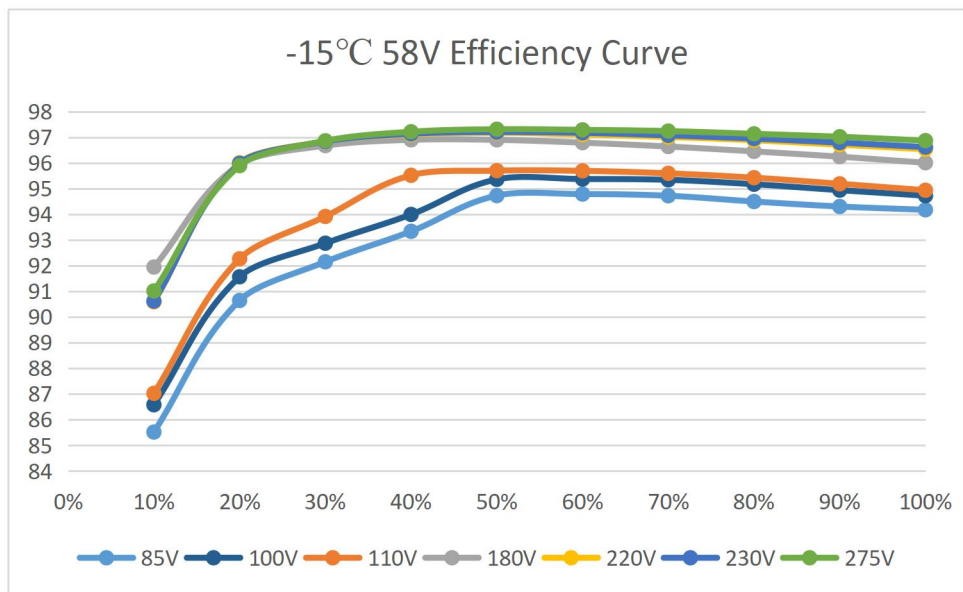


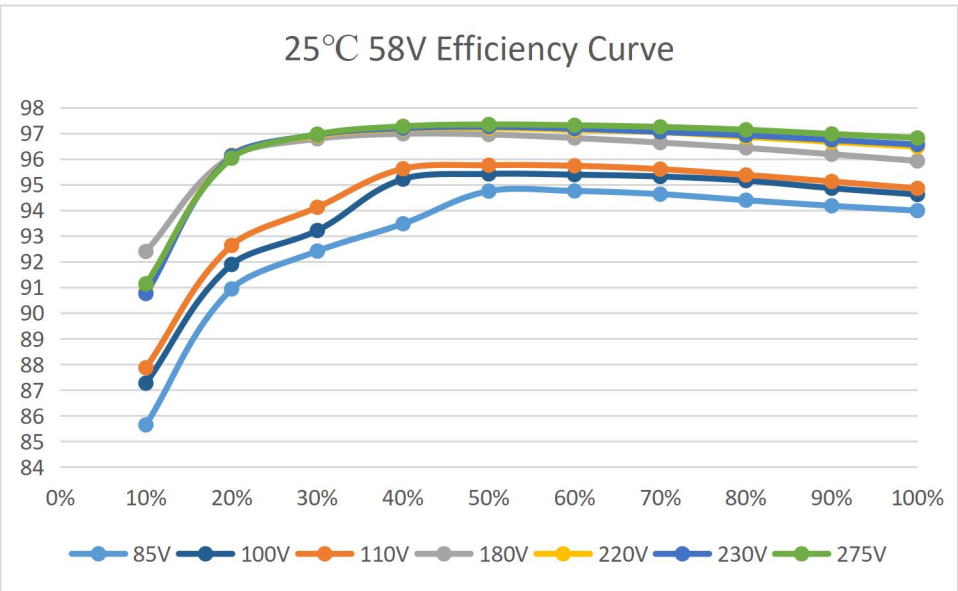
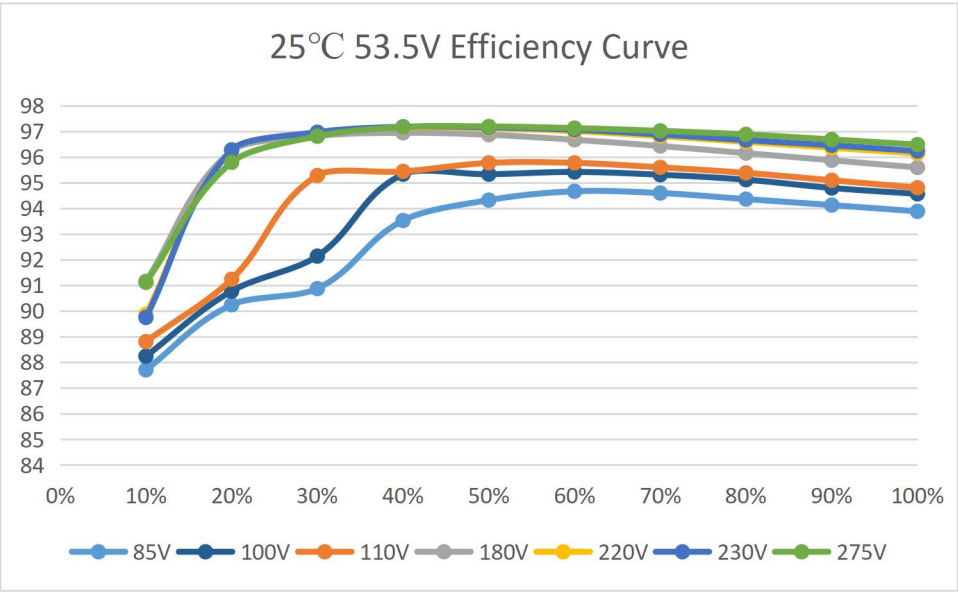


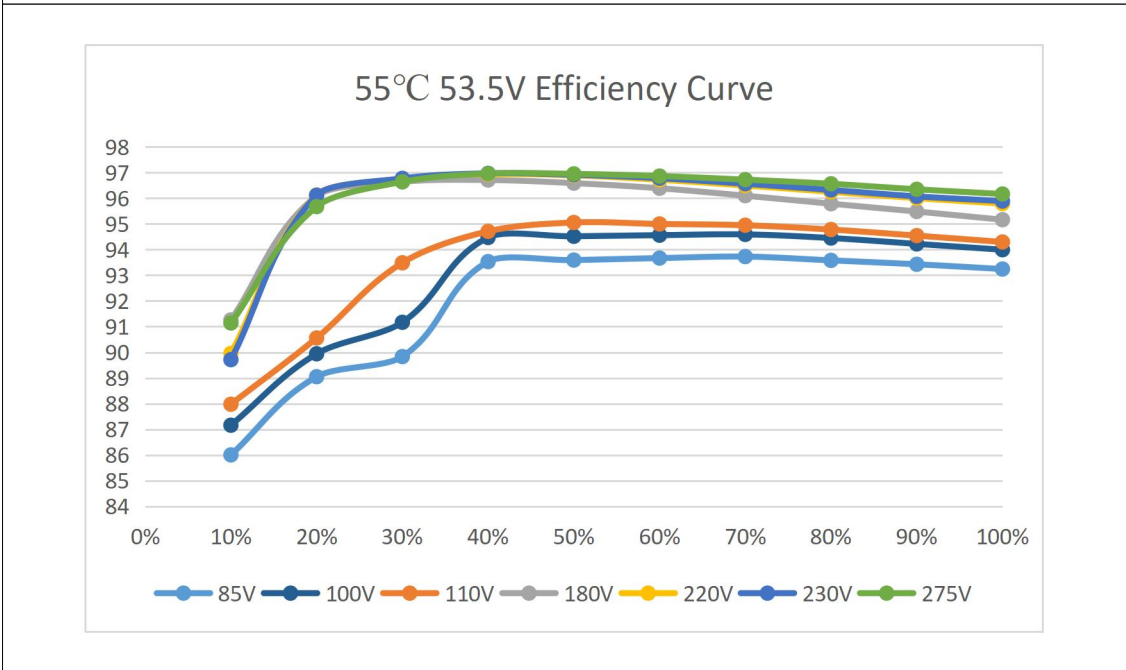
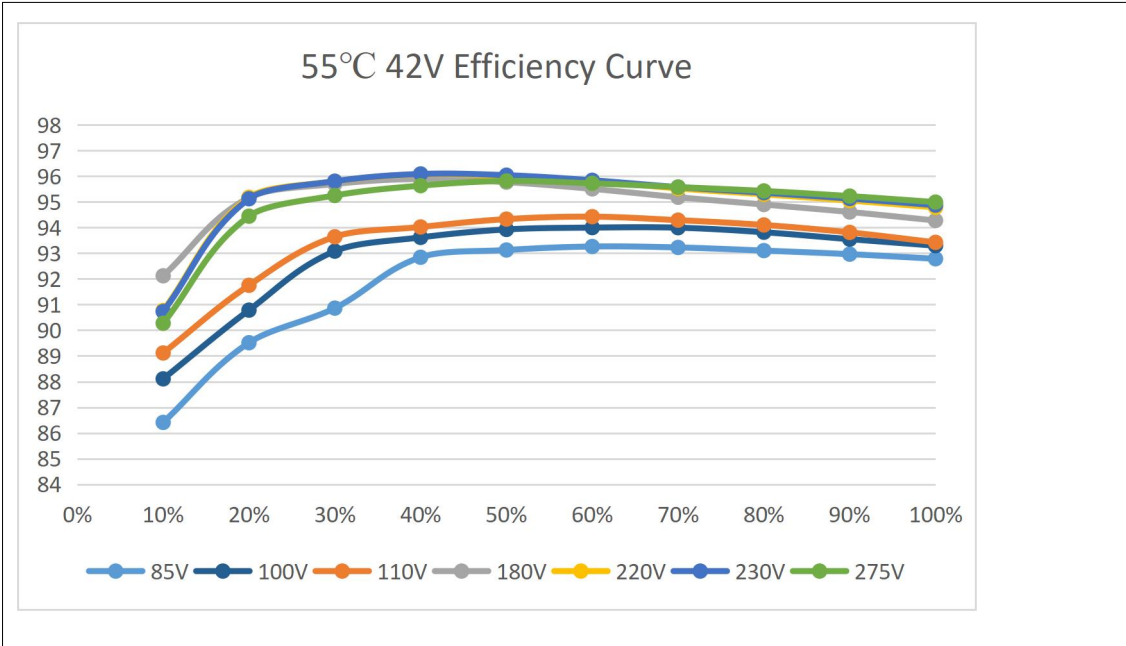



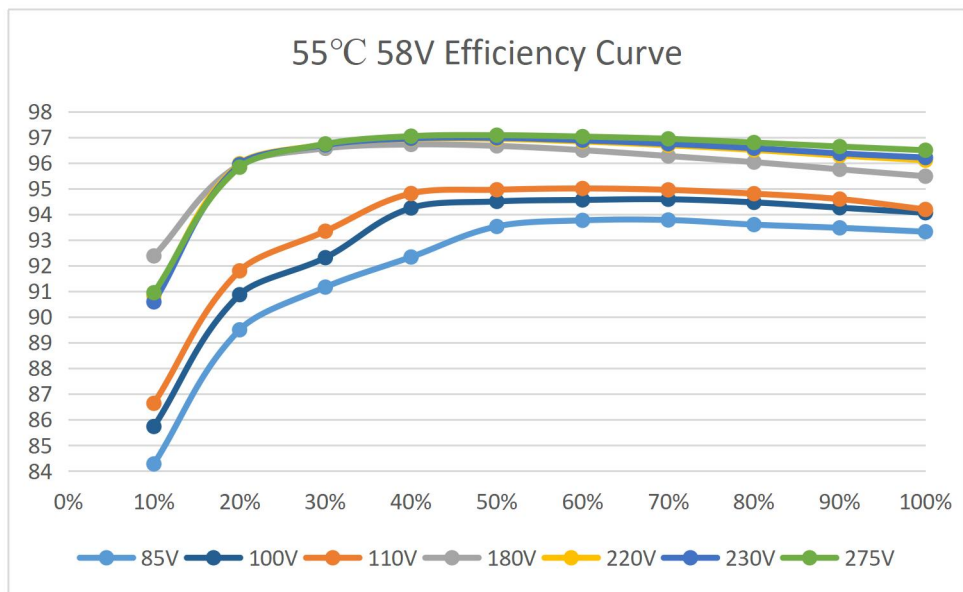




#2

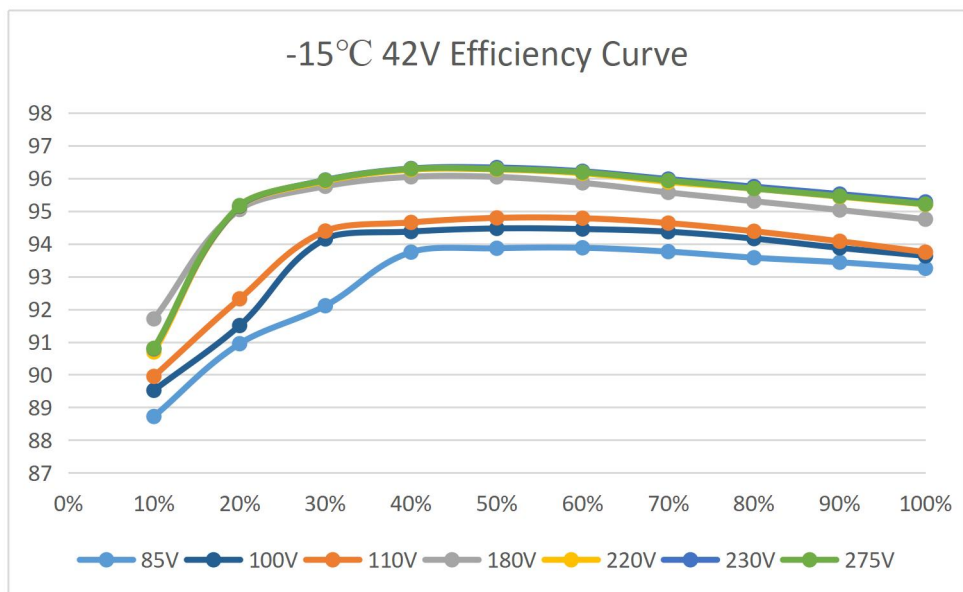

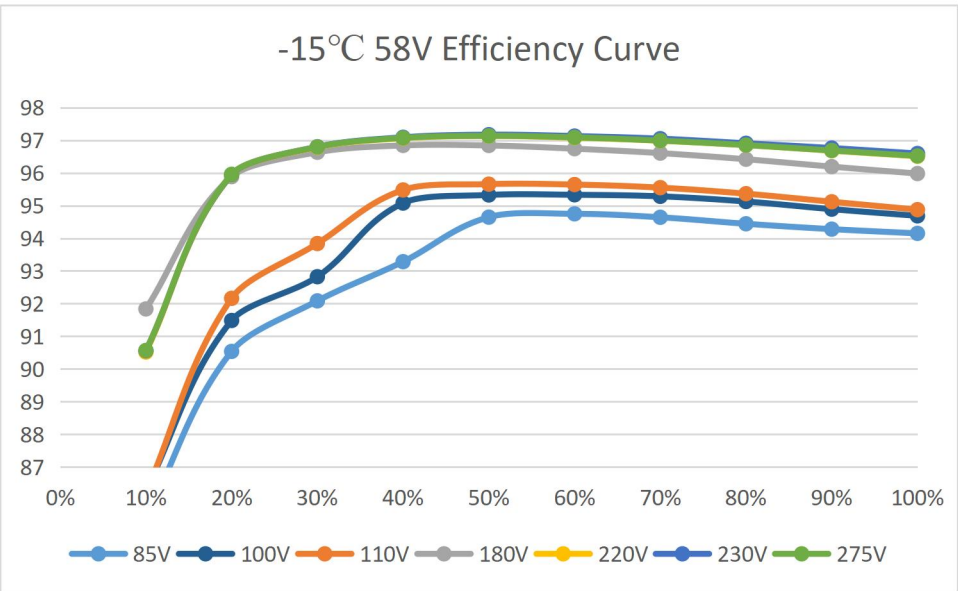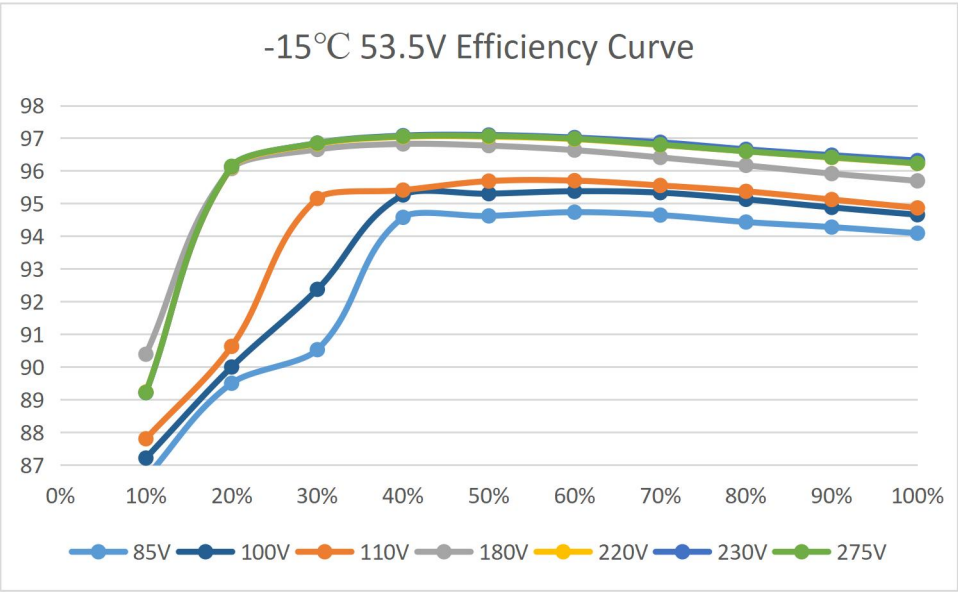

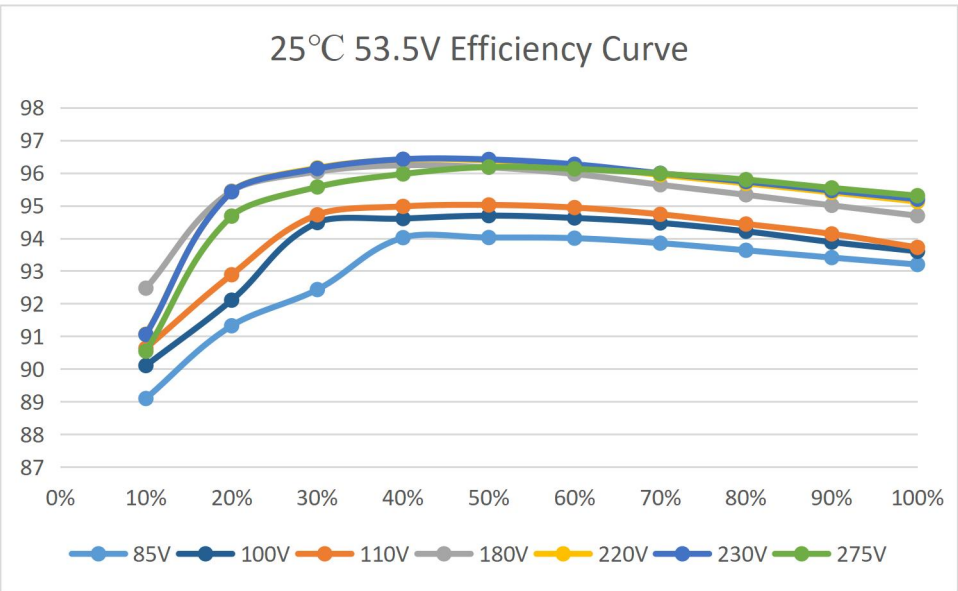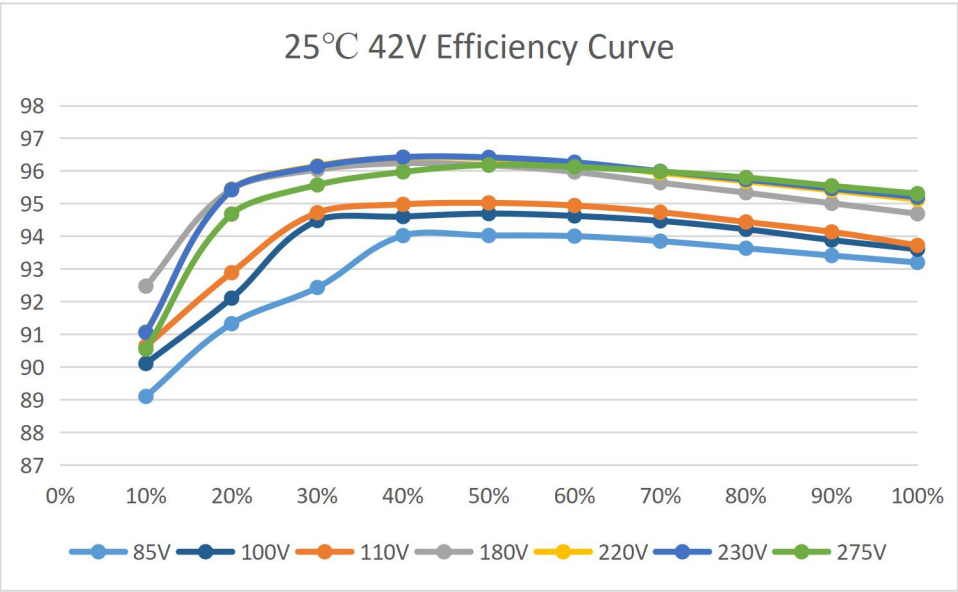

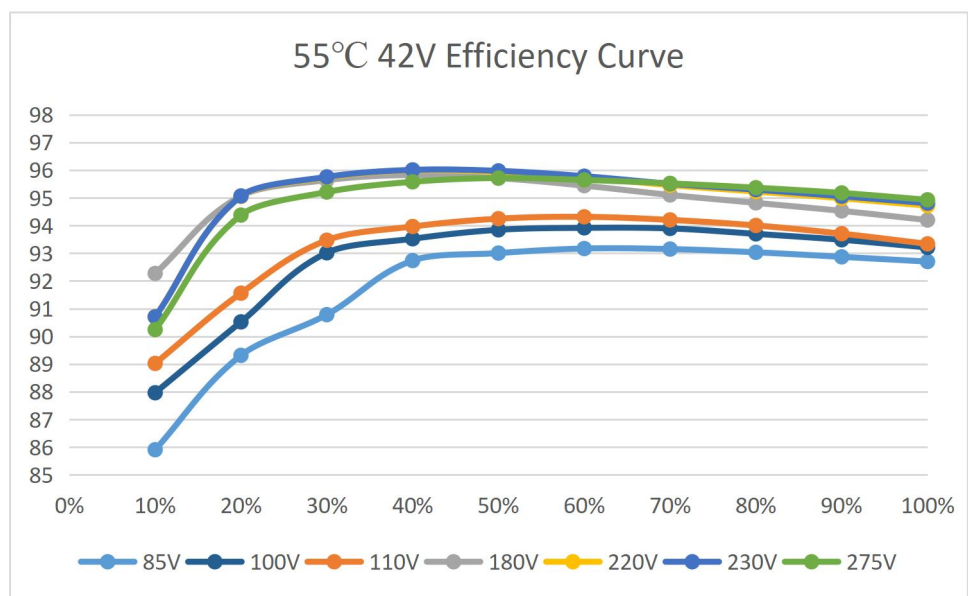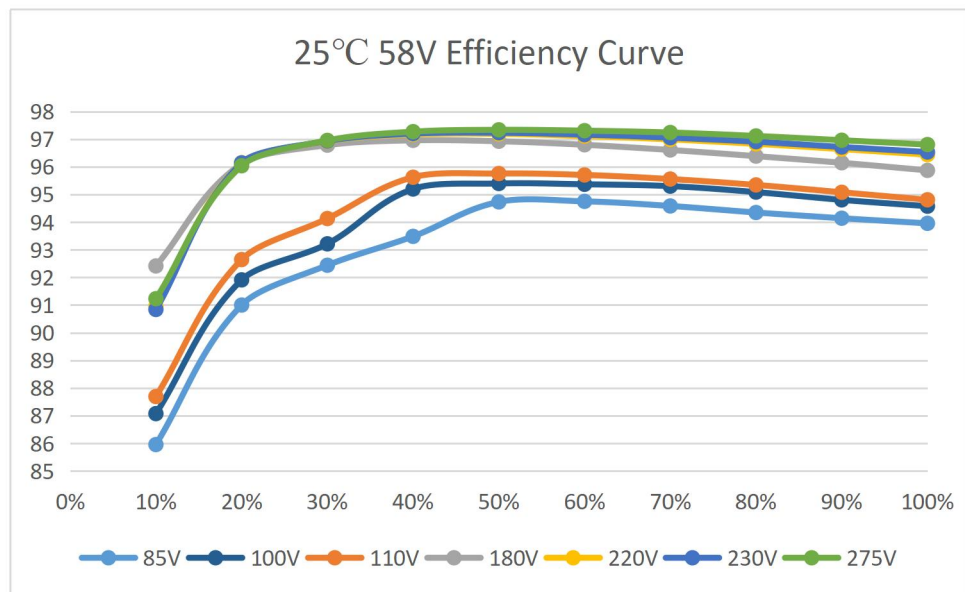

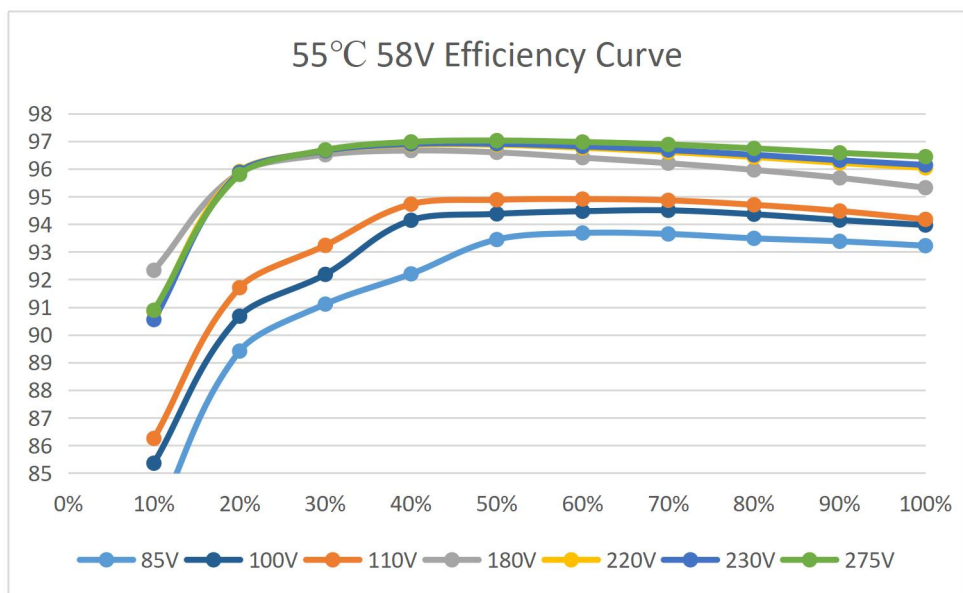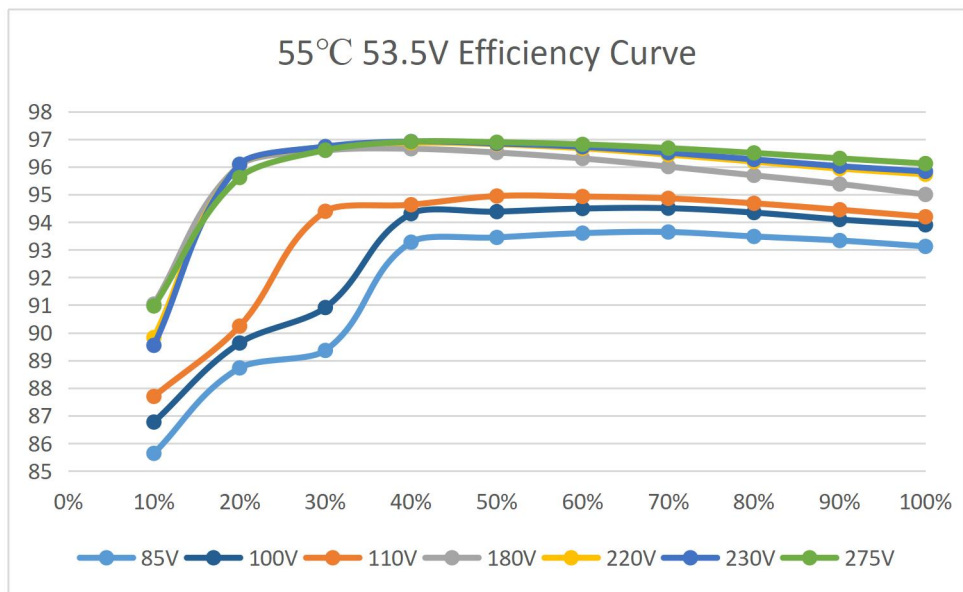


(Manager)

