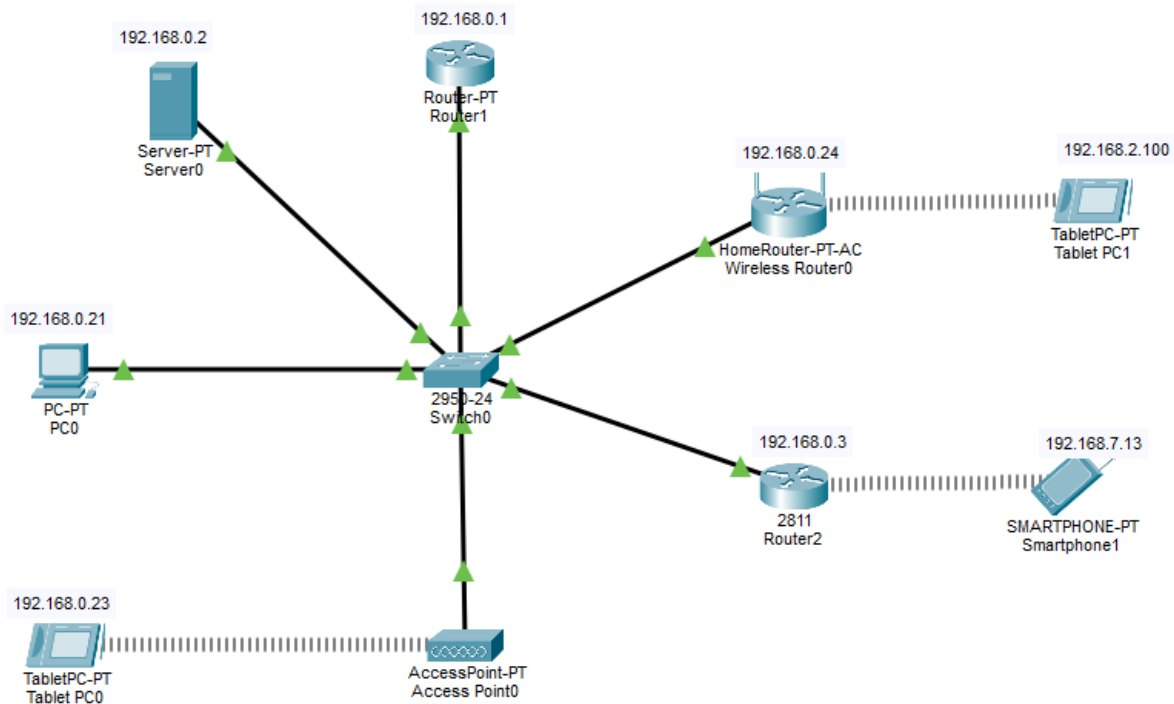

a. Print da Rede no Packet Tracer



b. Ping do PC → Servidor Principal

```
C:\>ipconfig

FastEthernet0 Connection: (default port)

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: FE80::20A:41FF:FE6D:913A
    IPv6 Address . . . . .: ::
    IPv4 Address. . . . .: 192.168.0.21
    Subnet Mask . . . . .: 255.255.255.0
    Default Gateway . . . . .: ::
                               192.168.0.1

Bluetooth Connection:

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: ::
    IPv6 Address . . . . .: ::
    IPv4 Address. . . . .: 0.0.0.0
    Subnet Mask . . . . .: 0.0.0.0
    Default Gateway . . . . .: ::
                               0.0.0.0

C:\>ping 192.168.0.2

Pinging 192.168.0.2 with 32 bytes of data:

Reply from 192.168.0.2: bytes=32 time=1ms TTL=128
Reply from 192.168.0.2: bytes=32 time<1ms TTL=128
Reply from 192.168.0.2: bytes=32 time<1ms TTL=128
Reply from 192.168.0.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

c. Ping Tablet (Rede Principal) → PC

```
C:\>ipconfig

Wireless0 Connection:(default port)

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: FE80::260:2FFF:FED4:2294
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 192.168.0.23
    Subnet Mask . . . . .: 255.255.255.0
    Default Gateway . . . . .: ::
                                   192.168.0.1

3G/4G Cell1 Connection:

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: FE80::201:96FF:FE46:4722
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 0.0.0.0
    Subnet Mask . . . . .: 0.0.0.0
    Default Gateway . . . . .: ::
                                   0.0.0.0

Bluetooth Connection:
--More--
    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: ::
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 0.0.0.0
    Subnet Mask . . . . .: 0.0.0.0
    Default Gateway . . . . .: ::
                                   0.0.0.0

C:\>ping 192.168.0.21

Pinging 192.168.0.21 with 32 bytes of data:

Reply from 192.168.0.21: bytes=32 time=24ms TTL=128
Reply from 192.168.0.21: bytes=32 time=16ms TTL=128
Reply from 192.168.0.21: bytes=32 time=11ms TTL=128
Reply from 192.168.0.21: bytes=32 time=11ms TTL=128

Ping statistics for 192.168.0.21:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 11ms, Maximum = 24ms, Average = 15ms

C:\>
```

d. Ping Tablet (Rede 2) → Home Router

```
C:\>ping 192.168.0.24

Pinging 192.168.0.24 with 32 bytes of data:

Reply from 192.168.0.24: bytes=32 time=15ms TTL=255
Reply from 192.168.0.24: bytes=32 time=19ms TTL=255
Reply from 192.168.0.24: bytes=32 time=10ms TTL=255
Reply from 192.168.0.24: bytes=32 time=11ms TTL=255

Ping statistics for 192.168.0.24:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 10ms, Maximum = 19ms, Average = 13ms

C:\>ipconfig

Wireless0 Connection: (default port)

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: FE80::2D0:BCFF:FE3D:BA90
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 192.168.2.100
    Subnet Mask . . . . .: 255.255.255.0
    Default Gateway . . . . .: ::
                                   192.168.2.1

3G/4G Cell1 Connection:

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: FE80::260:2FFF:FE02:7500
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 0.0.0.0
    Subnet Mask . . . . .: 0.0.0.0
    Default Gateway . . . . .: ::
                                   0.0.0.0

Bluetooth Connection:
--More--
    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: ::
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 0.0.0.0
    Subnet Mask . . . . .: 0.0.0.0
    Default Gateway . . . . .: ::
                                   0.0.0.0

C:\>|
```

e. Ping Smartphone (Rede 3) → Roteador 2811

```
C:\>ipconfig

Wireless0 Connection:(default port)

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: FE80::207:ECFF:FE4E:3988
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 192.168.7.13
    Subnet Mask . . . . .: 255.255.255.0
    Default Gateway . . . . .: ::
                                   192.168.7.1

3G/4G Cell1 Connection:

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: FE80::260:2FFF:FE30:19CA
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 0.0.0.0
    Subnet Mask . . . . .: 0.0.0.0
    Default Gateway . . . . .: ::
                                   0.0.0.0

Bluetooth Connection:
--More--
    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: ::
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 0.0.0.0
    Subnet Mask . . . . .: 0.0.0.0
    Default Gateway . . . . .: ::
                                   0.0.0.0

C:\>ping 192.168.0.3

Pinging 192.168.0.3 with 32 bytes of data:

Reply from 192.168.0.3: bytes=32 time=16ms TTL=255
Reply from 192.168.0.3: bytes=32 time=10ms TTL=255
Reply from 192.168.0.3: bytes=32 time=7ms TTL=255
Reply from 192.168.0.3: bytes=32 time=14ms TTL=255

Ping statistics for 192.168.0.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 7ms, Maximum = 16ms, Average = 11ms

C:\>
```

f. Ping Tablet (Rede 2) → PC (Rede Principal)

```
C:\>ipconfig

Wireless0 Connection:(default port)

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: FE80::2D0:BCFF:FE3D:BA90
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 192.168.2.100
    Subnet Mask . . . . .: 255.255.255.0
    Default Gateway . . . . .: ::
                                   192.168.2.1

3G/4G Cell1 Connection:

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: FE80::260:2FFF:FE02:7500
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 0.0.0.0
    Subnet Mask . . . . .: 0.0.0.0
    Default Gateway . . . . .: ::
                                   0.0.0.0

Bluetooth Connection:
--More--
    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: ::
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 0.0.0.0
    Subnet Mask . . . . .: 0.0.0.0
    Default Gateway . . . . .: ::
                                   0.0.0.0

C:\>ping 192.168.0.21

Pinging 192.168.0.21 with 32 bytes of data:

Reply from 192.168.0.21: bytes=32 time=16ms TTL=127
Reply from 192.168.0.21: bytes=32 time=18ms TTL=127
Reply from 192.168.0.21: bytes=32 time=12ms TTL=127
Reply from 192.168.0.21: bytes=32 time=16ms TTL=127

Ping statistics for 192.168.0.21:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 12ms, Maximum = 18ms, Average = 15ms

C:\>
```

Funcionou, pois a rota foi configurada.

g. Ping PC (Rede Principal) → Tablet (Rede 2)

```
C:\>ipconfig

FastEthernet0 Connection:(default port)

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: FE80::20A:41FF:FE6D:913A
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 192.168.0.21
    Subnet Mask . . . . .: 255.255.255.0
    Default Gateway . . . . .: ::
                                   192.168.0.1

Bluetooth Connection:

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: ::
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 0.0.0.0
    Subnet Mask . . . . .: 0.0.0.0
    Default Gateway . . . . .: ::
                                   0.0.0.0

C:\>ping 192.168.2.100

Pinging 192.168.2.100 with 32 bytes of data:

Reply from 192.168.0.1: Destination host unreachable.
Reply from 192.168.0.1: Destination host unreachable.
Reply from 192.168.0.1: Destination host unreachable.
Reply from 192.168.0.1: Destination host unreachable.

Ping statistics for 192.168.2.100:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>
```

O ping não funcionou, pois não foi configurado o roteamento e caixa NAT não deixa entrar para dentro da rede.

h. Ping Smartphone (Rede 3) → PC (Rede Principal)

```
C:\>ipconfig

Wireless0 Connection: (default port)

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: FE80::207:ECFF:FE4E:3988
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 192.168.7.13
    Subnet Mask . . . . .: 255.255.255.0
    Default Gateway . . . . .: ::
                                   192.168.7.1

3G/4G Cell1 Connection:

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: FE80::260:2FFF:FE30:19CA
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 0.0.0.0
    Subnet Mask . . . . .: 0.0.0.0
    Default Gateway . . . . .: ::
                                   0.0.0.0

Bluetooth Connection:
--More--
    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: ::
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 0.0.0.0
    Subnet Mask . . . . .: 0.0.0.0
    Default Gateway . . . . .: ::
                                   0.0.0.0

C:\>ping 192.168.0.21

Pinging 192.168.0.21 with 32 bytes of data:

Reply from 192.168.0.21: bytes=32 time=12ms TTL=126
Reply from 192.168.0.21: bytes=32 time=18ms TTL=126
Reply from 192.168.0.21: bytes=32 time=15ms TTL=126
Reply from 192.168.0.21: bytes=32 time=14ms TTL=126

Ping statistics for 192.168.0.21:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 12ms, Maximum = 18ms, Average = 14ms

C:\>|
```

Funcionou, pois a rota foi configurada.

i. Ping PC (Rede Principal) → Smartphone (Rede 3)

```
C:\>ipconfig

FastEthernet0 Connection: (default port)

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: FE80::20A:41FF:FE6D:913A
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 192.168.0.21
    Subnet Mask . . . . .: 255.255.255.0
    Default Gateway . . . . .: ::
                                   192.168.0.1

Bluetooth Connection:

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: ::
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 0.0.0.0
    Subnet Mask . . . . .: 0.0.0.0
    Default Gateway . . . . .: ::
                                   0.0.0.0

C:\>
C:\>ping 192.168.7.13

Pinging 192.168.7.13 with 32 bytes of data:

Reply from 192.168.7.13: bytes=32 time=9ms TTL=127
Reply from 192.168.7.13: bytes=32 time=10ms TTL=127
Reply from 192.168.7.13: bytes=32 time=6ms TTL=127
Reply from 192.168.7.13: bytes=32 time=5ms TTL=127

Ping statistics for 192.168.7.13:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 5ms, Maximum = 10ms, Average = 7ms

C:\>
```