




USB_Connector

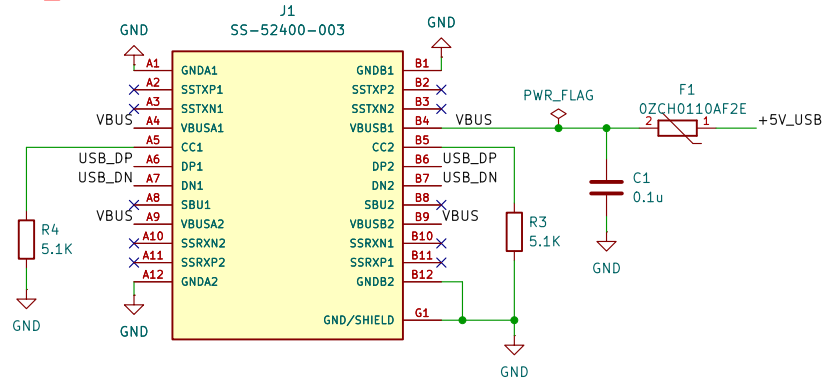


LIPO_Battery Charger

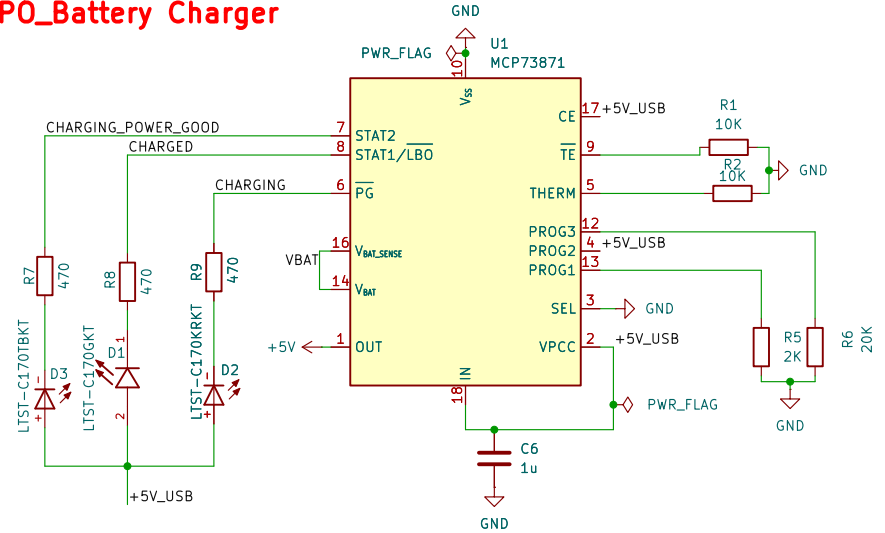


Low Drop Out(LDO) Voltage Regulator

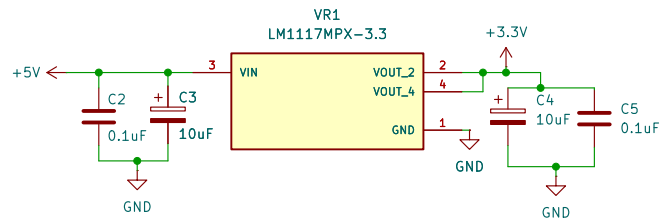

Battery JST Connector



Power Indicator LED



ESP32_C3



File: ESP32_C3.kicad_sch

Sheet: /

File: IOT_development_board.kicad_sch

Title: ESP32 Sensor Board – Root

Size: A4


Date: 2026-08-03

Rev:


KiCad E.D.A. 10.0.5

Id: 1/4


USB Module

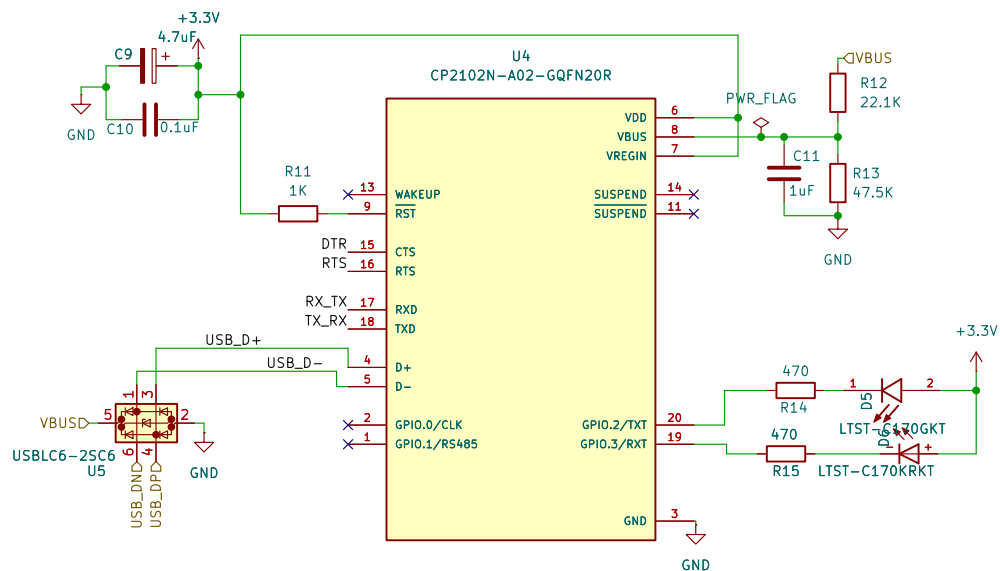


ESP32 CONTROLLER

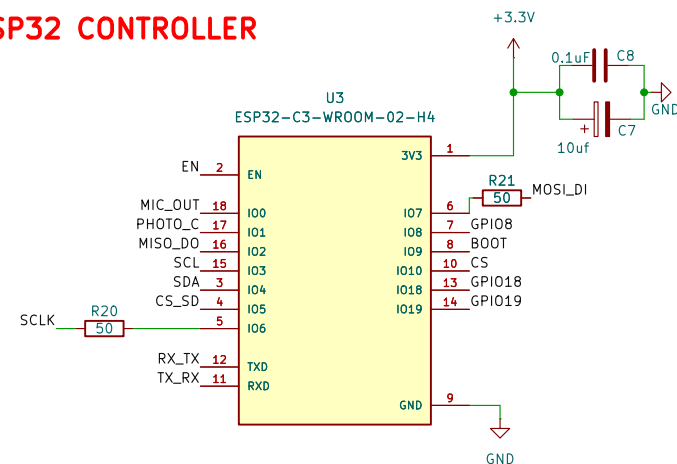

SD CARD MODULE

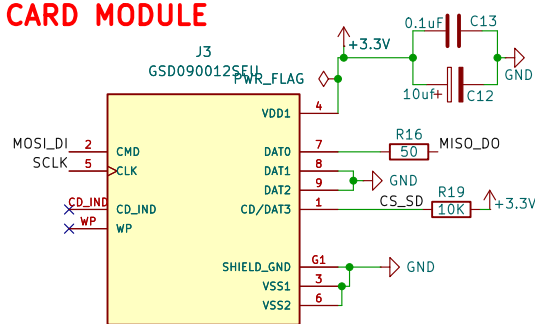

FLASH MEMORY

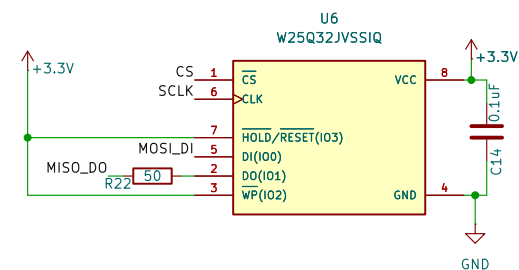


Sensors



File: sensors.kicad_sch

User Interface

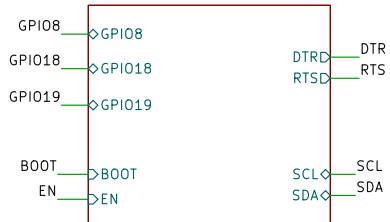

File: user_interface.kicad_sch



TEST POINTS

Sheet: /ESP32_C3/

File: ESP32_C3.kicad_sch

Title: ESP32-C3, USB, SD Card and Flash memory

Size: A4

Date: 2026-08-04

Rev:

KiCad E.D.A. 10.0.5

Id: 2/4

PHOTO SENSOR

Q1
TEMT6000X01

+3.3V

R23
10K

PHOTO_C


GND

MICROPHONE AND AMPLIFIER


The diagram illustrates a microphone and amplifier circuit. The microphone, labeled MK1 CMC-5042PF-AC, is connected to the input of the MAX4466EXK amplifier (U7). The circuit includes several resistors (R26, R27, R28, R29, R30, R31) and capacitors (C16, C17, C18, C19, C20) for biasing and signal conditioning. The output of the amplifier is labeled MIC_OUT. The circuit is powered by a +3.3V supply.

Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 10.0.5		Id: 3/4


OLED Display Connector(I2C)



GPIO Pins



RESET and BOOT Buttons

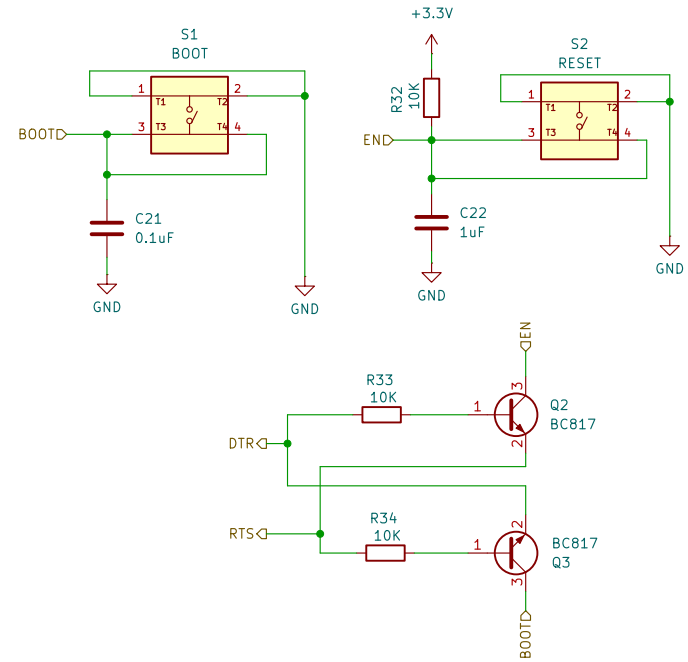

Sheet: /ESP32_C3/User Interface/
File: user_interface.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. 10.0.5

Rev:

Id: 4/4