PRODUCT CATALOGUE 2026

Solar Outdoor, Sports Lighting and Industrial Lighting

Total Light. One Partner.

HPBC Mono PV | LiFePO4 Storage | IP65 / IP66 | 5–10 Year Warranty | OEM / ODM

Integrated solar, decorative landscape and high-performance industrial lighting the right-fit luminaire for every project, at every scale.

HINDLED TECHNOLOGIES INDIA PRIVATE LIMITED

2026

Total Light. One Partner.

At **HINDLED**, lighting is not a product we sell; it is a problem we solve. We are a focused, global lighting house that designs, engineers and supplies the complete spectrum of solar and mains-powered illumination, and then stays with you from first concept to final commissioning.

All specifications, dimensions, model numbers and performance figures in this catalogue are transcribed directly from HINDLED product documentation and are subject to change without notice as part of continuous improvement. Lumen, efficacy and wattage figures are nominal and may vary by configuration, CCT and driver selection. Images are representative. © 2026 HINDLED Technologies India Private Limited. All rights reserved.

Catalogue designed and curated by The Cherry Effect.



SOLAR OUTDOOR LIGHTING

Self-powered street, area, garden and landscape lighting built on high-efficiency HPBC monocrystalline photovoltaics and LiFePO4 energy storage - engineered for autonomy, durability and easy deployment without a grid connection.

01

SOLERA SERIES

SOLERA-LED Solar Vertical Street Lights

8 MODELS


Integrated vertical solar PV pole modules · 100W – 600W



Shared Technical Data			
Parameter	**Specification**	**Parameter**	**Specification**
Cell type (Mono/Thin film)	HPBC Mono	**Junction box IP class**	IP66
Cell Efficiency	> 26%	**Salt spray test**	1000 hrs
Glass	3.2 cloth super white tempered glass	**System voltage**	1000V DC (IEC) / 1500V DC (UL)
EVA	High light transmittance, anti-oxidation, anti-corrosion, UV resistance	**Wind load**	Wind speed: 57 m/s
TPE (black)	High temperature, fatigue, creep & impact resistance	**Working temperature**	-40 °C to 85 °C
PV panel module sides	6	**Peak power temp. coefficient**	-0.47 %/°C
Max. parallel connection Qty	5	**Open-circuit voltage temp. coeff.**	-0.34 %/°C
Tolerance	-3 / +3 %	**Short-circuit current temp. coeff.**	0.045 %/°C

Slim, all-in-one vertical photovoltaic modules engineered to wrap around the pole itself - turning. The entire pole is converted into a power-generating surface. HPBC mono cells across six faces deliver high yield with minimal footprint, while the TPE-clad body. Withstands harsh outdoor environments.

Solar PV Panel - Technical Specifications								
Specification	**HL-PV100-18**	**HL-PV120-18**	**HL-PV160-18**	**HL-PV200-18**	**HL-PV300-36**	**HL-PV400-36**	**HL-PV500-36**	**HL-PV600-36**
Power / Pmax (Wp)	100 Wp	120 Wp	160 Wp	200 Wp	300 Wp	400 Wp	500 Wp	600 Wp
PV type	100WP / 18V	120WP / 18V	160WP / 18V	200WP / 18V	300WP / 36V	400WP / 36V	500WP / 36V	600WP / 36V
Open-circuit voltage / Voc (V)	22	22	22	22	40	40	40	40
Max. power voltage / Vmpp (V)	18.83	18.83	18.83	18.83	36.46	36.46	36.46	36.46
Short-circuit current / Isc (A)	5.63	6.75	9	11.26	8.72	11.63	14.53	17.44
Max. power current / Impp (A)	5.31	6.37	8.5	10.62	8.22	11	13.71	16.46
Dimensions L×OD (cm)	Φ26.5 × 81.5	Φ26.5 × 91.8	Φ26.5 × 128.6	Φ26.5 × 151	Φ41.6 × 121	Φ41.6 × 164.8	Φ41.6 × 195	Φ41.6 × 238.5
Installation pole dia. (mm)	Φ60–Φ168	Φ60–Φ168	Φ60–Φ168	Φ60–Φ168	Φ168–Φ270	Φ168–Φ270	Φ168–Φ270	Φ168–Φ270
PV panel weight (kg)	8.5	10.5	13.5	15	22.5	30	30.5	45

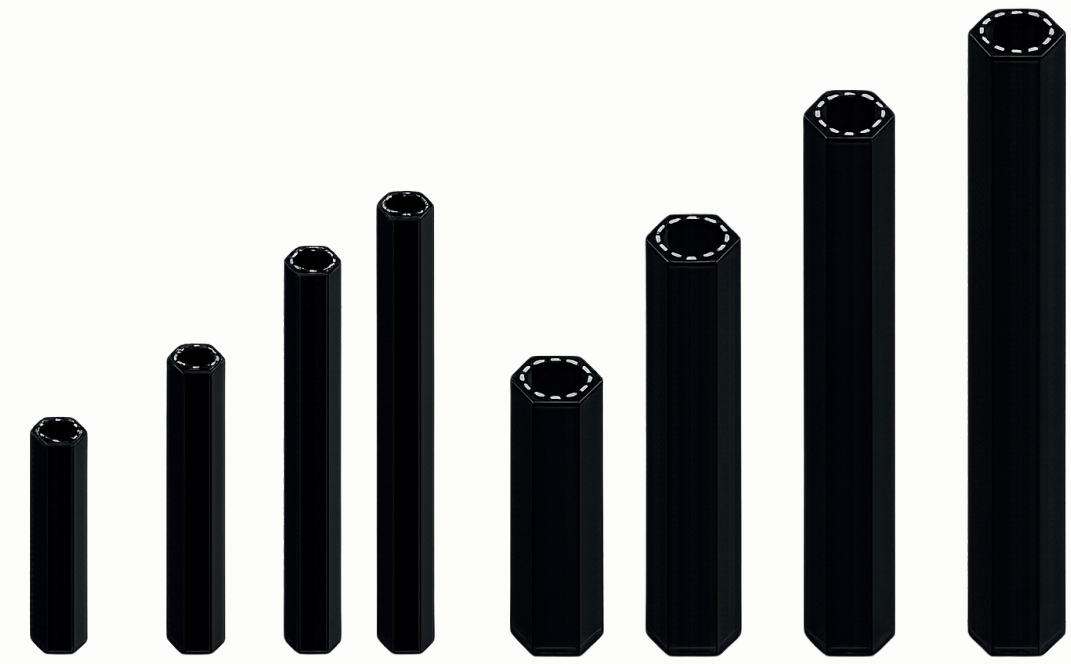

HL - 100W *Solar Module* | HL - 120W *Solar Module* | HL - 180W *Solar Module* | HL - 200W *Solar Module* | HL - 300W *Solar Module* | HL - 400W *Solar Module* | HL - 500W *Solar Module* | HL - 600W *Solar Module*

02

ADITI

ADITI Solar Light Solution

High-performance solar LED luminaire · 20W – 150W



KEY FEATURES

- **Top-tier tempered glass and UV-resistant polycarbonate (PC) lenses for long-lasting efficiency without degradation.**
- **Lamp body die-cast from high-strength aluminium with specialised electrostatic-spraying exterior for stable operation in high temperatures and humidity.**
- **Streamlined design minimises drag coefficient, reducing wind resistance and inhibiting dust accumulation for efficient heat dissipation.**
- **The distinctive large-cavity design houses a substantial quantity of batteries and controllers within the lamp body.**

A premium die-cast luminaire built for split solar street-light systems. The large internal cavity stores batteries, MPPT controller and motion sensor, while the streamlined body cuts wind drag and resists dust build-up for sustained heat dissipation.

Shared Technical Data						
	HL-1053A	HL-1053B	HL-1053C	HL-1053D	HL-1053E	HL-1053F
Rate Power	30W	40W	50W-100W	60W	70W	100W-150W
LED Quantity	16/24pcs 5050	24/36pcs 5050	36/54pcs 5050	40/60pcs 5050	48/72pcs 5050	64/96pcs 5050
Color Temperature	6500/4000/3000K					
Luminous Flux	130-150LUM/W	135-155LUM/W	130-155LUM/W		145-165LUM/W	140-165LUM/W
Input Voltage	AC100-277V					
Frequency Range	50/60Hz					
CRI	Ra70/80					
Temperature of working condition	-40℃~50℃					
Humidity of working condition	20%-90%					
LED life time	100000H (L70B50)					
Protection Grade	IP66					
Installation Pipe Dia	Φ60mm/Φ42mm					
Installation Height	4-6m		5-6m	6-8m	8-10m	
Net Weight	5.0kg	5.1kg	5.1 / 5.2 / 5.3kg	7.0kg	7.0 / 7.2kg	7.2kg
Gross Weight	6.0kg	6.1kg	6.1 / 6.2 / 6.3kg	8.0kg	8.0 / 8.2 kg	8.2kg
Product Size	580x241x130mm			639x275x130mm		
Packing Size	635x285x172mm			685x320x180mm		

03

ZONO SERIES

ZONO-LED Solar Vertical ModuleIntegrated vertical solar PV

Vertical PV pole modules · 100W / 150W / 200W



The Zono vertical module range powers the complete Zono solar family — street lights, area lights, post-tops and bollards. Six-sided HPBC mono construction in a compact Φ26.5 cm body integrates directly onto poles from Φ60 to Φ168 mm.



Shared Technical Data			
	HL-PV100-18	HL-PV150-18	HL-PV200-18
Power / Pmax (Wp)	100 Wp	150 Wp	200 Wp
PV type	100WP / 18V	150WP / 18V	200WP / 18V
Open-circuit voltage / Voc (V)	22	22	22
Max. power voltage / Vmpp (V)	18.83	18.83	18.83
Short-circuit current / Isc (A)	5.63	6.75	9
Max. power current / Impp (A)	5.31	6.37	8.5
imensions L×OD (cm)	Φ26.5 × 81.5	Φ26.5 × 91.8	Φ26.5 × 128.6
Installation pole dia. (mm)	Φ60–Φ168	Φ60–Φ168	Φ60–Φ168
PV panel weight (kg)	8.5	10.5	13.5

04

ZONO SERIES

ZONO-LED Solar Street Light

All-in-two solar street light · 6 – 12 m



Roadway and highway solar street lighting on die- cast ADC12 fixtures with extruded aluminium poles. Single and twin (D) configurations scale from 6 m residential streets to 12 m arterial roads, paired with LiFePO4 storage and 4-step adaptive dimming.



Shared Technical Data				
	HL-ZONO- SSL-20W	HL-ZONO- SSL-30W	HL-ZONO-SSL -D20W	HL-ZONO- SSL- D30W
Height	6 m	8 m	10 m	12 m
Fixture material	Die-cast ADC12 + extruded aluminium 6063			
System colour	Black / silver / customised finishes available			
IP & IK protection	IP65, IK08			
Operating temp.	-15 °C ~ +50 °C			
Warranty	5–10 years			
Power consumption	20W	30W	20W × 2	30W × 2
LED chips	CREE / OSRAM / LUMILEDS / Nichia / SEOUL			
Output	110–150 LM/W			
Light distribution	T2 / T3			
CCT	2700K–6500K			
Runtime	HLD – 4-step dimming			
Battery type	LiFePO4 passive cell-balancing; individual cell monitoring / deeper discharge cycles			
Battery capacity	40Ah 12.8V	50Ah 12.8V	40Ah 12.8V × 2	50Ah 12.8V × 2
Cycles	3000			
Solar module	200W HPBC	200W HPBC	200W × 2 HPBC	200W × 2 HPBC
Solar dimensions	Φ26.5 × 128.6			
Bird spikes	Stainless steel (optional)			
Mounting	Direct bury / base-plate mount			

05

ZONO SERIES

ZONO Solar Area Light – A

Architectural area & campus light · 4 – 8 m



A clean, contemporary area luminaire for plazas, campuses and commercial frontages. Aluminium 6063 body, Philips LEDs and T2 / T5 optics deliver uniform wide-area illumination with single or twin heads.



Shared Technical Data			
	HL-ZONO- SAL-20	HL-ZONO-SAL- D20	HL-ZONO-SAL- DD20
Height	4000 mm	6000 mm	8000 mm
Fixture material	Aluminium 6063		
System colour	Black / Dark Grey / customised finishes available		
IP & IK protection	IP65, IK08		
Operating temp.	-15 °C ~ +50 °C		
Warranty	5–10 years		
Power consumption	20W	20W	20W × 2
LED chips	Philips		
Output	150–170 LM/W		
Light distribution	T2 / T5		
CCT	2700K–6500K		
Runtime	HLD – 4-step dimming		
Battery type	LiFePO4 passive cell-balancing; individual cell monitoring / deeper discharge cycles		
Battery capacity	12.8V 45Ah	12.8V 50Ah	12.8V 45Ah × 2
Cycles	3000		
Solar module	200W HPBC	200W HPBC	200W × 2 HPBC
Solar dimensions	Φ26.5 × 128.6		
Bird spikes	Stainless steel (optional)		
Mounting	Direct Bury / base-plate mount		

06

ZONO SERIES

ZONO Solar Area Light - B

Tapered-arm area light · 6 – 10 m



The B variant carries the same proven ZONO platform on a sculpted, curved arm for taller 6–10 m installations ideal for boulevards, parks and mixed-use developments where form matters as much as output.



Shared Technical Data			
	HL-ZONO- SAL-20	HL-ZONO-SAL- D20	HL-ZONO-SAL- DD20
Height	6000 mm	8000 mm	10000 mm
Fixture material	Aluminium 6063		
System colour	Black / Dark Grey / customised finishes available		
IP & IK protection	IP65, IK08		
Operating temp.	-15 °C ~ +50 °C		
Warranty	5–10 years		
Power consumption	20W	20W	20W × 2
LED chips	Philips		
Output	150–170 LM/W		
Light distribution	T2 / T5		
CCT	2700K–6500K		
Runtime	HLD – 4-step dimming		
Battery type	LiFePO4 passive cell-balancing; individual cell monitoring / deeper discharge cycles		
Battery capacity	12.8V 45Ah	12.8V 50Ah	12.8V 45Ah × 2
Cycles	3000		
Solar module	200W HPBC	200W HPBC	200W × 2 HPBC
Solar dimensions	Φ26.5 × 128.6		
Bird spikes	Stainless steel (optional)		
Mounting	Direct Bury / base-plate mount		

07

ZONO SERIES

ZONO Solar Post-Top

Decorative pedestrian post-top · 4 m



A refined post-top for residential streets, pathways and landscaped grounds. The vertical solar module integrates seamlessly into the column, giving a tidy, glare-controlled light with full LiFePO4 autonomy.



Shared Technical Data	
	HL-ZONO-C1
Height	4000 mm
Fixture material	Aluminium 6063
System colour	Black / Dark Grey / customised finishes available
IP & IK protection	IP65, IK08
Operating temp.	-15 °C ~ +50 °C
Warranty	5–10 years
Power consumption	20W
LED chips	Philips
Output	150–170 LM/W
Light distribution	T2 / T5
CCT	2700K–6500K
Runtime	HLD – 4-step dimming
Battery type	LiFePO4 passive cell-balancing; individual cell monitoring
Battery capacity	3.2V 16Ah LiFePo4
Cycles	3000
Solar module	200W HPBC
Solar dimensions	Φ26.5 × 128.6
Bird spikes	Stainless steel (optional)
Mounting	Direct Bury / base-plate mount

08

SHIVA SERIES

Shiva Solar Bollard Light

Pathway & landscape bollard · 1140 mm



A sculptural twisted-form bollard for walkways, gardens and entrances. Low 1.5W draw with a 25W × 2 HPBC module and 3.2V 16Ah cell delivers dependable all-night accent and wayfinding light.



Shared Technical Data			
	HL-SHIVA-C1	HL-SHIVA-C2	HL-SHIVA-C3
Height	1140 mm	1140 mm	1140 mm
Fixture material	Aluminium 6063		
System colour	Black / Dark Grey / customised finishes available		
IP & IK protection	IP65, IK08		
Operating temp.	-15 °C ~ +50 °C		
Warranty	5–10 years		
Power consumption	1.5W		
LED chips	Philips		
Output	150–170 LM/W		
Light distribution	T2 / T5		
CCT	2700K–6500K		
Runtime	HLD – 4-step dimming		
Battery type	LiFePO4 passive cell-balancing; individual cell monitoring		
Battery capacity	3.2V 16Ah		
Cycles	3000		
Solar module	25W × 2 HPBC		
Solar dimensions	Φ26.5 × 128.6		
Bird spikes	Stainless steel (optional)		
Mounting	Direct Bury / base-plate mount		

09

TEJAS SERIES

TEJAS Solar LED Area Lights

Adjustable-power area light · 3 – 5 m



A versatile area-lighting platform with factory-set, site-adjustable power. Single (S), double-down (DD) and dual-side (DS) heads cover everything from pathways to large open yards, all on a 6063 aluminium pole with monocrystalline solar.



Shared Technical Data				
	HL-TEJAS- S-30 / -35	**HL-TEJAS- S-40 / -45 / -50**	**HL-TEJAS- DD-40 / -45 / -50**	**HL-TEJAS- DS-40 / -45 / -50**
Height	3000 / 3500 mm	4000 / 4500 / 5000 mm	4000 / 4500 / 5000 mm	4000 / 4500 / 5000 mm
Pole material	Aluminium 6063			
Pole colour	Black / silver / customised finishes available			
IP & IK protection	IP65, IK08			
Operating temp.	-15 °C ~ +50 °C			
Warranty	5–10 years			
LED chips	Philips			
Power consumption	Factory-set 30W (1– 30W adjustable on site)	Factory-set 60W (35– 60W adjustable on site)	Factory-set 60W × 2 (1–60W adjustable on site)	Factory-set 60W / 30W (1–60W adjustable on site)
Output	150–170 LM/W			
Light distribution	T2 / T5			
CCT	2700K–6500K			
Runtime	HLD – 4-step dimming			
Battery capacity	12.8V 42Ah LiFePo4	25.6V 42Ah LiFePo4	25.6V 42Ah LiFePo4 x 2	25.6V 42Ah & 12.8V 42Ah LiFePo4
Cycles	3000			
Solar module (Watt)	35W × 4 Mono	70W × 4 Mono	70W × 8 Mono	70W × 4 & 35W × 4
Mounting	Direct bury / base-plate mount			

10

TEJAS SERIES

TEJAS-Solar Smart Pole

Integrated smart pole platform · 6 – 10 m



A multi-service smart pole combining solar area lighting with capacity for surveillance, sensors and connectivity hardware. Built on the ZONO area-light electrical platform with LiFePO4 storage and adaptive dimming.



Shared Technical Data			
	HL-TEJAS- 20	HL-TEJAS- D20	HL-TEJAS- DD20
Height	6000 mm	8000 mm	10000 mm
Pole material	Aluminium 6063		
Pole colour	Black / silver / customised finishes available		
IP & IK protection	IP65, IK08		
Operating temp.	-15 °C ~ +50 °C		
Warranty	5–10 years		
LED chips	Philips		
Power consumption	20W	20W	20W x 2
Output	150–170 LM/W		
Light distribution	T2 / T5		
CCT	2700K–6500K		
Runtime	STD – 4-step dimming		
Battery capacity	12.8V 45Ah LiFePo4	12.8V 50Ah LiFePo4	12.8V 45Ah LiFePo4 x 2
Cycles	3000		
Solar module (Watt)	200W HPBC	200W HPBC	200W x 2 HPBC
Mounting	Direct bury / base-plate mount		

11

HERMES SERIES

HERMES-LED Solar Area Lights

Slim column area light · 3 / 4 / 5 m



A minimalist, louvred column light for parks, trails and premium landscapes. Three sizes (S / M / L) scale power and storage, with T5 optics for controlled, low-glare distribution along paths and perimeters.



Shared Technical Data			
	HL-HERMES-S	**HL-HERMES-M**	**HL-HERMES-L**
Height	3000 mm	4000 mm	5000 mm
Fixture material	Aluminium 6063		
System colour	Black / Silver / customised finishes available		
IP & IK protection	IP65, IK08		
Operating temp.	-15 °C ~ +50 °C		
Warranty	5–10 years		
Power consumption	0-16W	16-25W	25W - 50W
LED chips	CREE / OSRAM / Nichia / SEOUL		
Output	150–170 LM/W		
Light distribution	T5		
CCT	2700K–6500K		
Runtime	HLD – 4-step dimming		
Battery type	LiFePO4 passive cell-balancing; individual cell monitoring		
Battery capacity	24Ah 12.8V LiFePo4	24Ah 12.8V LiFePo4	42Ah 25.6V LiFePo4
Cycles	3000		
Solar module (Watt)	Pmax 100W Mono	Pmax 120W Mono	Pmax 120W × 2 Mono
Mounting	Base-plate mount		

12

SANDHYA SERIES

SANDHYA-LED Solar Garden Light

Classic lantern garden light · 3 – 8 m



A traditional lantern-style solar garden light marrying heritage looks with modern monocrystalline solar and LiFePO4 storage. A wide 5–100W range and 100W–1200W solar option suit gardens, courtyards
and estate roads.



Shared Technical Data	
	HL-SANDHYA
Height	3000 mm - 8000 mm
Fixture material	Aluminium 6063 / Q235
System colour	Black / Silver / customised finishes available
IP & IK protection	IP65, IK08
Operating temp.	-15 °C ~ +50 °C
Warranty	5–10 years
Power consumption	5W - 100W
LED chips	CREE / OSRAM / Nichia / SEOUL
Output	150–170 LM/W
Light distribution	T5
CCT	2700K–6500K
Runtime	HLD – 4-step dimming
Battery type	LiFePO4 passive cell-balancing; individual cell monitoring
Battery capacity	42Ah 12.8V / 42Ah 25.6V LiFePo4
Cycles	3000
Solar module (Watt)	Pmax 100W - 1200W Mono
Mounting	Base-plate mount

13

VENUS SERIES


VENUS-LED Solar Recessed Underground Lights

In-ground drive-over solar marker



Installed cross-section: 140 mm body, 72 mm depth, 3 mm surface flange.

A sealed, drive-over recessed luminaire in 2205 & 304 stainless steel for paths, driveways and plazas. Available as a pure-solar style or a solar + AC supplement type for higher output, both rated for extreme temperature swings.



Shared Technical Data		
	HL-VENUS-HL	**HL-VENUS-HL-AC**
	Solar style	**Solar + AC type (supplement)**
Power consumption	Preset 0.2W	Preset 0–0.5W
Battery capacity	5Ah 3.7V (3.7V 5Ah LiFePo4)	5Ah 3.7V
Solar panel power	Pmax 1.2W	Pmax 1.2W
Working mode	MAX > 40 lm, lighting 8 days	MAX > 90 lm lighting
CCT	2700K ~ 6500K	2700K ~ 6500K
IP protection	IP65	IP65
IK protection	IK08	IK08
Housing material	2205 & 304 stainless steel + PC + glass	2205 & 304 stainless steel + PC + glass
Housing colour	Silver	Silver
Dimensions	170 × 170 × 84 mm, Φ140 mm	170 × 170 × 84 mm, Φ140 mm
Warranty	5–10 years	5–10 years
Operating temp.	-20 °C~+45 °C & -40°C~+100 °C	-20 °C~+45 °C & -40°C~+100 °C

Installed cross-section: 140 mm body, 72 mm depth, 3 mm surface flange.

14

VION LIGHTING

VION Lightning Adjustable-Angle Wall Wash Lights

Linear solar wall-wash · 1000 mm



A 1-metre linear solar wall-wash with an adjustable-angle bracket and selectable wide / middle / narrow optics. Aluminium 6063 body with a 20W panel and 15Ah battery delivers ≥400 lm for facades and feature walls.





Shared Technical Data				
	HL-VION- S-30 / -35	**HL-VION- S-40 / -45 / -50**	**HL-VION- DD-40 / -45 / -50**	**HL-VION- DS-40 / -45 / -50**
Height	3000 / 3500 mm	4000 / 4500 / 5000 mm	4000 / 4500 / 5000 mm	4000 / 4500 / 5000 mm
Pole material	Aluminium 6063			
Pole colour	Black / silver / customised finishes available			
IP & IK protection	IP65, IK08			
Operating temp.	-15 °C ~ +50 °C			
Warranty	5–10 years			
LED chips	Philips			
Power consumption	Factory-set 30W (1– 30W adjustable on site)	Factory-set 60W (35– 60W adjustable on site)	Factory-set 60W × 2 (1–60W adjustable on site)	Factory-set 60W / 30W (1–60W adjustable on site)
Output	150–170 LM/W			
Light distribution	T2 / T5			
CCT	2700K–6500K			
Runtime	HLD – 4-step dimming			
Battery capacity	12.8V 42Ah LiFePo4	25.6V 42Ah LiFePo4	25.6V 42Ah LiFePo4 x 2	25.6V 42Ah & 12.8V 42Ah LiFePo4
Cycles	3000			
Solar module (Watt)	35W × 4 Mono	70W × 4 Mono	70W × 8 Mono	70W × 4 & 35W × 4
Mounting	Direct bury / base-plate mount			

15


DHRUV SERIES

DHRUV LED Solar Recessed Wall Wash Lights

Recessed asymmetric wall-wash · S / M / L



A flush, recessed solar wall-wash with asymmetric optics for steps, retaining walls and architectural niches. Carbon-steel housing with PC + glass face; three sizes scale output from 120 lm to 1200 lm.

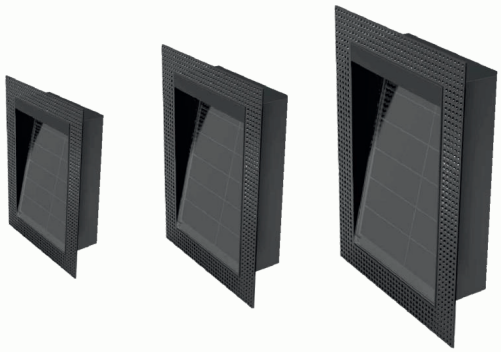

Shared Technical Data			
	HL-DHRUV-S	**HL-DHRUV-M**	**HL-DHRUV-L**
LED output	MAX > 120 lm	MAX > 300 lm	MAX > 1200 lm
Power consumption	0.8W	1.6W	5W
Battery capacity	2Ah 12.8V	4Ah 12.8V	8Ah 12.8V
Solar panel power	Pmax 4W	Pmax 10W	Pmax 30W
Working mode	HLD – 4-step dimming		
Rainy day	4–8 days		
Photometric options	Asymmetric		
CCT	2700K–6500K		
IP & IK protection	IP65 & IK08		
Housing material	Carbon steel + PC + glass		
Housing colour	Black		
Dimensions	L 264 × W 198 × H 93 mm	L 385 × W 283 × H 93 mm	L 600 × W 365 × H 93 mm
Recess cut-out	205 mm (89 mm deep)	305 mm (89 mm deep)	540 mm (89 mm deep)
Warranty	5–10 years		

16

HL MANGAL STAMBH WOODEN

MANGAL STAMBH-WD-LED Solar Area Lights

Wooden-pole area light · 3 – 5 m



The MANGAL platform in a natural wooden-pole finish for parks, waterfronts and eco-sensitive sites. Single (S-WD) and double-down (DD-WD) heads combine warm material aesthetics with high-output monocrystalline solar.




Shared Technical Data		
	HL-MANGAL-S-WD	**HL-MANGAL-DD-WD**
Height	3000 mm ~ 5000 mm	
Pole material	Wooden	
Pole colour	Wood	
IP & IK protection	IP65, IK08	
Operating temp.	-15 °C ~ +50 °C	
Warranty	5–10 years	
LED chips	Philips	
Power consumption	15W ~ 60W	(15W ~ 60W) × 2
Output	150–170 LM/W	
Light distribution	T2 / T5	
CCT	2700K–6500K	
Runtime	HLD – 4-step dimming	
Battery capacity	25.6V 42Ah LiFePo4	25.6V 42Ah LiFePo4 × 2
Cycles	3000	
Solar module (Watt)	Pmax 100W ~ 400W Mono	Pmax 70W × 8 Mono
Mounting	Direct bury / base-plate mount	

17

SATYA WOODEN

SATYA-WD-LED Solar Bollard Lights

Wooden-finish bollard · 500 – 1000 mm

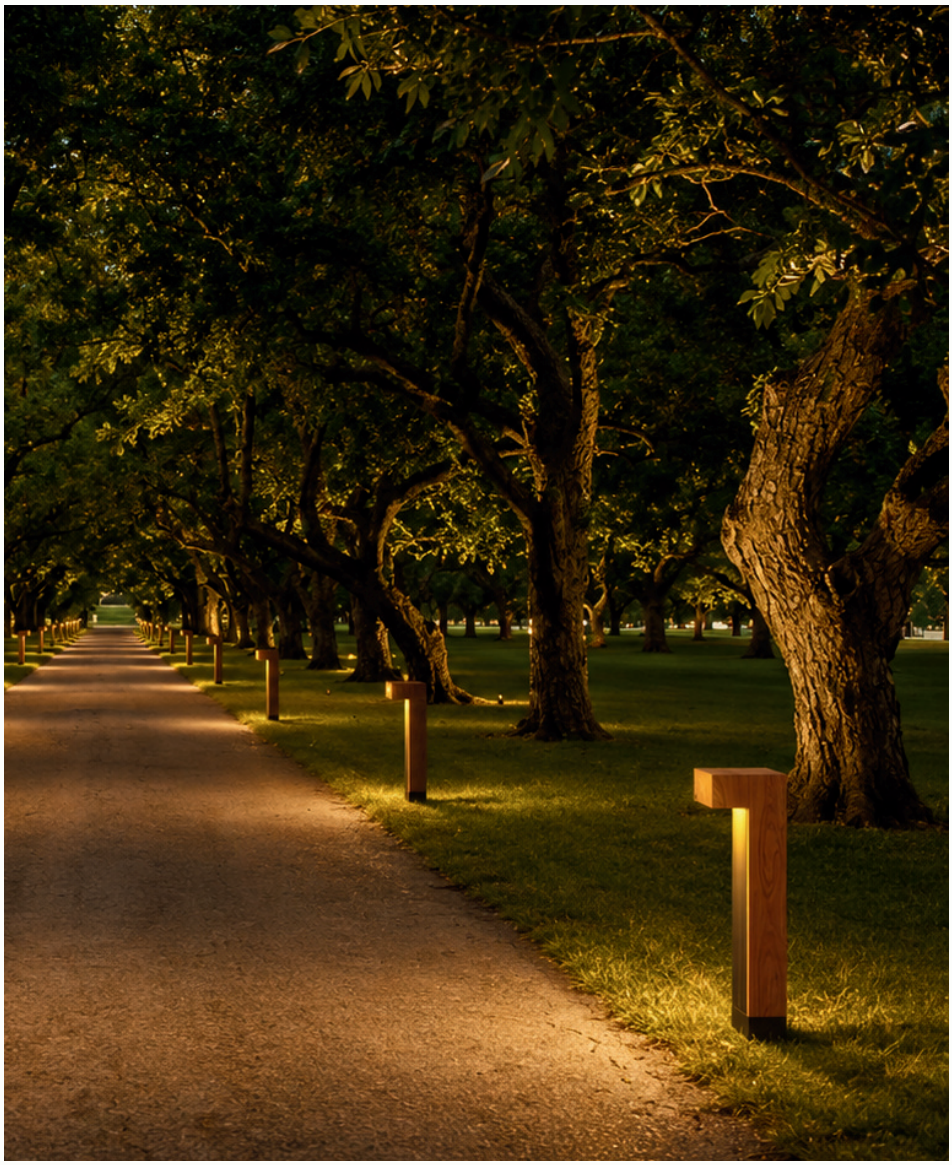

A warm, wood-grain bollard for garden paths, resorts and premium landscapes.
Aluminium 6063 + carbon-steel core with symmetric optics, Philips / Seoul LEDs and a compact 4Ah LiFePo4 cell.



Shared Technical Data	
	HL-SATYA-WD
Height	500 mm ~ 1000 mm
Pole material	Aluminium 6063 + carbon steel / wooden
Pole colour	Bronze / black / wood grain — customised finishes available
IP & IK protection	IP65, IK08
Operating temp.	-15 °C ~ +50 °C
Warranty	5–10 years
LED chips	Philips / Seoul
Power consumption	1W ~ 10W
Output	≥ 100 LM/W
Light distribution	Symmetric
CCT	2700K ~ 6500K
Runtime	HLD – 4-step dimming
Battery capacity	12.8V 4Ah LiFePo4
Cycles	3000
Solar module (Watt)	Pmax 17W × 1 / 17W × 2 Mono
Mounting	Direct bury / base-plate mount



SPORTS LIGHTING

Mains-powered high-performance luminaires for stadiums, high-mast sites, ports, logistics yards and industrial facilities - delivering long-throw distribution, strong uniformity and acceptance-ready photometrics with low maintenance risk.


19

HL GAJ

High-Power Integrated Square Stadium Floodlight

Professional stadium floodlight · 600W – 1800W




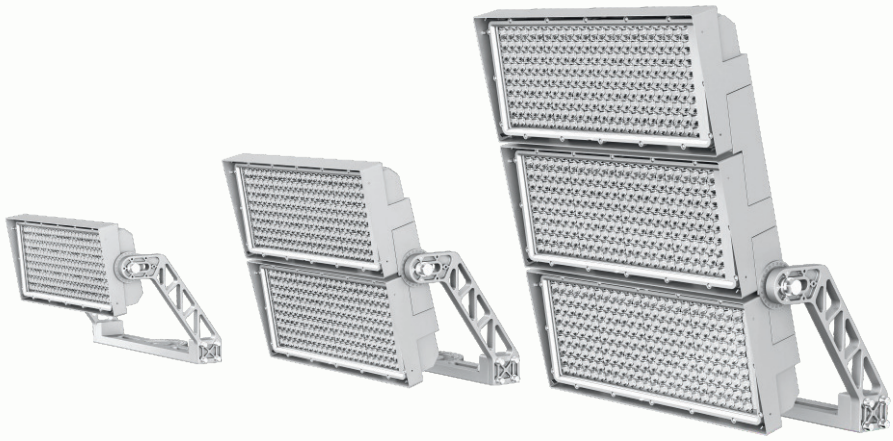


Shared Technical Data			
Model no.	**HL-750W**	**HL-1500W**	**HL-2250W**
Power (±5%)	600W / 750W	1200W / 1500 W	1800W / 2250W
Driver	Inventronics / Moso / Powerland / uPowerTek		
Input voltage	AC200-480V / 198-440V / 180-528V		
Power Factor	>0.95		
Surge Protection	10KV		
THD	<15% (@480Vac / 60Hz / 25°C / Full load)		
Control	0-10V / DMX512 / DALI / RGB / RGBW		
LED Type	Osram 3737 / Lumileds 5050		
Light Efficacy (@5000K, Ra70)	170Lm/W / 160Lm/W		
Luminous Flux (±10%)	102,000Lm / 120,000Lm	204,000Lm / 240,000Lm	306,000Lm / 360,000Lm
Correlated Color Temperature	3000K / 4000K / 5000K / 5700K / 6500K		
Color Rendering Index	70 / 80 / 90 / TLCI90 Optional		
SDCM	≤6		
Beam Angle	10° / 20° / P55		
Product Dimension	L379×W634×H371mm (L14.92"×W24.96"×H14.60")	L501×W634×H388mm (L19.72"×W24.96"×H15.27")	L741×W634×H388mm (L29.17"×W24.96"×H15.27")
Luminaire Net Weight	11Kg±0.5	18Kg±0.5	25Kg±0.5
Mounting Option	U-Bracket Mounting		
Structure & Material & Finish	Die-casting Heat Sink / ADC12 / Powder Coated. Die-casting Bracket / ADC12 / Powder Coated		
Lens	PC Lens+Glass		
EPA	2.5 ft²		
Operating Temperature	-40°C~+50°C (-40°F~+122°F)		
Life Time of LED @Ta=25°C	50,000 Hours		
Warranty	5 years		
Protection & control	IK08 / IK10, IP66 · DMX512 · DALI · DALI-2 · 0-10V		


KEY FEATURES

- Integrated square design for predictable stadium photometrics.
- Sports optics supporting uniformity and long- throw requirements.
- Low-glare and spill-light control; optional visors/shields.
- Robust die-cast aluminium housing for stable thermal management.
- IP66 sealing + outdoor corrosion-resistant coating.
- Service-friendly construction for quicker on-site maintenance.
- Surge-protection options for pole / high-mast installations.
- Secure aiming bracket with reliable locking; ±180° adjustment.
- Control / dimming options available (project- configurable).





A high-power integrated square stadium floodlight engineered for professional performance with a cost-optimised project approach. It targets mainstream tenders and upgrades needing strong uniformity and glare control while keeping system cost and deployment complexity under control.

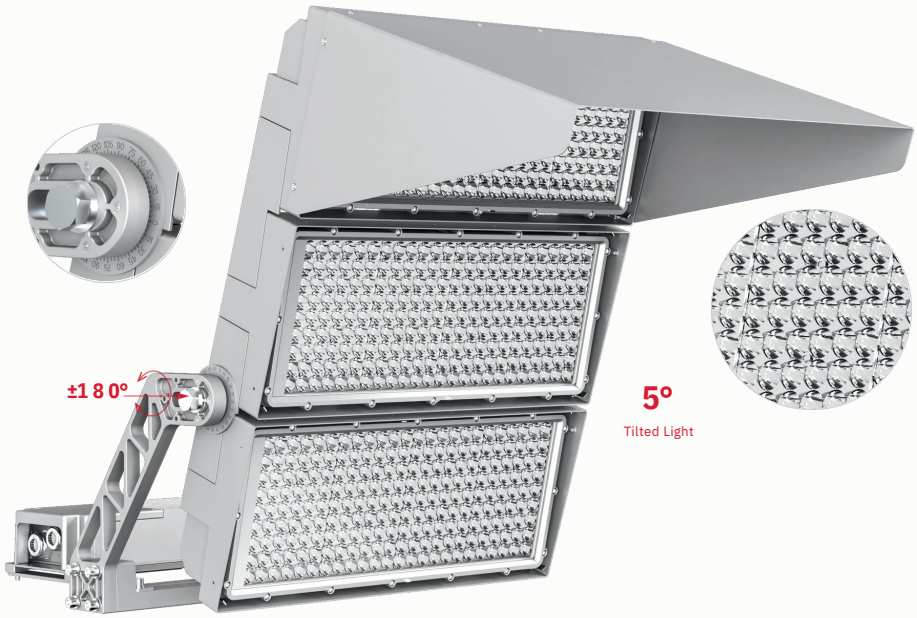



INDUSTRIAL LIGHTING

Mains-powered high-performance luminaires for stadiums, high-mast sites, ports, logistics yards and industrial facilities - delivering long-throw distribution, strong uniformity and acceptance-ready photometrics with low maintenance risk.

20

HL ULTRA BEAM

High-Output Industrial High Bay

Warehouse & manufacturing high bay · 100W – 240W



KEY FEATURES

- High-output industrial high-bay platform for general facilities
- Practical optics for open areas and racking / aisle applications.
- Robust housing and stable thermal management.
- IP65 protection for dusty / humid indoor environments.
- Surge-protection options for electrical reliability.
- Multiple mounting options (project-configurable).
- Service-friendly design for faster maintenance.
- Dimming / control options available (project- configurable).
- Consistent performance for tender and OEM / ODM projects.





A high-output industrial high bay for broad, uniform illumination in warehouses and manufacturing Protection IK10, IP65 · dimming areas. A practical, project-friendly round platform with switchable beam, power and CCT 3 beam × 3 power × 3 CCT in one fixture.

Shared Technical Data				
Model No.	**HL12-100W**	**HL12-150W**	**HL12-200W**	**HL12-240W**
Power	100W	150W	200W	240W
Input voltage	220–240V / AC 100–277V			
Light efficiency	140–200 Lm/W			
Lumen flux	14,000–48,000 Lm			
CRI	Ra70 / 80+			
CCT	3000K–6500K			
Dimensions (mm)	Φ200 × 148	Φ280 × 148	Φ300 × 148	Φ336 × 151
Net weight	1.45 kg ± 0.5	1.6 kg ± 0.5	2.15 kg ± 0.5	2.3 kg ± 0.5
Beam angles	60° / 90° / 120° (switchable) — 3 beam × 3 CCT power × 3			
Warranty	5 years			
Protection	IK10, IP65 · dimming			

HINDLED TECHNOLOGIES INDIA PRIVATE LIMITED

Total Light. One Partner.

At HINDLED, lighting is not a product we sell; it is a problem we solve. We are a focused, global lighting house that designs, engineers and supplies the complete spectrum of solar and mains-powered illumination, and then stays with you from first concept to final commissioning.

Our range runs end-to-end: from integrated vertical solar street lights and decorative landscape fittings for homes, communities and hospitality spaces, through to stadium-grade floodlights and industrial high bays for the most demanding infrastructure. No matter the scale, every fitting is engineered for harsh environments, long service life, and project-ready deployment.

What sets us apart is not breadth alone, but judgement. We work with every kind of client - the single residence, the architectural landscape, the factory floor, the sports arena, the highway and the heavy-duty industrial project — and we begin by understanding the application before recommending the fixture. Our team assesses the site, the optics, the controls and the operating conditions, and specifies the right-fit solution rather than the largest one. That is what we mean by a total light solution: the correct light, correctly delivered, fully supported.

Backed by in-house engineering, OEM/ODM capability and tender-grade documentation, HINDLED operates with the depth of a large enterprise and the precision of a specialist. For every project, from your home to your heaviest installation, we are the single partner accountable for the result.

SOLAR PLATFORM

- HPBC monocrystalline PV, cell efficiency > 26%
- LiFePO4 storage with passive cell balancing
- 3000-cycle battery design life
- HLD 4-step adaptive dimming
- IP65 / IP66 ingress, IK08 impact rating

INDUSTRIAL PLATFORM

- Die-cast aluminium, IP66 sealing
- 3-in-1 wattage & CCT adjustability
- Long-throw optics 10°–120°
- 0-10V / DALI / DMX512 control ready
- Surge protection for high-mast sites
- 5–10 year warranty finishes
- Direct-bury & base-plate mounting
- OEM / ODM & tender support

@hindled7

+91 9560621310

MAKE IN INDIA

Factory Address: F455,457 Phase - 1, RICCO Industry Area, Bhiwadi Rajasthan - 301019
Office Address: Hindled Technologies India Pvt LTD B302, Maurya apartment plot no. 95 IP extension delhi 110092

All specifications, dimensions, model numbers and performance figures in this catalogue are transcribed directly from HINDLED product documentation and are subject to change without notice as part of continuous improvement. Lumen, efficacy and wattage figures are nominal and may vary by configuration, CCT and driver selection. Images are representative. © 2026 HINDLED Technologies India Private Limited. All rights reserved.
Catalogue designed and curated by The Cherry Effect.