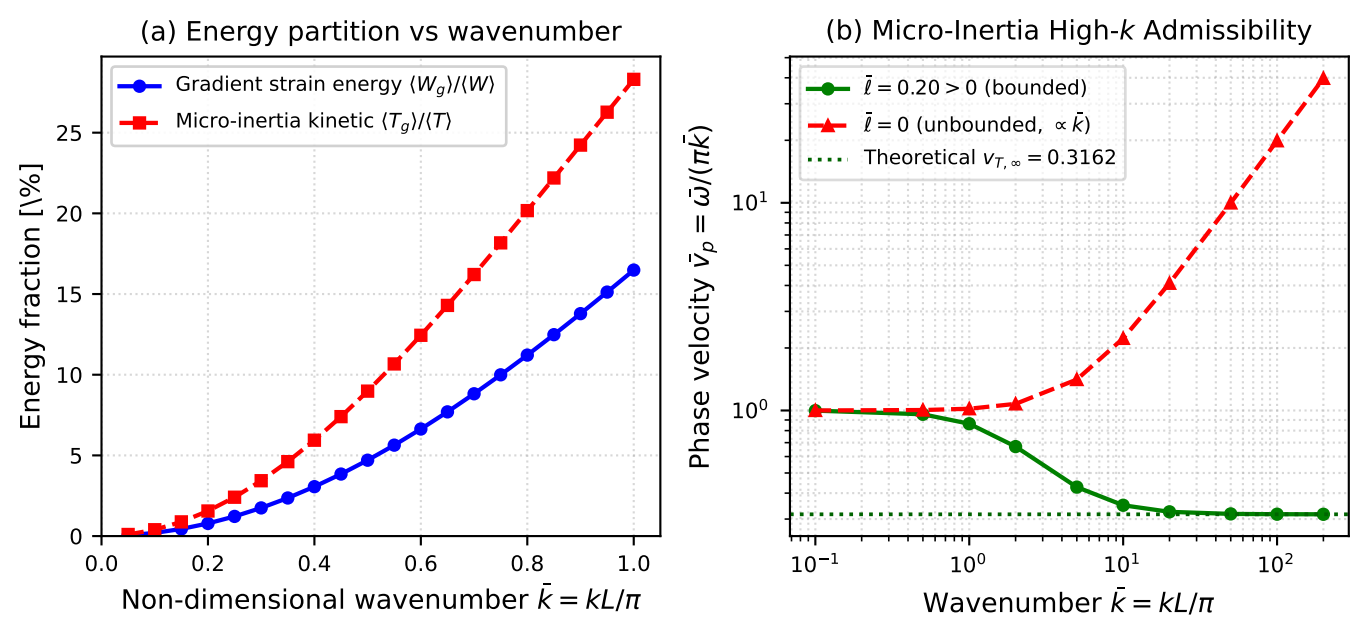
(a) Energy partition vs wavenumber
Gradient strain energy $\langle W_g \rangle / \langle W \rangle$
Micro-inertia kinetic $\langle T_g \rangle / \langle T \rangle$
Energy fraction [\%]
Non-dimensional wavenumber $\bar{k} = kL/\pi$
(b) Micro-Inertia High-k Admissibility
$\bar{\ell} = 0.20 > 0$ (bounded)
$\bar{\ell} = 0$ (unbounded, $\propto \bar{k}$)
Theoretical $v_{T,\infty} = 0.3162$
Phase velocity $\bar{v}_p = \bar{\omega}/(\pi\bar{k})$
Wavenumber $\bar{k} = kL/\pi$