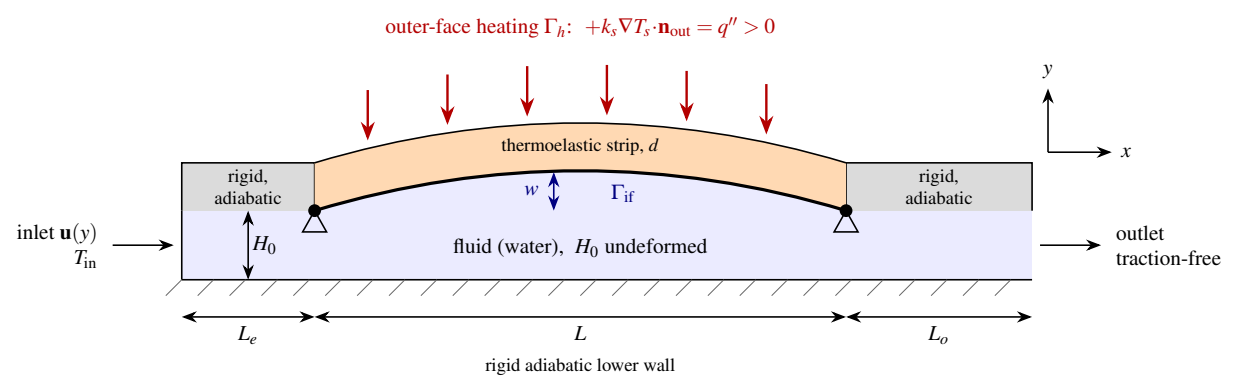

outer-face heating Γ_h: $+k_s \nabla T_s \cdot \mathbf{n}_{\text{out}} = q'' > 0$
y
x
thermoelastic strip, d
rigid, adiabatic
rigid, adiabatic
w
Γ_{if}
inlet $\mathbf{u}(y)$
T_{in}
H_0
fluid (water), H_0 undeformed
outlet
traction-free
L_e
L
L_o
rigid adiabatic lower wall