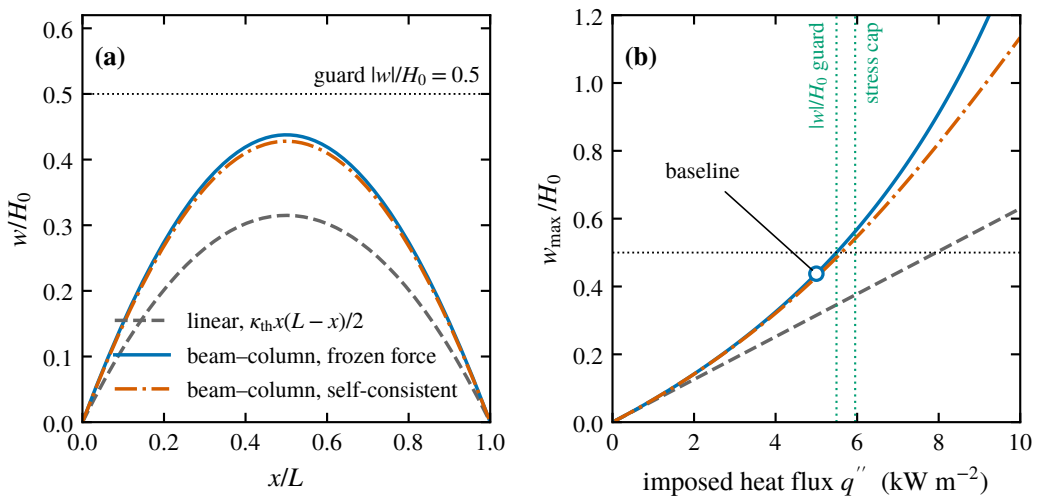
(a)
guard $|w|/H_0 = 0.5$
w/H_0
x/L
linear, $\kappa_{th}x(L-x)/2$
beam–column, frozen force
beam–column, self-consistent
(b)
$|w|/H_0$ guard
stress cap
baseline
w_{max}/H_0
imposed heat flux q'' (kW m^{-2})