







Date: 27/08/2025

Lab Practical #12:


Study the concept of routing using packet tracer. (Static Routing)

Practical Assignment #12:

1. Connect the two different networks based on the calculated IP addresses and subnet using a packet tracer.

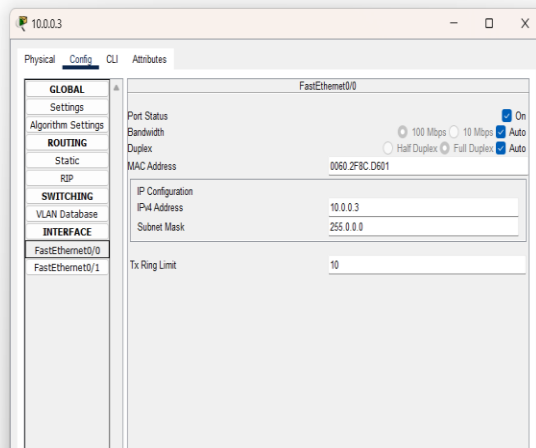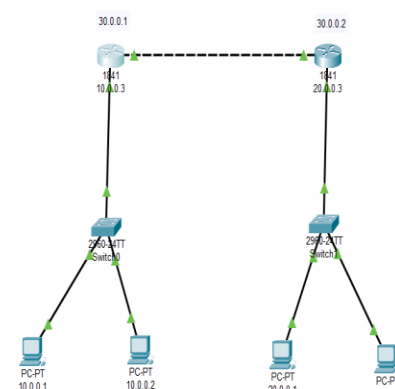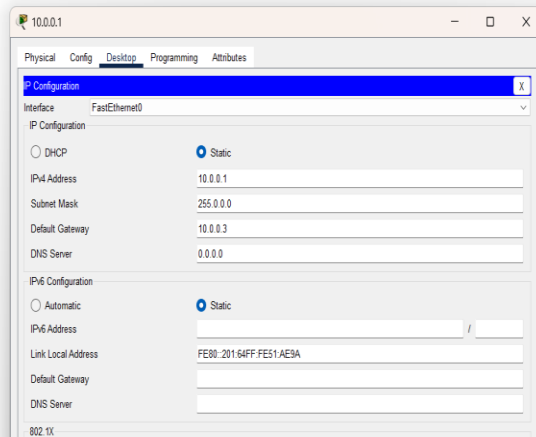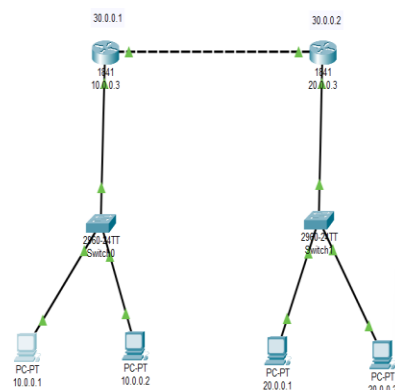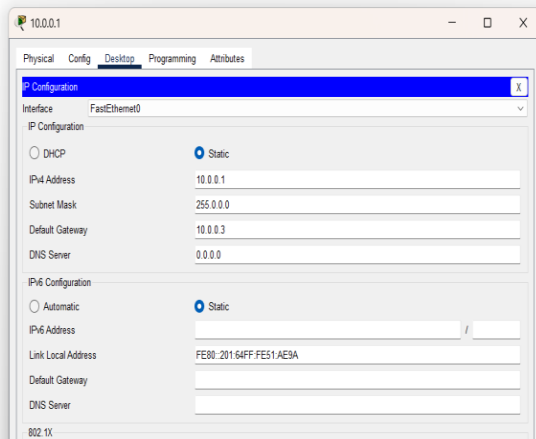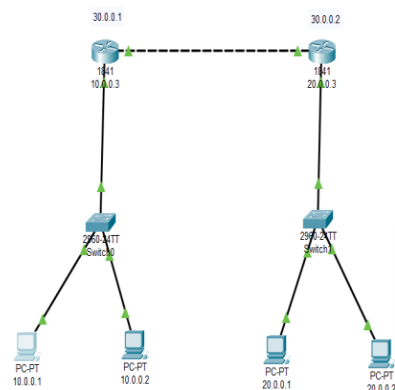

Date: 27/08/2025

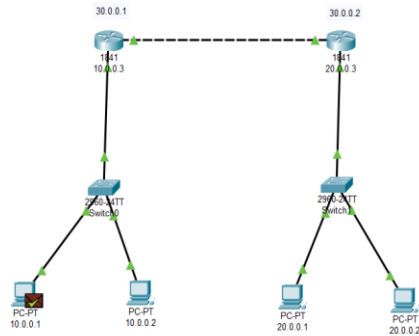


Vis.	Time(sec)	Last Device
0.000	-	-
0.001	10.0.0.1	-
0.002	Switch0	-
0.003	10.0.0.3	-
0.004	20.0.0.3	-
0.005	Switch1	-
0.006	20.0.0.1	-
0.007	Switch1	-
0.008	20.0.0.3	-
0.009	10.0.0.3	-
0.010	Switch0	-

Reset Simulation Constant Delay Captured to: 0.010 s

Play Controls

Event List Filters - Visible Events
ACL Filter, ARP, BGP, Bluetooth, CAPWAP, CDP, EIGRP, HSRP, ICMP, IPsec, L2TP, LLDP, MIB, NTP, RADIUS, RMON, SNMP, STP, Syslog, Telnet, TFTP, VRRP, WPA, WPA2, WPA3, Zabbix

2. Connect the three different networks based on the calculated IP addresses and subnet using a packet tracer.

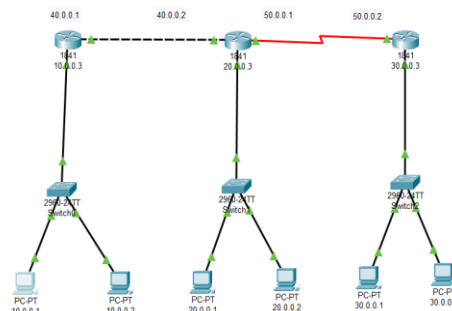

10.0.0.1

Physical Config Desktop Programming Attributes

IP Configuration

Interface FastEthernet0

Static

IPv4 Address 10.0.0.1

Subnet Mask 255.0.0.0

Default Gateway 10.0.0.3

DNS Server 0.0.0.0

IPv6 Configuration

Static


IPv6 Address

Link Local Address FE80::202:4AFF:FEB1:CAE3

Default Gateway

DNS Server

802.1X

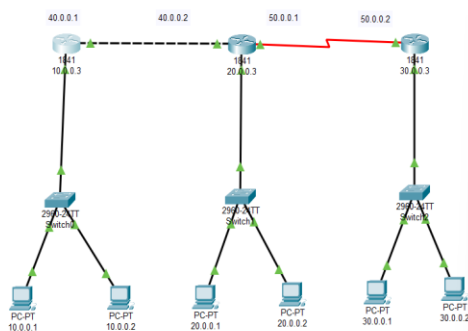

10.0.0.3

Physical Config CLI Attributes

FastEthernet0/0

Port Status On

Bandwidth 100 Mbps

Duplex Full Duplex

MAC Address 08E0.B014.4101


IP Configuration

Static

IPv4 Address 10.0.0.3

Subnet Mask 255.0.0.0

Tx Ring Limit 10

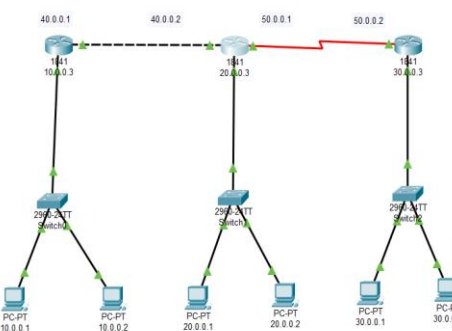

20.0.0.3

Physical Config CLI Attributes

Serial0/0/0

Port Status On

Duplex Full Duplex

Clock Rate 2000000

IP Configuration





Static

IPv4 Address 20.0.0.1

Subnet Mask 255.0.0.0

Tx Ring Limit 10

Date: 27/08/2025

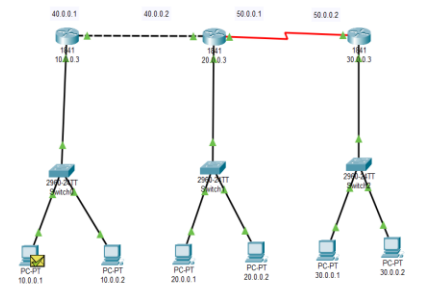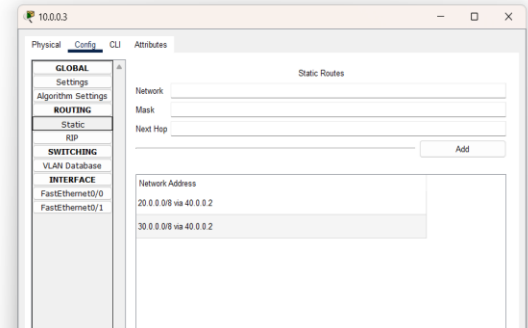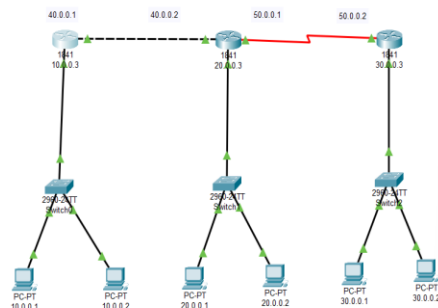

Instructions:

1. Static routing screenshot with routing table. (Take two or more different networks)
2. Mention IP address of each node and network ID of each network as label.
3. Ping command / Packet transfer screenshot between two different network nodes.