Experiment - 9


Subnetting

Aim:-

To design & configure a subnetted network using cisco packet tracker.

Algorithm:-

1) Open cisco packet Tracker
2) Add a router, switch and PCs
3) Connect the devices using suitable cables
4) Open the routes CLI
5) Configure the routes interfaces with IP addresses and subnet masks.
6) Enable the interfaces using no shutdown.
7) Configure the IP address & subnet mask of each PC.
8) Set the appropriate default gateway for each PC.
9) Use the ping command to test connectivity
10) Verify communication between the different subnets.

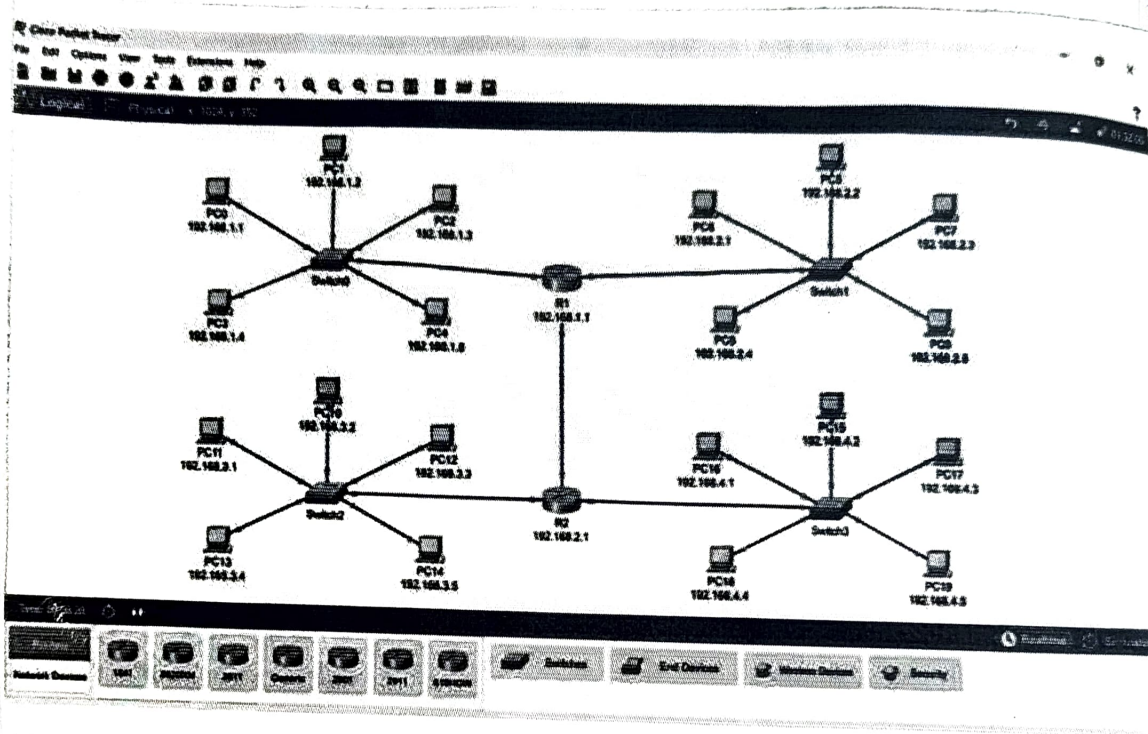

Result :-

Thus, the subnetted network was successfully configured and connectivity was verified using ping.