
Ex #11 a)


Static Routing


Aim: To configure static routing using Cisco Packet tracer.

Algorithm:

1. open the cisco packet tracer
2. Create the required router and pc topology
3. Connect the devices using suitable cables
4. Assign Ip addresses to Pcs and rout
5. Enable router interfaces using no shutdo -wn
6. Configure static routers using Ip route.
7. Check the routing table using show Ip route.
8. Test connectivity using
9. Verify communication between the networks.

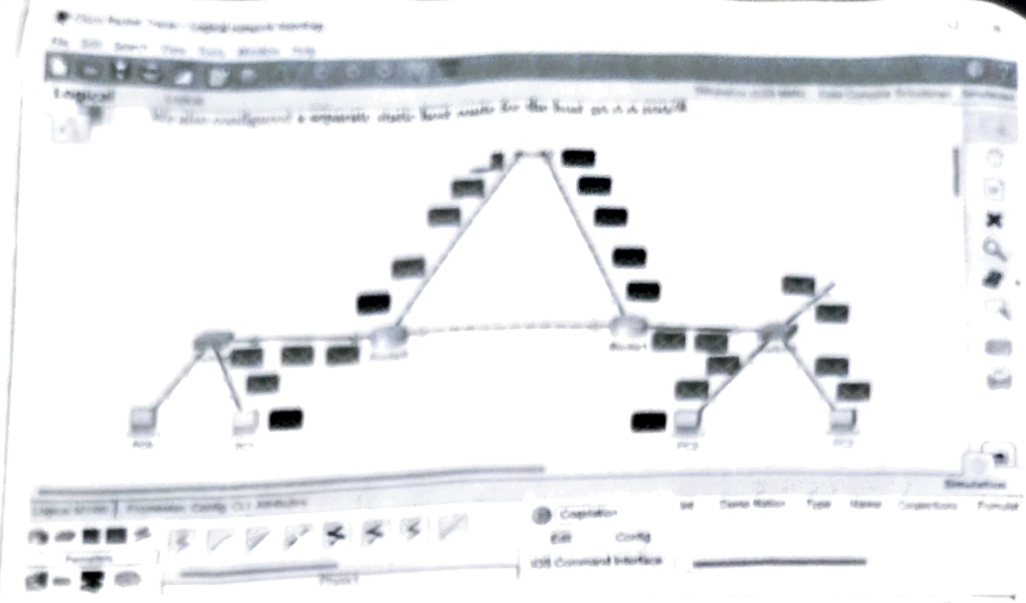

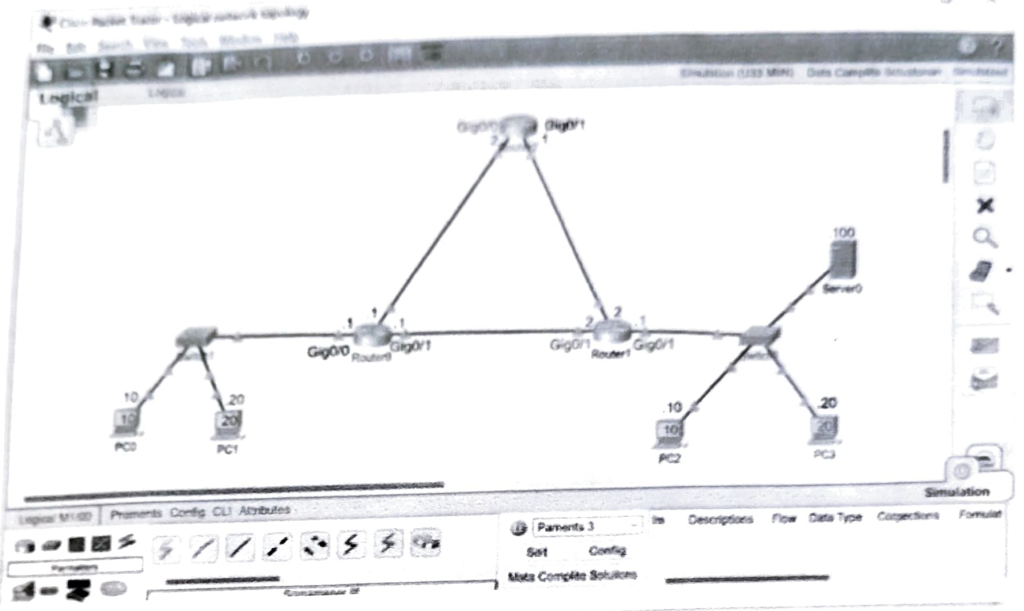

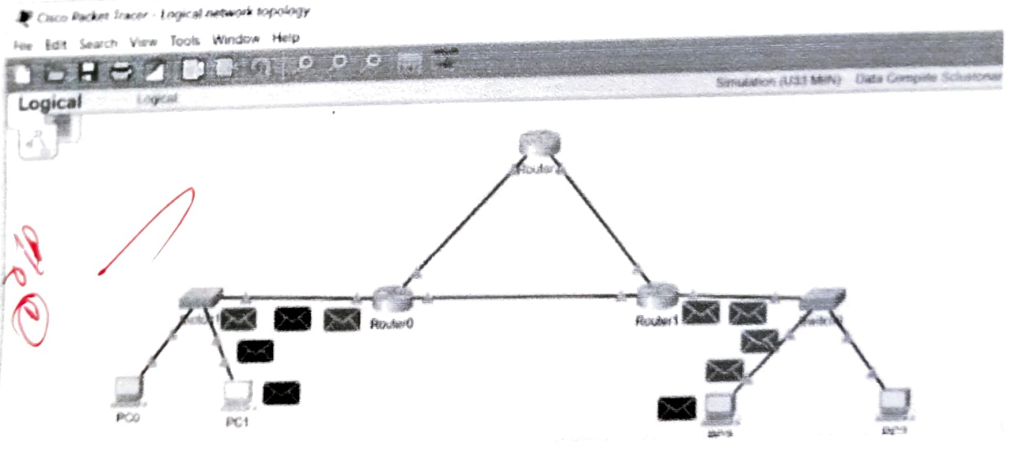

Result:

Thus, the echo client server was successfully implemented using sockets.