Ex 8b)

configuration of wireless LAN using cisco packet tracker

Aim:

To configure a LAN using cisco packet tracker by connecting three pcs to a Linksys wireless router, assigning static IP address, config.

Algorithm:

1) open cisco packet tracker & place wireless router
2) Configure the router with SSID mother Network and WEP security.
3) Set the static IP address of the PCs are 192.168.0.2, 192.168.0.3, 192.168.0.4
4) Configure subnet mask as 255.255.255.0 & gateway as 192.168.0.1
5) Connect all pcs to the wireless network using the WEP key 0123456789.
6) use ping command to test connectivity
7) verify that all ping request. Servis replies with 0% packet loss.

Send Packet

From:

computer4

To:

computer4


Packet Type:

arp_request

Data:

computer6

Send Packet

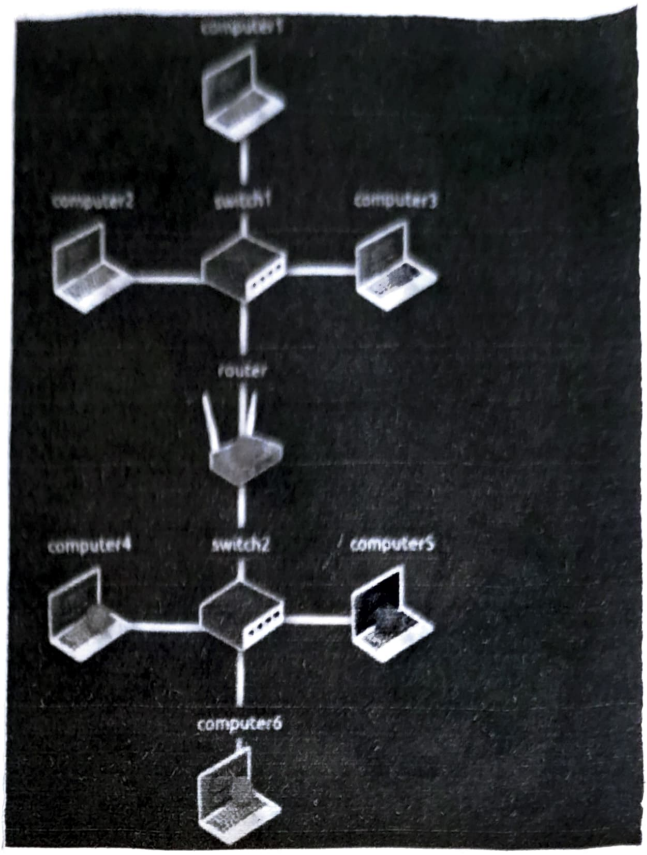

	ISO/OSI	TCP/IP	
7	Application Layer	Application Layer	HTTP, HTTPS, SMTP, POP3, IMAP, SSH, FTP, SNMP, Telnet, RDP,...
6	Presentation Layer		
5	Session Layer		
4	Transport Layer	Transport Layer	TCP, UDP
3	Network Layer	Network Layer	IPv4, IPv6, ICMP, IPsec
2	Data Link Layer	Link Layer	ARP, Ethernet (802.3), WiFi (802.11), DSL, Bluetooth,
1	Physical Layer		

Result:

The LAN using Cisco packet tracker by Connecting three pcs is configured.