


WORK ORDER

Customer :	Test Customer	Input Info:	6/26/2026
Reference :	test 800x1200	SupplyAndFit	
Job No :	88	Page 1	Print Info: 6/26/2026

Main Options	
Colour (External)	White [SP]
Colour (Internal)	White [SP]
Frame (Standard) (Top)	SPQ-5-10252 64mm 5 Chamber
Frame (Standard) (Bottom)	SPQ-5-10252 64mm 5 Chamber
Frame (Standard) (Left)	SPQ-5-10252 64mm 5 Chamber
Frame (Standard) (Right)	SPQ-5-10252 64mm 5 Chamber
Transom	SPQ-05-20252/SPQ-005-30252 67mm
Joint (Structural T/Z) (Transom)	Welded (Standard)
Bead	28mm
Sash Type	Casement top hung left hand
Locking (Casement)	Espag Locking
Handle (Casement)	White Inline Handle
Hinge (Casement) (S/H)	Standard
Hinge (Casement) (T/H)	Standard
Glass Display Group	Standard
Glazing Method	Glazed
Glass Type	4-20-4 Clear Low E
Glass Gas Fill	Argon
Component Type	Glass
Drainage	Concealed Drainage
Location	Please Specify
Vertical Split Position	By Dimensions

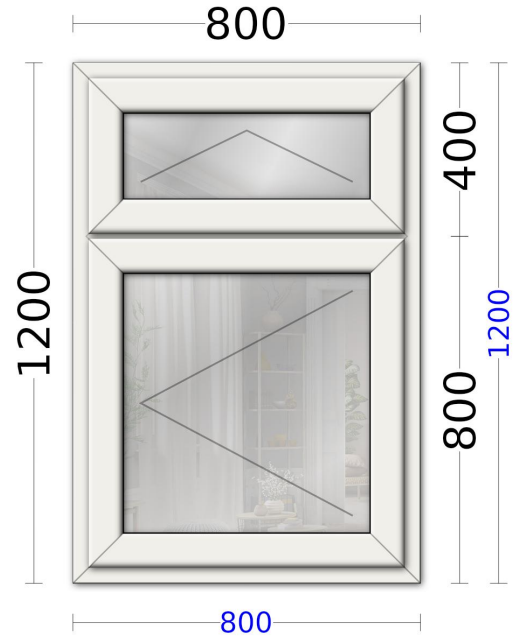

Sections Required:			Qty	Length	End Prep	Reinforcing	Length
Hor	Bead	28mm Bead	4	610	[-]		
Vert	Bead	28mm Bead	2	240.5	[-]		
Vert	Bead	28mm Bead	2	640.5	[-]		
Hor	Frame	Frame 5 Chamber	2	800	\ - /		
Vert	Frame	Frame 5 Chamber	2	1200	\ - /		
Hor	Frame	Chasement T Sash	1	806	< - >		
Hor	Sash	T Sash	4	728	\ - /	28 x 24 Steel Reinforcement	570
Vert	Sash	T Sash	2	358.5	\ - /	28 x 24 Steel Reinforcement	200.5
Hor	Sash	28 x 24 Steel Reinforcement	4	570	[-]		
Vert	Sash	28 x 24 Steel Reinforcement	2	200.5	[-]		
Vert	Sash	T Sash	2	758.5	\ - /	28 x 24 Steel Reinforcement	600.5
Vert	Sash	28 x 24 Steel Reinforcement	2	600.5	[-]		

Accessories Required:	Qty	Unit Of Measurement
Mushroom Striker	4	Unit
Run Up Block	3	Unit
Gasket 01	10292	Metres
White Inline Handle	2	Unit
600mm Espagnolette	2	Unit
8" Friction Hinge	1	Unit
Gasket 02	4178	Metres
Glazing Bridge Packer	16	Unit
16" Friction Hinge	1	Unit

Glass Required:	Qty	Width	Length
01 (Frame-01) 4-20-4 Clear Low E : Thermal Spacer Bar	1	607	238
02 (Frame-01) 4-20-4 Clear Low E : Thermal Spacer Bar	1	607	638