STONE WASH GREY / STYLE 07

Product overview, construction intent, and reference angles



FRONT / UD MONOGRAM



LEFT SIDE / NO TEXT



RIGHT SIDE / SMALL SLOGAN



BACK / ADJUSTER

DESIGN INTENT

- Colour: stone-wash charcoal grey with high/low fading and a soft vintage hand feel.
- Front: original UD monogram, embroidered in a restrained off-white thread weight.
- Right side: small two-line text: SAME ENERGY / DIFFERENT PHASE.
- Left side: no words, no star, no extra emblem.
- Back: plain distressed fabric and adjustable antique-brass-look metal buckle; no slogan.
- Distressing: irregular frays at selected crown panels and brim edge; placement varies slightly by piece.

REFERENCE DETAILS



Front embroidery

Original UD mark; satin/column stitches; keep serif terminals crisp.



Right-side lettering

Small two-line embroidery, approximately 4 mm cap height per line.



Frayed distressing

Open rips should be stabilized; avoid loose yarns near seams.

MATERIAL PROPOSAL

SHELL

100% cotton twill; target 260-300 GSM.

FINISH

Stone-wash + softener; washed charcoal/grey with visible highs and lows.

VISOR

Pre-curved, layered visor; multiple rows of tonal topstitching; lightly frayed edge.

CLOSURE

Self-fabric adjustable strap with metal buckle; rust-resistant finish requested.

LINING

No full lining assumed; taped crown seams, cotton sweatband and brand label inside.

STATUS

Concept tech pack. Confirm material, fit, and measurements with a physical sample.

MEASUREMENT SPEC / INCHES + CM

Initial adult unisex sample targets - measure after wash and distressing

MEASUREMENT STATUS
Proposed targets inferred from the reference board, not measured factory patterns. Suggested tolerance: +/- 3 mm on hard points and +/- 5 mm on washed fabric dimensions. Approve a sewn sample before bulk production.

POINT OF MEASURE	INCHES	CM	HOW TO MEASURE	NOTES / TARGET
Crown height (front centre)	**4.53**	**11.5**	Bottom edge to top seam at centre	Low-to-mid profile
Front panel width	**6.89**	**17.5**	Straight across front panel, seam to seam	Do not stretch
Brim length	**2.95**	**7.5**	Centre front, crown seam to visor tip	Pre-curved
Back opening width	**2.17**	**5.5**	Inside opening at narrowest adjustable setting	Can vary by buckle position
Closure strap width	**0.71**	**1.8**	Across self-fabric strap	Antique-brass-look buckle
Front logo width	**1.02**	**2.6**	Maximum visible stitched artwork width	Based on reference artwork
Front logo height	**0.71**	**1.8**	Maximum visible stitched artwork height	Keep original proportions
Side text overall arc length	**1.97**	**5.0**	Follow baseline along panel curve	Two lines; small text
Side lettering cap height	**0.16**	**0.4**	Uppercase letter height per line	Tiny satin / running stitch mix
Top button diameter	**0.59**	**1.5**	Across fabric-covered button	Proposed
Eyelet inside diameter	**0.16**	**0.4**	Finished open diameter	Confirm after embroidery
Sweatband width	**1.38**	**3.5**	Visible inside band height	Soft cotton blend
Inside circumference	**22-24**	**56-61**	Measure around interior band	Adjustable adult range target

All dimensions are initial targets. Cap shape changes after stone washing, abrasion, and fraying; pattern maker must build shrinkage allowance and validate adult fit on a fully finished sample.

STITCH OUTLINE / EMBROIDERY MAP

Concept stitch paths for digitizing - redigitize from vector artwork and sew-out

A / FRONT UD MONOGRAM



SCHEMATIC ONLY - TRACE APPROVED LOGO

Satin/column embroidery on the UD letter strokes. Preserve the slender serif shapes; avoid excessive pull compensation.

B / RIGHT SIDE TEXT

SAME ENERGY

DIFFERENT PHASE

TEXT POSITION: RIGHT PANEL ONLY

Two-line satin or running-stitch lettering: SAME ENERGY / DIFFERENT PHASE. Target cap height ~4 mm per line.

C / DISTRESS + EDGE



KEEP DISTRESS RANDOM / CONTROLLED

Distress tears are garment finish, not embroidery. Stabilize backing fabric around tears; do not stitch over loose frays.

DIGITIZING RECOMMENDATIONS - VALIDATE WITH EMBROIDERY VENDOR

ELEMENT	STITCH TYPE	STARTING SETTINGS	THREAD / BACKING	
UD front logo	Satin columns; small running underlay	Density 0.40-0.45 mm; pull comp 0.2-0.3 mm as starting point	Off-white polyester; cutaway or cap backing per machine setup	No merged counters; sample on washed cap
Right-side text	Satin or running + satin, depending font stroke	Minimum stroke width set by digitizer; avoid sub-needle-thin serif strokes	Off-white polyester; hoop/cap frame alignment test	Readability from 0.5 m; correct spelling
Panel seams	No stitching across seam unless required	Place art clear of seam ridge	Tear-away topper may help on textured twill	No puckering or fabric tunneling
Frayed details	Garment distress only; no stitch simulation	Distress after base construction; secure tear ends where needed	Match wash/abrasion to approved swatch	No tear into structural seam or visor insert

INTERIOR CONSTRUCTION / INCH-BY-INCH DETAILS

Interior views are proposed construction details; confirm workmanship, materials, and care labels with supplier

INTERIOR / SOURCE REFERENCE



INTERIOR CONSTRUCTION PROPOSAL

01 / SIX-PANEL SEAMS

Six crown panels joined with double-needle seams; interior seam tape covers raw allowances and reduces skin irritation.

02 / SWEATBAND

Soft cotton or cotton/poly sweatband, target visible width 1.38 in (3.5 cm); securely topstitched at upper and lower edges.

03 / INNER TAPE

Self-fabric or lightweight cotton tape over internal seams; optional tiny repeat cross pattern is NOT required unless approved.

04 / BRAND LABEL

Woven UD label at centre back interior; black base with ivory mark. Care/content label separate if required by market.


05 / VISOR INTERIOR

Pre-curved visor insert enclosed in shell fabric; stitch rows are parallel, even, and secured at both ends.

06 / BACK CLOSURE


Self-fabric strap threaded through metal buckle; reinforce strap anchor seams with bar tacks or dense lock stitches.

CROWN TAPING

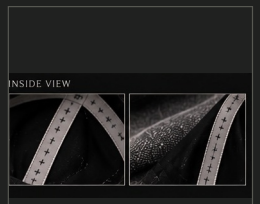

Cover all seam allowances.

SWEATBAND

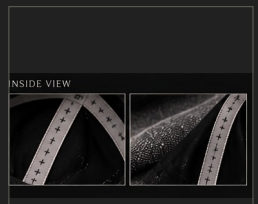

Soft, smooth skin contact.

SHELL FACE



Washed cotton twill.

VISOR STITCH



Parallel rows, secure ends.

METAL BUCKLE



Antique finish; no sharp edges.

STRAP ANCHOR



Reinforced attachment.

CARE LABEL




Specify fibre + care.

Inspection points: no scratchy seam ends; no loose threads inside; sweatband lays flat; buckle edges smooth; strap adjusts without slipping; no distortion after washing.

SEWING OUTLINE / CONSTRUCTION MAP


Simplified technical line diagrams - not a graded factory pattern

FRONT ELEVATION / STITCH ZONES

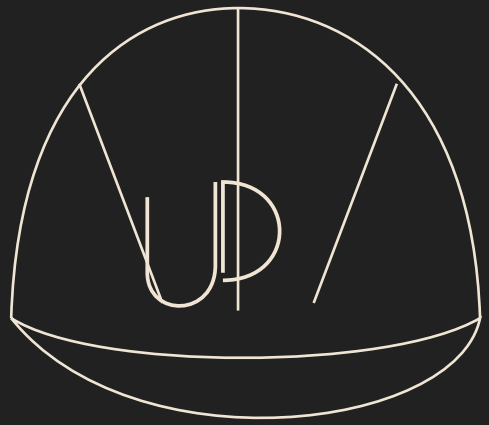


Lines = panel seams / visor edge / logo placement only

RIGHT SIDE / TEXT PLACEMENT

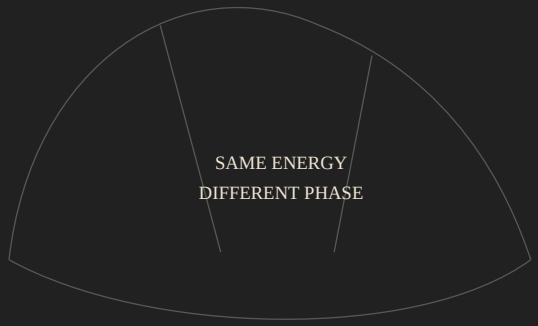

Place text on RIGHT panel only; keep clear of seam

BACK / CLOSURE

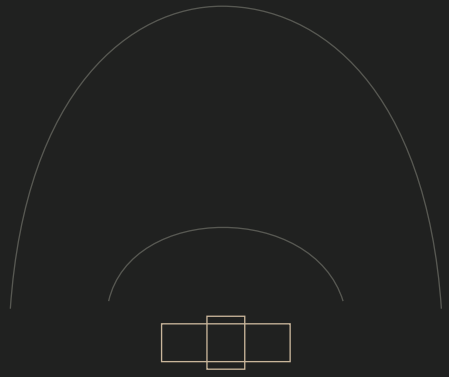

No slogan on back; self-fabric strap + buckle

STITCH-LINE LEGEND AND SEWING ORDER

A	**Crown panel joining**	Overlock/lock seam per factory capability; open/press allowances and cover with seam tape.
B	**Visor attachment**	Secure visor to lower crown; maintain smooth curve; topstitch rows evenly after shaping.
C	**Embroidery order**	Embroidery front panel before crown assembly where possible; sample on washed shell or apply matched wash after sew-out.
D	**Distress order**	Sew base cap first, then controlled abrasion/fraying, then wash and clean loose fibres; QC seam strength.
E	**Final finish**	Install sweatband, seam tape, closure and labels; final steam/shape; inspect embroidery registration and measurements.

BILL OF MATERIALS / QUALITY CHECKLIST

Vendor handoff page - sample first, then confirm final costs and specs

BILL OF MATERIALS / TRIMS

SHELL FABRIC	100% cotton twill, target 260-300 GSM; stone-wash charcoal grey.
VISOR INSERT	Flexible PE or approved visor board; pre-curved adult shape.
THREAD / LOGO	Off-white polyester embroidery thread; reduce logo visual boldness; preserve approved UD geometry.
SIDE TEXT	Off-white thread, tiny 2-line phrase on right side only: SAME ENERGY / DIFFERENT PHASE.
SWEATBAND	Cotton or cotton/poly, soft touch; approx. 1.38 in (3.5 cm) visible width.
SEAM TAPE	Self-fabric or black/grey cotton tape, cleanly finished; inside cross pattern optional and must be approved.
CLOSURE	Self-fabric strap and antique-brass-look metal buckle; 0.71 in (1.8 cm) strap target.
LABELS	UD woven main label inside; country-of-origin/content/care labels as required for target market.
WASH / DISTRESS	Stone wash, softener, localized abrasion and frayed brim; distress location may vary but structural seams must remain sound.

PRE-PRODUCTION QC CHECKLIST

- Approve physical sample in finished washed state before bulk cutting.
- Confirm adult fit, head circumference range, crown depth and brim curve on wearer or fit form.
- Check front UD geometry, thinner logo stitch appearance, placement and alignment to centre front seam.
- Verify the exact right-side phrase spelling and legibility; no text on left side or back.
- No star emblems or additional side symbols in the approved version.
- Check panel seam alignment, eyelet openings, top button, visor stitching row spacing and clean stitch ends.
- Distress holes should be irregular but not weaken main seams, crown structure or visor attachment.
- Interior: no scratchy tape edges, loose threads, exposed seam allowances or rough buckle edges.
- Measure finished washed cap against page 2; record actuals and approved tolerances.
- Wash/rub test for colour transfer, excessive shrinkage, thread breakage and buckle corrosion.

Important: the provided images are concept renders and do not reveal the actual production pattern or stitch-file data. Have a cap pattern maker and embroidery digitizer create final graded patterns and machine-ready files after physical sample approval.