

1)take two Machine




2

2) take one network device route



3) give connection

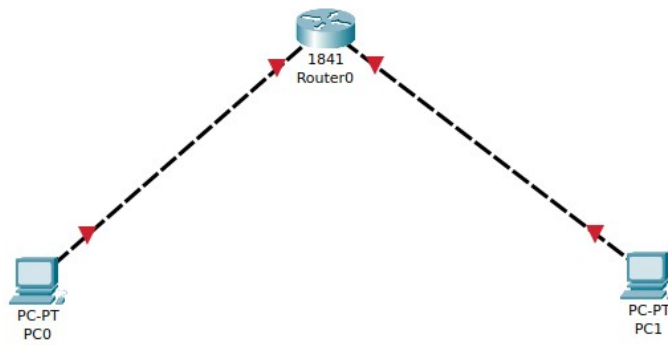

4)
set give ip addrea and default gateways for pc1 and pc2
for pc 1

PC0

Physical **Config** Desktop Programming Attributes

GLOBAL

INTERFACE

FastEthernet0

Bluetooth

Port Status ☒ On

Bandwidth ☒ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex ☐ Half Duplex ☒ Full Duplex ☒ Auto

MAC Address 0060.5CBC.1634

IP Configuration

☐ DHCP

☒ Static

IPv4 Address 192.168.1.2

Subnet Mask 255.255.255.0

IPv6 Configuration


☐ Automatic

☒ Static

IPv6 Address

Link Local Address: FE80::260:5CFF:FEBC:1634

for pc2

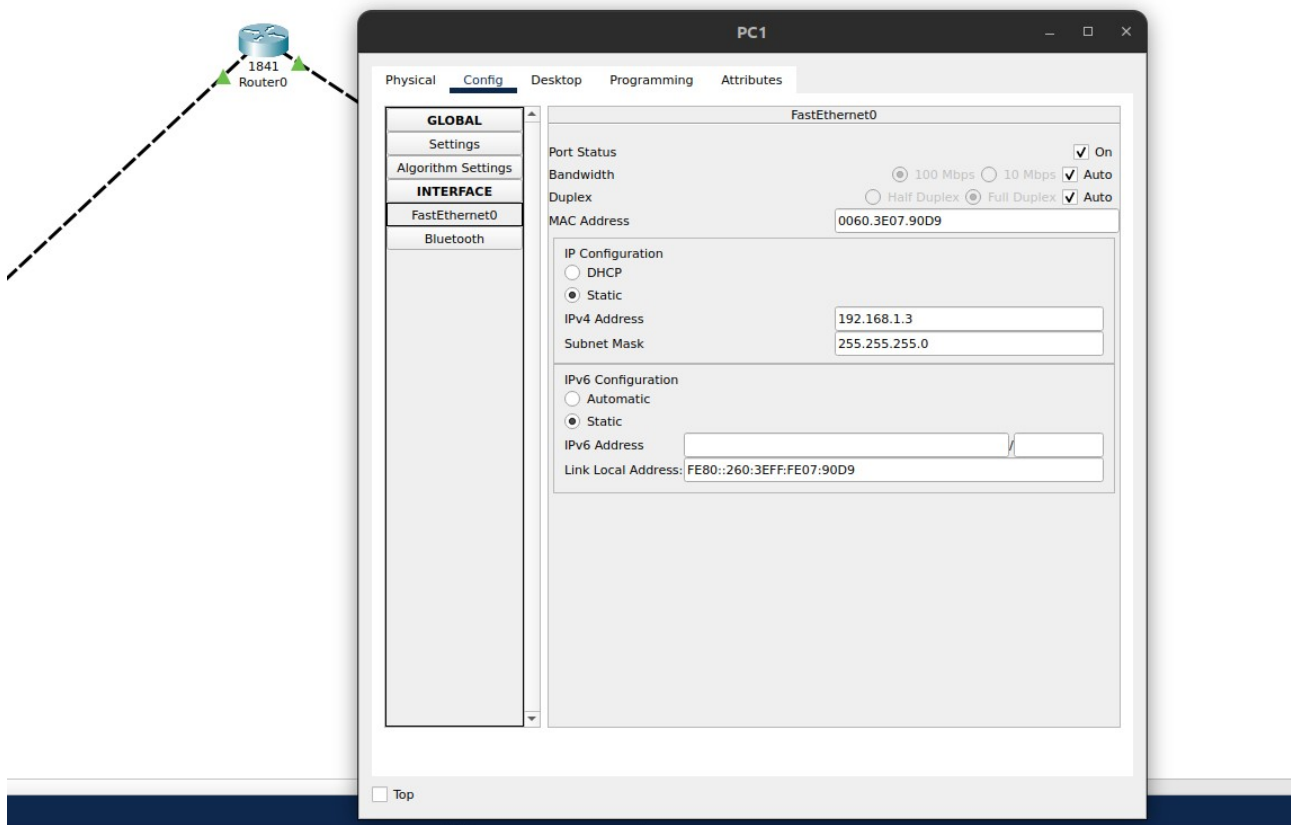

also set router from console

```
Router(config-if)#interface fa0/1
Router(config-if)#ip address 192.168.1.2 192.168.1.1
Bad mask 0xC0A80101 for address 192.168.1.2
Router(config-if)#no shutdown
```

```
Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up
```

```
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
```

```
Router(config-if)#
Router(config-if)#interface fa0/0
Router(config-if)#ip address 192.168.1.2 192.168.1.1
Bad mask 0xC0A80101 for address 192.168.1.2
Router(config-if)#no shutdown
```

Successful PC1 PC1 IC... 0.000 N 1 (e... (delete)