




Temperature measurement

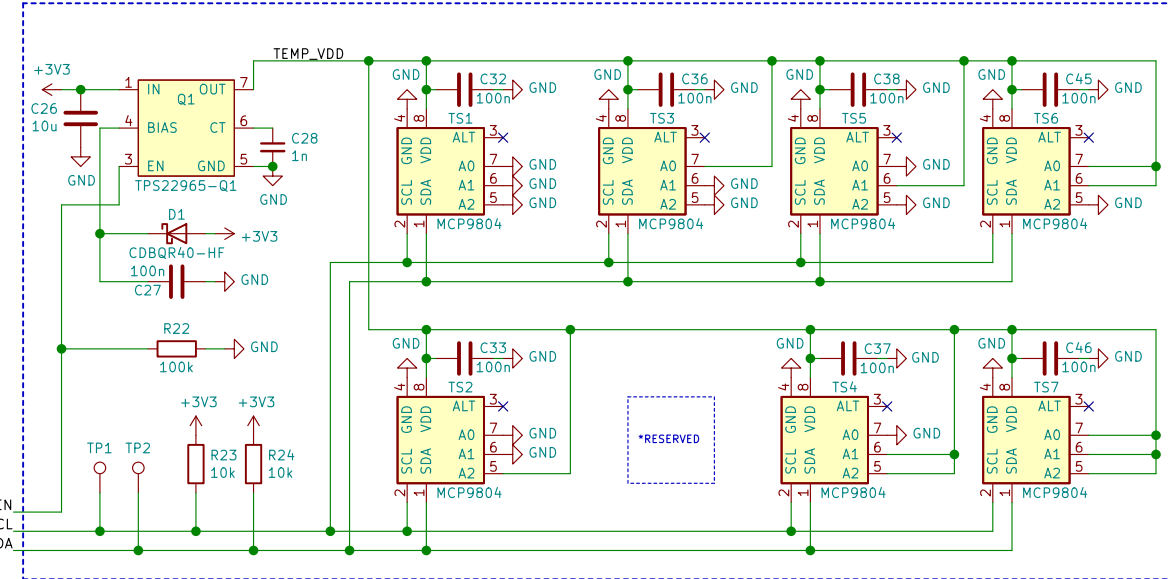


GLOBAL & CPU Isolators

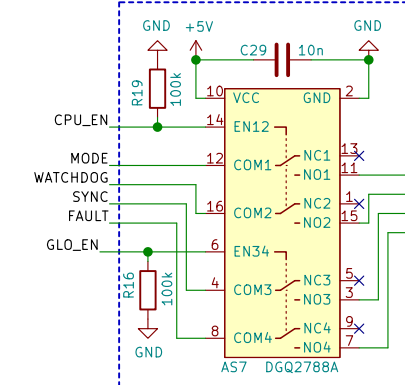


Triple redundant FLASH memory

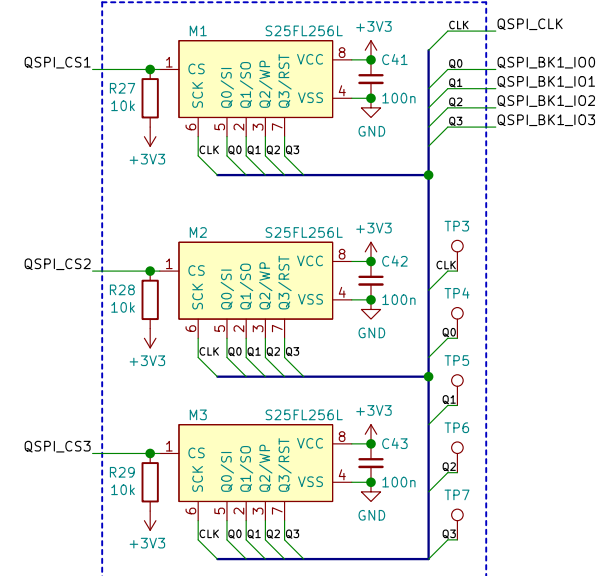


CAN & I2C Isolators

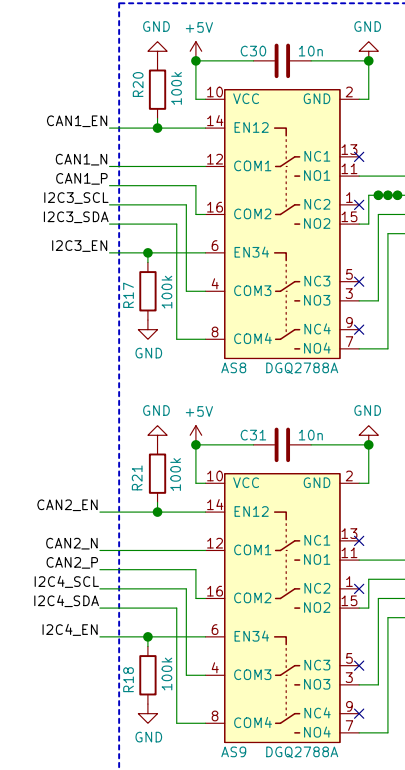


Triple redundant F-RAM memory

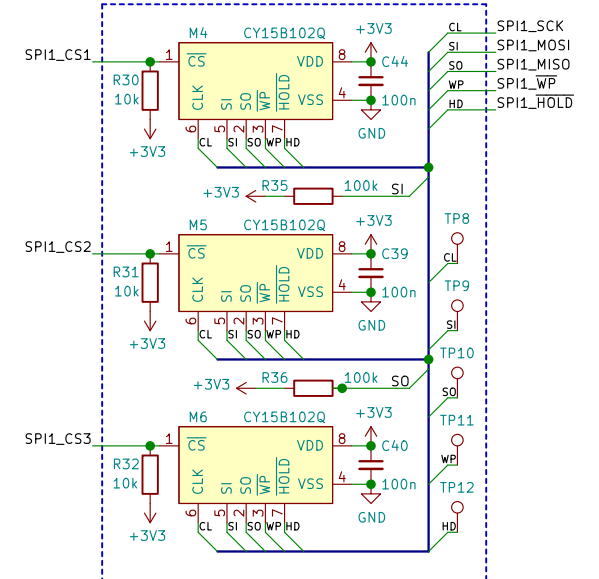


Power UV, OV, current protection and KillSwitch

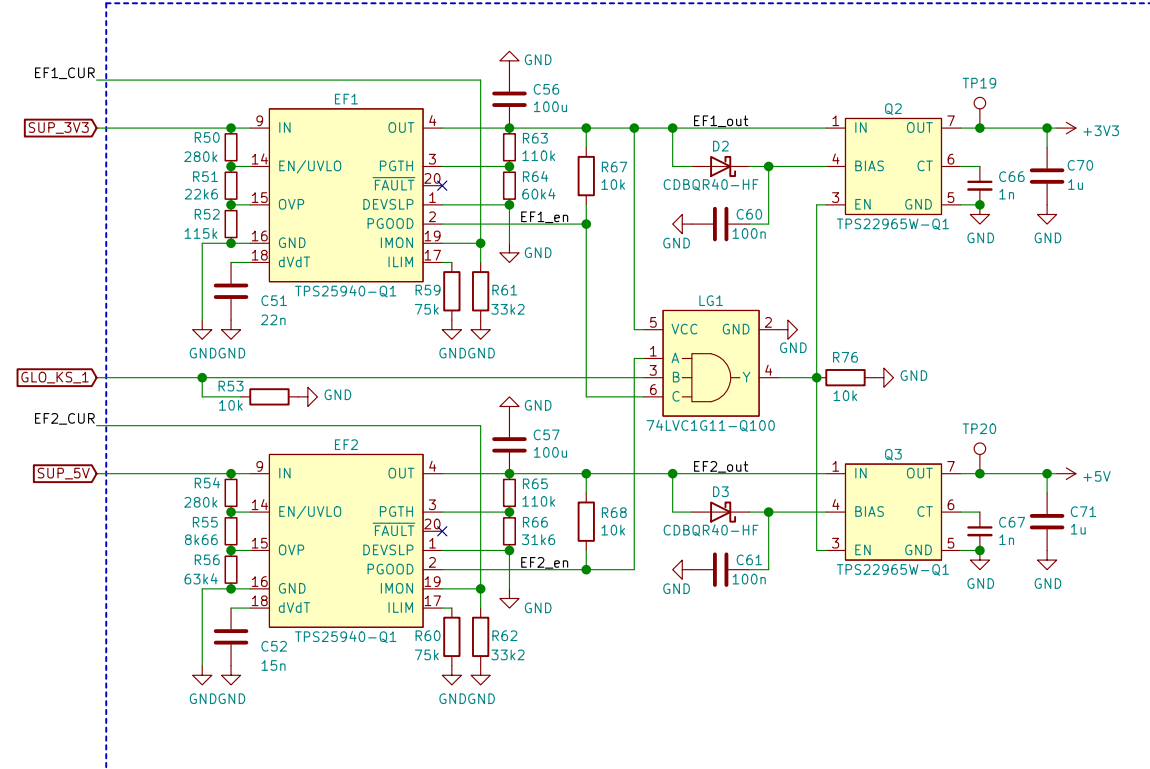


CAN FD transceiver

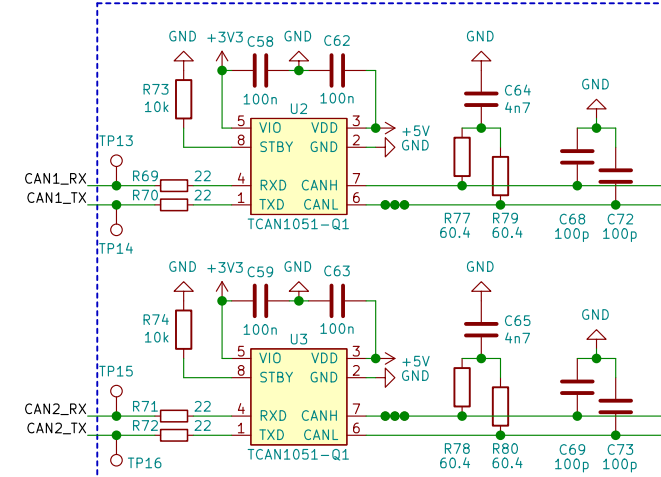


I2C 1 & 2 pull-up




LSE and HSE clock sources

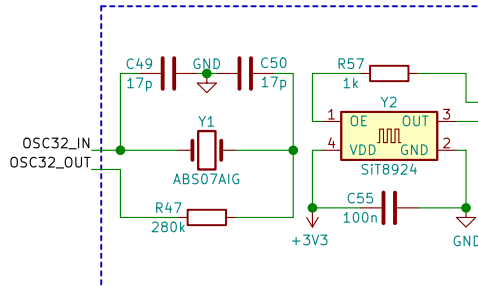


SW & UART peripheral with ESD protection

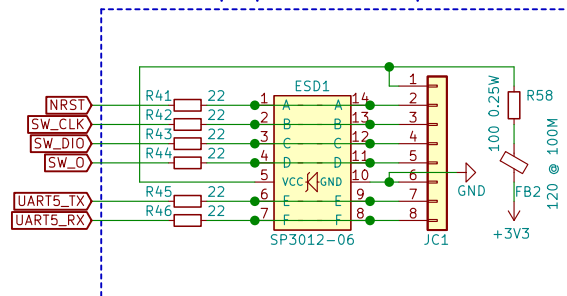


LibreCube main headers

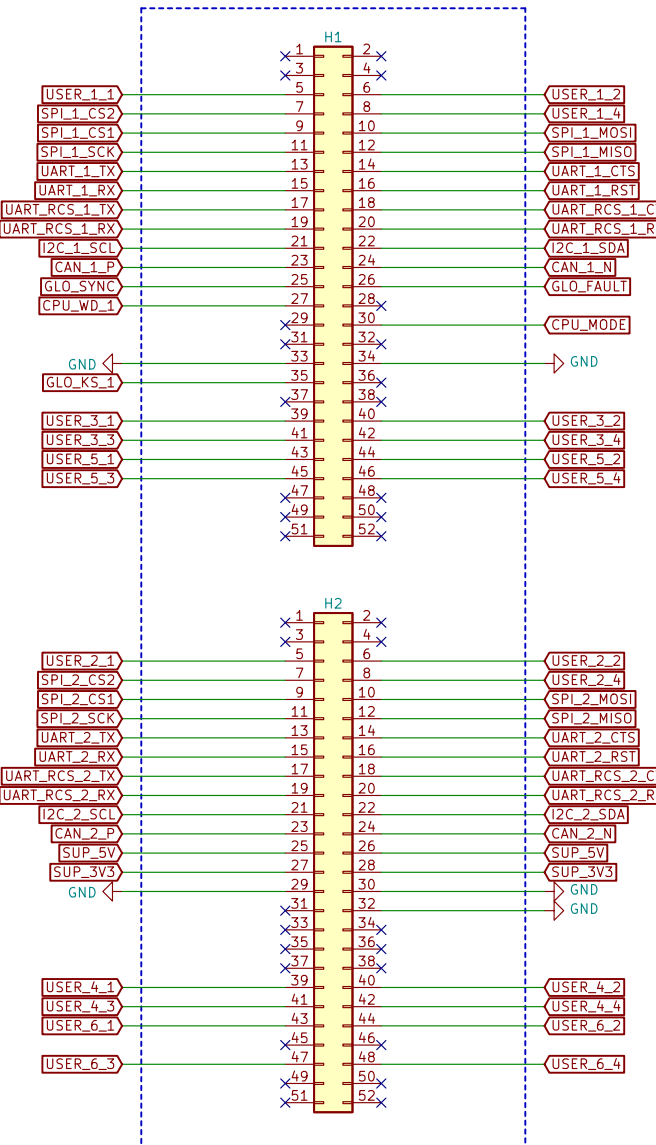


USER 1&2 Isolators

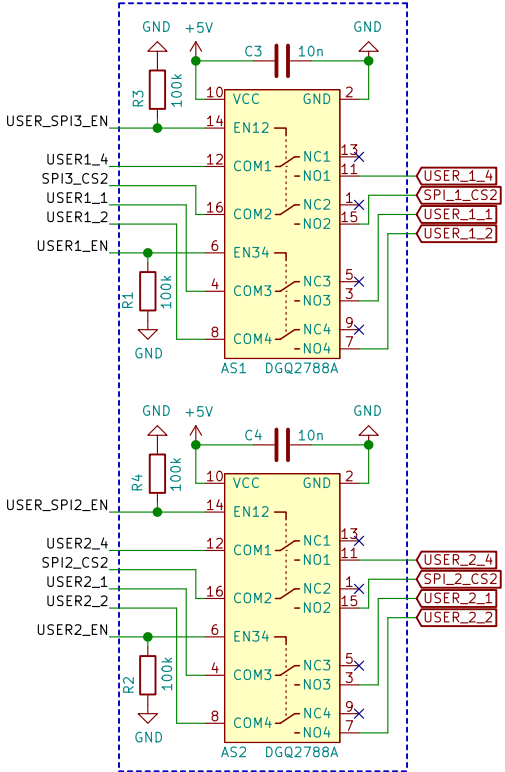


USER 3&4 Isolators - 3V3 tol.

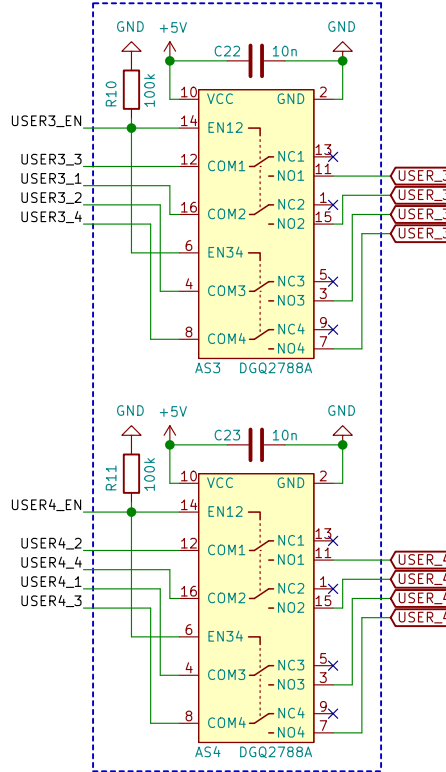


USER 5&6 Isolators

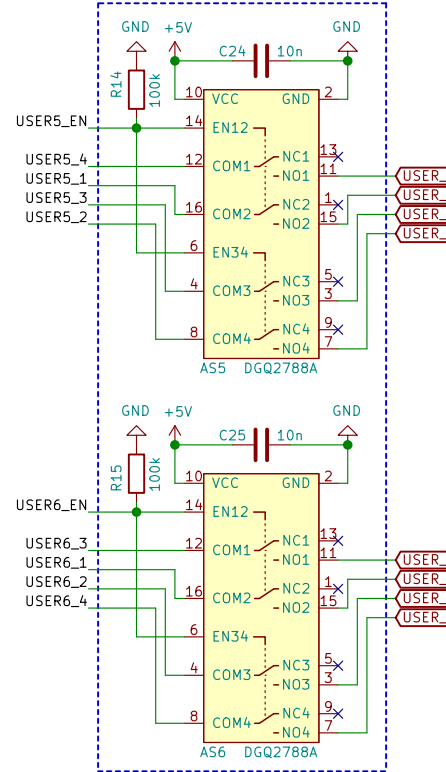

SPI Isolators

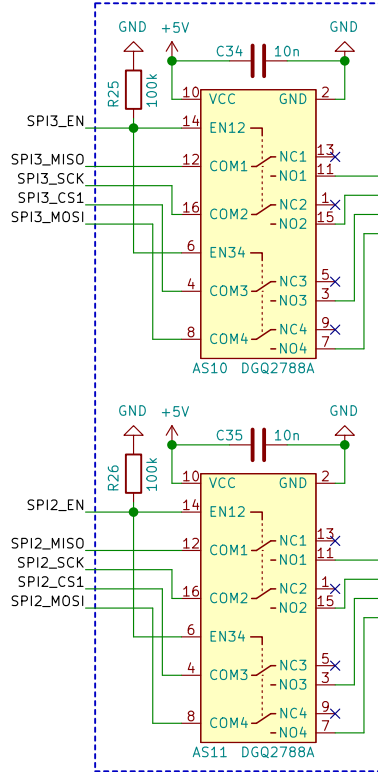

RCS UART Isolators

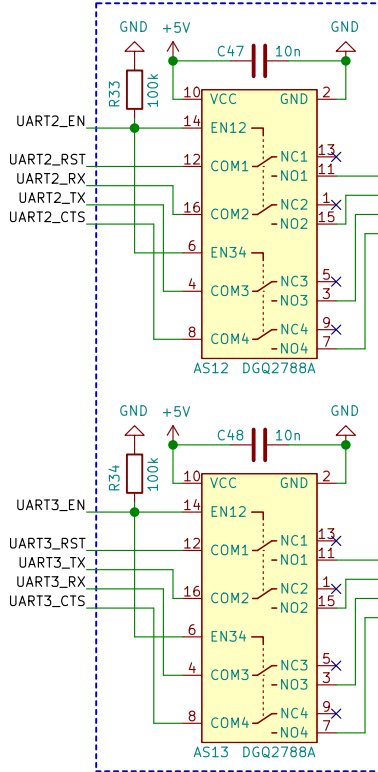

UART Isolators

