NEW: Pavo20 Pro II Brushless Whoop Quadcopter is HERE! Buy Now





Home /

LAVA II 1S Battery

4.5 ★★★★½ 44 reviews

$28.54

SPIN TO WIN

CAPACITY

NEW: Pavo20 Pro II Brushless Whoop Quadcopter is HERE! Buy Now

More payment options

Experience a generational leap in power and performance with the LAVA II 1S Battery. This next generation leverages an advanced core material upgrade to unlock 5.5%-7.7% more capacity and a remarkable 95C discharge rate, generating a massive 27.9%-35.1% current boost for incredibly responsive and consistent power. The legacy of the Z-folding process ensures superior energy density and long-term reliability. With an expanded range of five capacities, from 280mAh to the new 680mAh, the LAVA II provides precise power for any application.



Bullet Points

- Unmatched Power & Endurance: Experience a 27.9%-35.1% current boost and longer flight times, driven by a 26.7% increase in discharge rate (95C) and acity within the same compact form factor.
  Technology: Leveraging our proprietary Z-Folding process, the LAVA II achieves a 5% higher energy density and significantly extended

NEW: Pavo20 Pro II Brushless Whoop Quadcopter is HERE! Buy Now

Radio Controllers

BETAFPV BETAFPV FPV Gear

Parts & Spares

Explore Support

	280mAh Battery	320mAh Battery	480mAh Battery	580mAh Battery	680mAh Battery
Capacity	280mAh	320mAh	480mAh	580mAh	680mAh
Weight (g)	6.8	8.2	12.6	14.1	16.2
Dimensions (mm)	54*10*6	64*10*6	61*15.5*6	70*15*6.5	80*15*6.5
Power	1.06Wh	1.22Wh	1.82Wh	2.20Wh	2.58Wh
Compatible Whoops	Air65 II, Meteor65 Pro O4, Air65, Meteor65 Pro, Cetus		Air75 II, Meteor75 Pro O4, Air75, Meteor75 Pro, Cetus Pro, Cetus X		Air75, Meteor75 Pro
C-rate	95C				
Max Voltage	4.35V				
Storage Voltage	3.85V				
Battery Type	LiHV				
Connector	BT2.0				

Dimensions

LAVA II 1S 280mAh shown below for reference:


NEW: Pavo20 Pro II Brushless Whoop Quadcopter is HERE! Buy Now



LAVA 1S Battery vs. LAVA II 1S Battery

Through a core material upgrade, LAVA II 1S Battery unlocks a formidable 95C discharge rate—a 26.7% increase over the previous 75C—delivering a massive boost in available power. This translates into a 0.1V higher and significantly more stable discharge voltage, providing unwavering consistency for peak performance.

Discharge curve of LAVA II 1S 280mAh Battery:

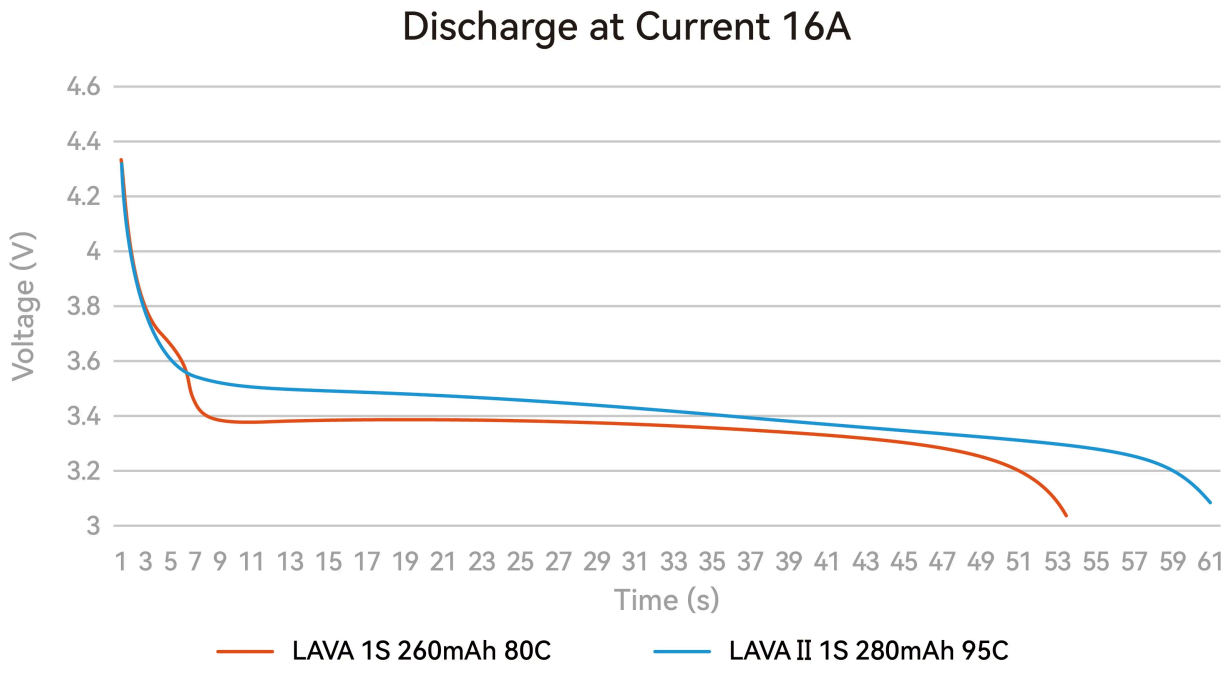

Discharge curve of LAVA II 1S 320mAh Battery:


NEW: Pavo20 Pro II Brushless Whoop Quadcopter is HERE! Buy Now

Radio Controllers


BETAFPV BETAFPV FPV Gear

Parts & Spares

Explore Support

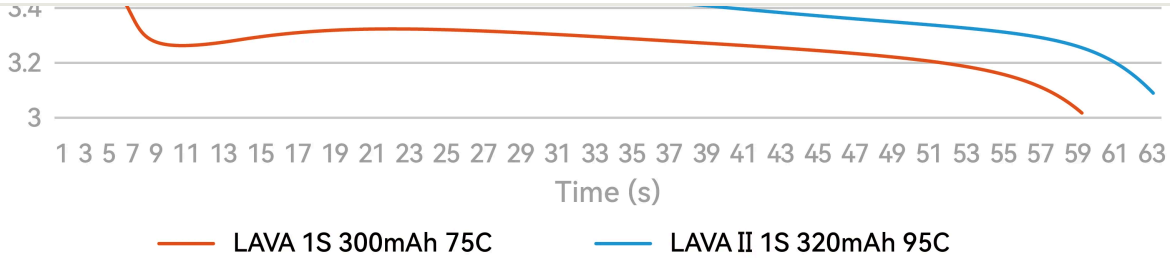

Discharge curve of LAVA II 1S 480mAh Battery:

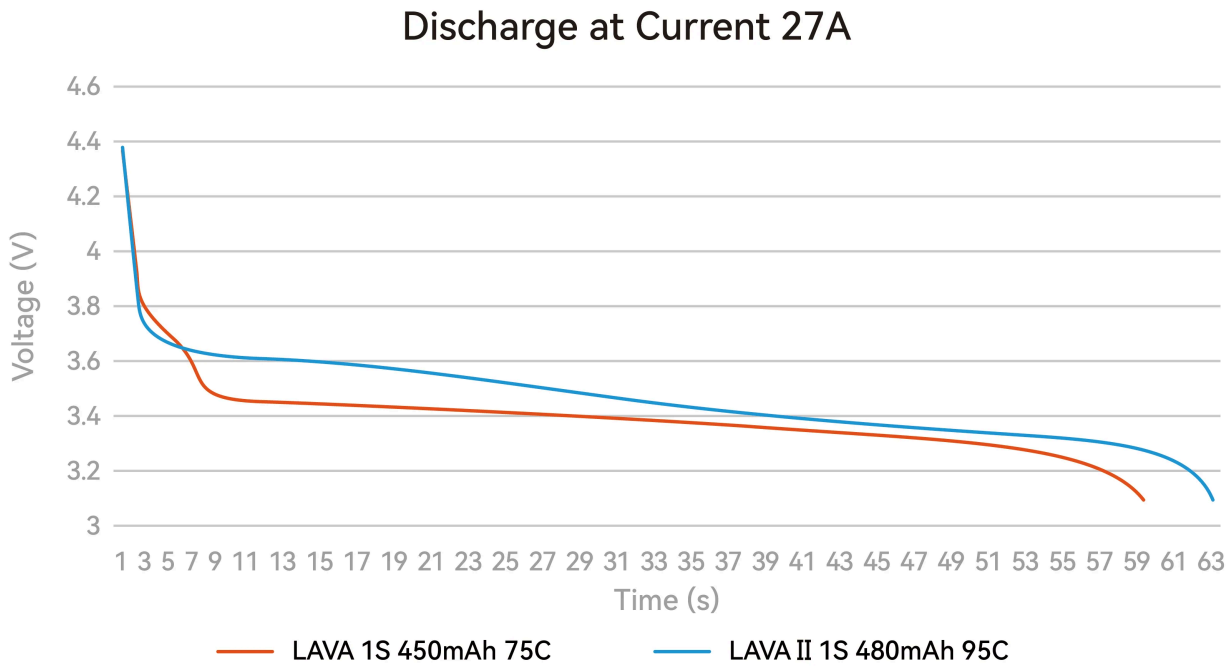

Discharge curve of LAVA II 1S 580mAh Battery:


NEW: Pavo20 Pro II Brushless Whoop Quadcopter is HERE! Buy Now

Radio Controllers


BETAFPV BETAFPV FPV Gear

Parts & Spares

Explore Support

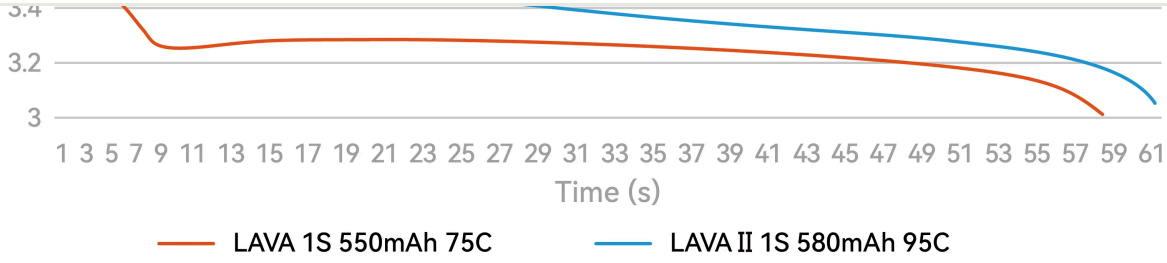

Discharge curve of LAVA II 1S 680mAh Battery:

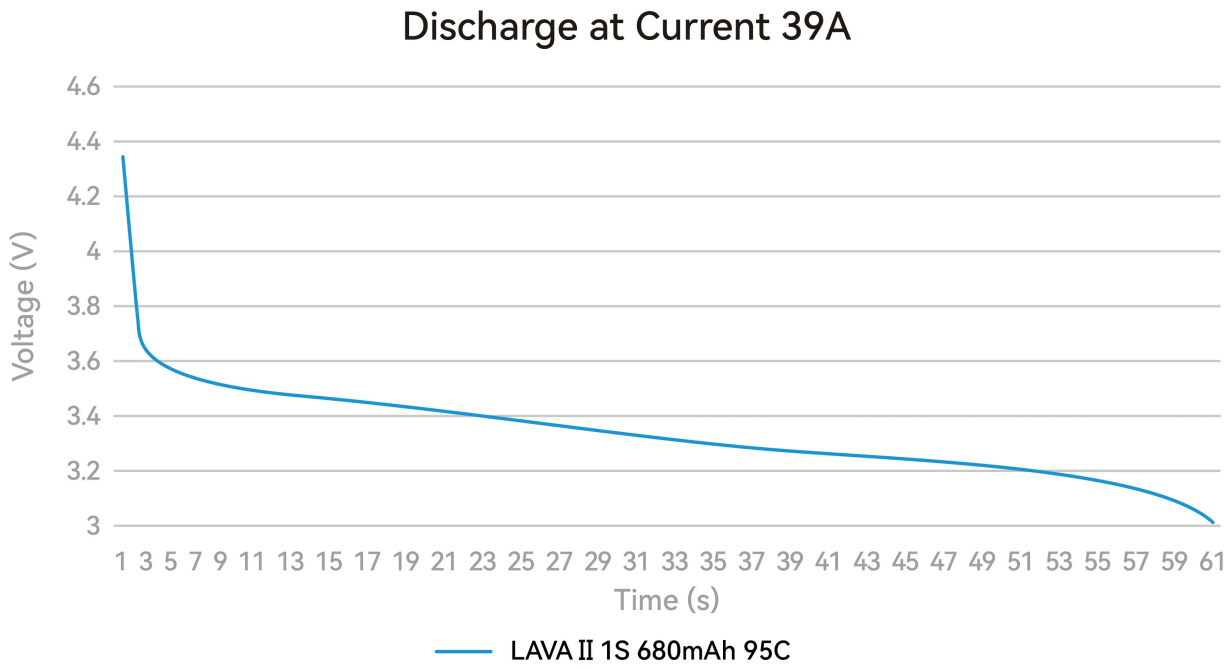

The chart below compares the key specifications of the LAVA 1S and LAVA II 1S batteries:

	Dimensions (mm)	Weight (g)	Capacity	Power	C-Rate
	0*6	6.8	280mAh	1.06Wh	95C

NEW: Pavo20 Pro II Brushless Whoop Quadcopter is HERE! Buy Now

Radio Controllers

BETAFPV BETAFPV FPV Gear

Parts & Spares


Explore Support

LAVA II 1S 480mAh 95C	61*15.5*6	12.6	480mAh	1.82Wh	95C
LAVA 1S 450mAh 75C	61*15.5*6	12.5	450mAh	1.71Wh	75C
LAVA II 1S 580mAh 95C	70*15*6.5	14.1	580mAh	2.20Wh	95C
LAVA 1S 550mAh 75C	67.5*15*7	14.3	550mAh	2.09Wh	75C
LAVA II 1S 680mAh 95C	80*15*6.5	16.2	680mAh	2.58Wh	95C

Z-Folding Process

The Z-Folding process delivers a superior performance advantage, leveraging its low internal resistance to enable efficient high-current discharge and a 0.2V higher voltage under load compared to wound cells, ensuring consistent and robust power. This architecture also achieves a 5% higher energy density within the same volume and a significantly extended cycle life. Furthermore, it provides unparalleled design freedom, allowing for precise customization of the battery's size and shape to meet specific application requirements, offering broader versatility than traditional winding methods.

NEW: Pavo20 Pro II Brushless Whoop Quadcopter is HERE! Buy Now

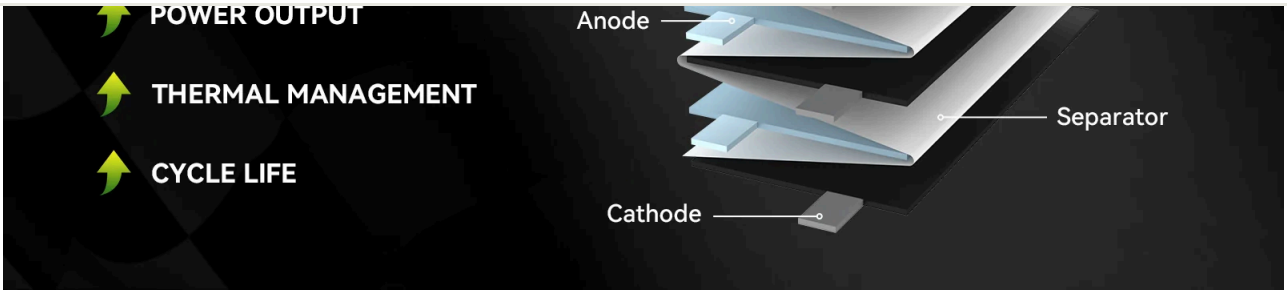

Warning

- Please fully charge the new battery before use.
- Only use a charger designed for lithium polymer/Li-ion battery, and never leave the battery unattended during the charging process.
- Always keep the battery away from flammable and explosive materials while charging.
- Never overcharge the battery. The maximum voltage for a LiPo battery is 4.2V per cell, and for a LiHV battery is 4.35V per cell.
- Never discharge the battery to a level below 3V per cell under load.
- Do not store fully charged batteries for more than 3 days. For long-term storage, maintain the voltage between 3.8V and 3.9V.
- Do not disassemble, crush, short circuit, or expose to flame or other sources of ignition.
- Do not use batteries that are deformed or swollen.

Recommended Parts

- Quadcopter: Air65 II, Air65, Meteor65 Pro, Meteor65 Pro O4, Cetus (LAVA II 1S 280mAh / 320mAh 95C Battery)
- Quadcopter: Air75 II, Air75, Metor75 Pro, Meteor75 Pro O4, Cetus Pro, Cetus X (LAVA II 1S 480mAh / 580mAh 95C Battery)
- Quadcopter: Air75, Metor75 Pro (LAVA II 1S 680mAh 95C Battery)
- Charger: HexaCharger, 6 Ports 1S Battery Charger & Adapter, BT2.0 Battery Charger and Voltage Tester V2

LAVA II 1S 280mAh / 320mAh 95C Battery

NEW: Pavo20 Pro II Brushless Whoop Quadcopter is HERE! Buy Now



LAVA II 1S 480mAh / 580mAh / 680mAh 95C Battery

- 4 * LAVA II 1S 480mAh / 580mAh / 680mAh 95C Battery (480mAh package shown below for reference)