LE18.3

LE18.3.1: Weak Priorities

0.0/1.0 point (ungraded)

A real-time operating system with priority interrupts has three interrupt handlers (A, B, C), each of which, when invoked by the appropriate interrupt request (marked as ↑ in the execution timelines), takes 11 time units to execute. For example, the following execution timeline shows the A handler running to completion after an A interrupt request, followed by execution of the B handler, which is itself interrupted by execution of the C handler.

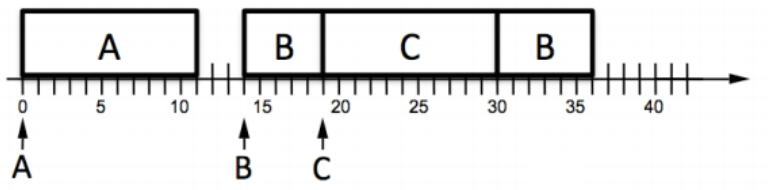

Another way of representing this execution timeline is using a table like the one below:

Interval start time	Interval end time	Device
0	11	A
11	14	NONE
14	19	B
19	30	C
30	36	B
36	40	NONE
NONE	NONE	NONE

Note that the intervals begin at time 0 and end at time 40. Make sure to include this full time range in your answers. If no handler is running in a particular interval, then NONE should be entered as the device name. All intervals are consecutive such that the end time of one interval is the start time of the next interval. If there are unused rows in the table, then NONE should be entered for all three fields.

For the following question, assume that the interrupt requests arrive as shown in the execution timeline below.



Specify the execution times of the A, B, and C handlers assuming a **weak** priority system with the priorities C > B > A. Fill in the table below using the same conventions as the sample table shown above. Remember to show the complete execution (all 11 time units) for each handler.

Weak priority execution timeline:

Interval start time	Interval end time	Device
0	11	A
	Answer: 11	Answer: A
11	22	C
Answer: 11	Answer: 22	Answer: C
22	33	B
Answer: 22	Answer: 33	Answer: B
33	40	NONE
Answer: 33	Answer: 40	Answer: NONE
NONE	NONE	NONE
Answer: NONE	Answer: NONE	Answer: NONE
NONE	NONE	NONE

Answer: NONE

NONE

Answer: NONE

Answer: NONE

NONE

Answer: NONE

Answer: NONE

NONE

Answer: NONE

Explanation
In a week priority system A does not get preempted even though it has a lower priority than B and C. So A runs to completion from time 0 to 11. At time 11, C is run because it has a higher priority than B. Finally, when the C handler completes, the B handler runs for the next 11 time units.

Submit

LE18.3.2: Weak Priorities

0.0/1.0 point (ungraded)
Three devices, D1, D2, and D3, are serviced by interrupt handlers in an interrupt system that may choose to use either strong (preemptive) priorities or weak (non-preemptive) priorities. Their service times and maximum request rates are shown in the following table:

Device	Service time	Interrupt frequency	Deadline
D1	400us	1/(800us)	800us
D2	250us	1/(1000us)	300us
D3	100us	1/(1000us)	400us

Service time indicates how long it takes to run the interrupt handler for each device. The maximum time allowed to elapse between an interrupt request and the end of the execution of the interrupt handler is indicated by the deadline.

Can the requirements given in the table above be met using a **weak** priority ordering among the interrupt requests? If so give priority ordering for D1, D2, D3 or select device(s) whose deadlines cannot be met. Select all that apply.

Weak priority ordering or list device(s) with missed deadlines:

- [ ] D1 > D2
- [ ] D1 > D3
- [ ] D2 > D1
- [ ] D2 > D3
- [ ] D3 > D1
- [ ] D3 > D2
- [ ] D1 misses deadline
- [ ] D2 misses deadline
- [ ] D3 misses deadline

Submit

Discussion

Hide Discussion

Topic: 18. Devices and Interrupts / LE18.3

< Previous | Next >