




(a) reset, then a 3-beat MAC on all 4 lanes (in_first .. in_last), signed edge cases

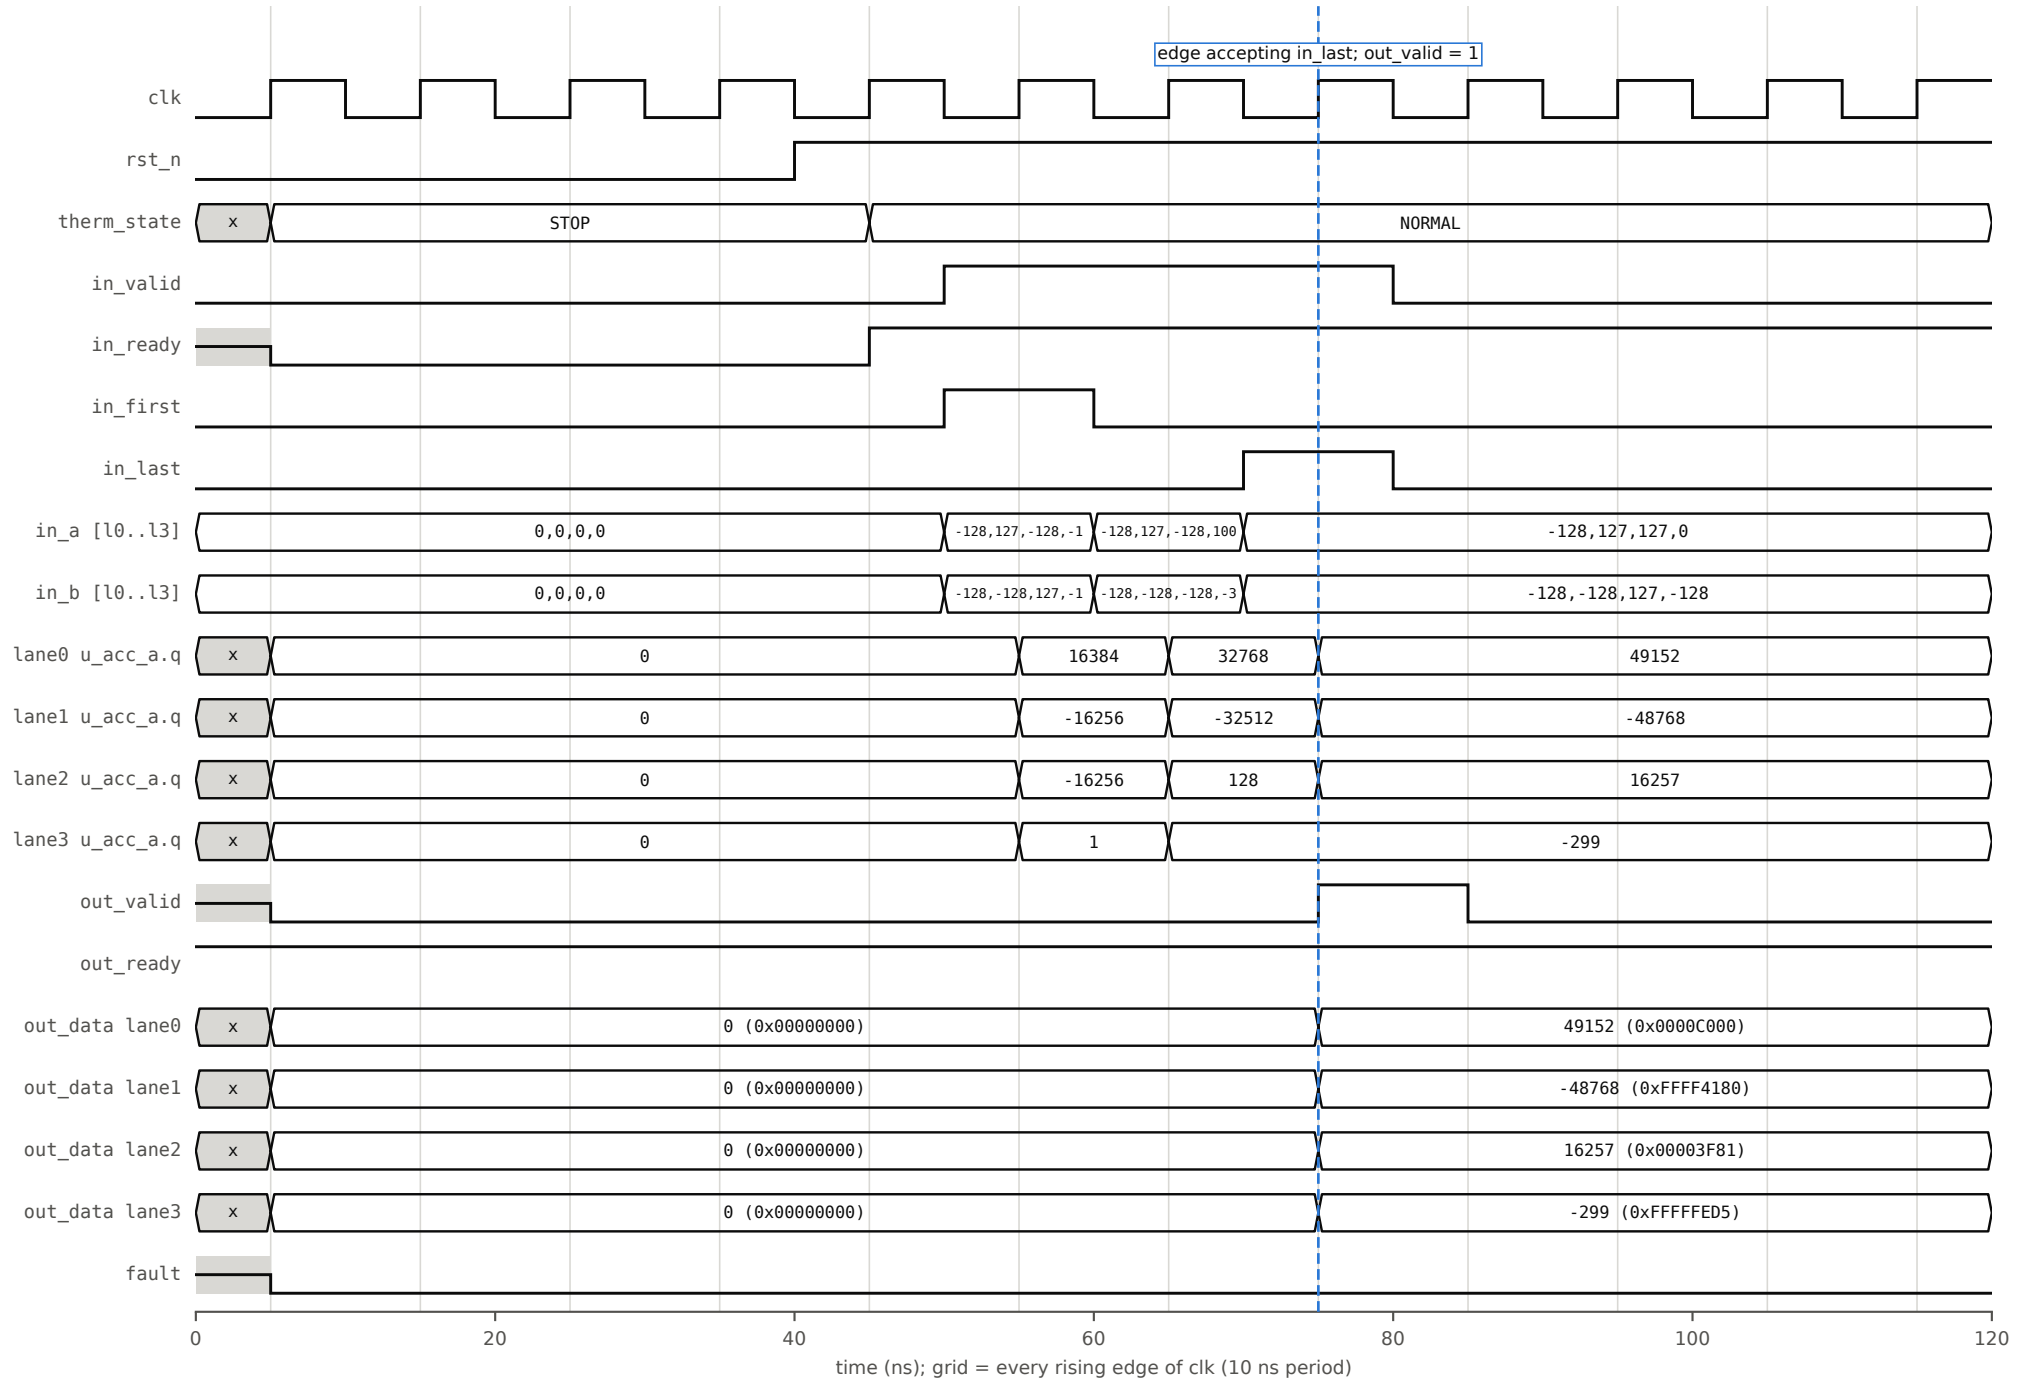


(b) output backpressure: out_ready low with a full buffer, then drain and refill

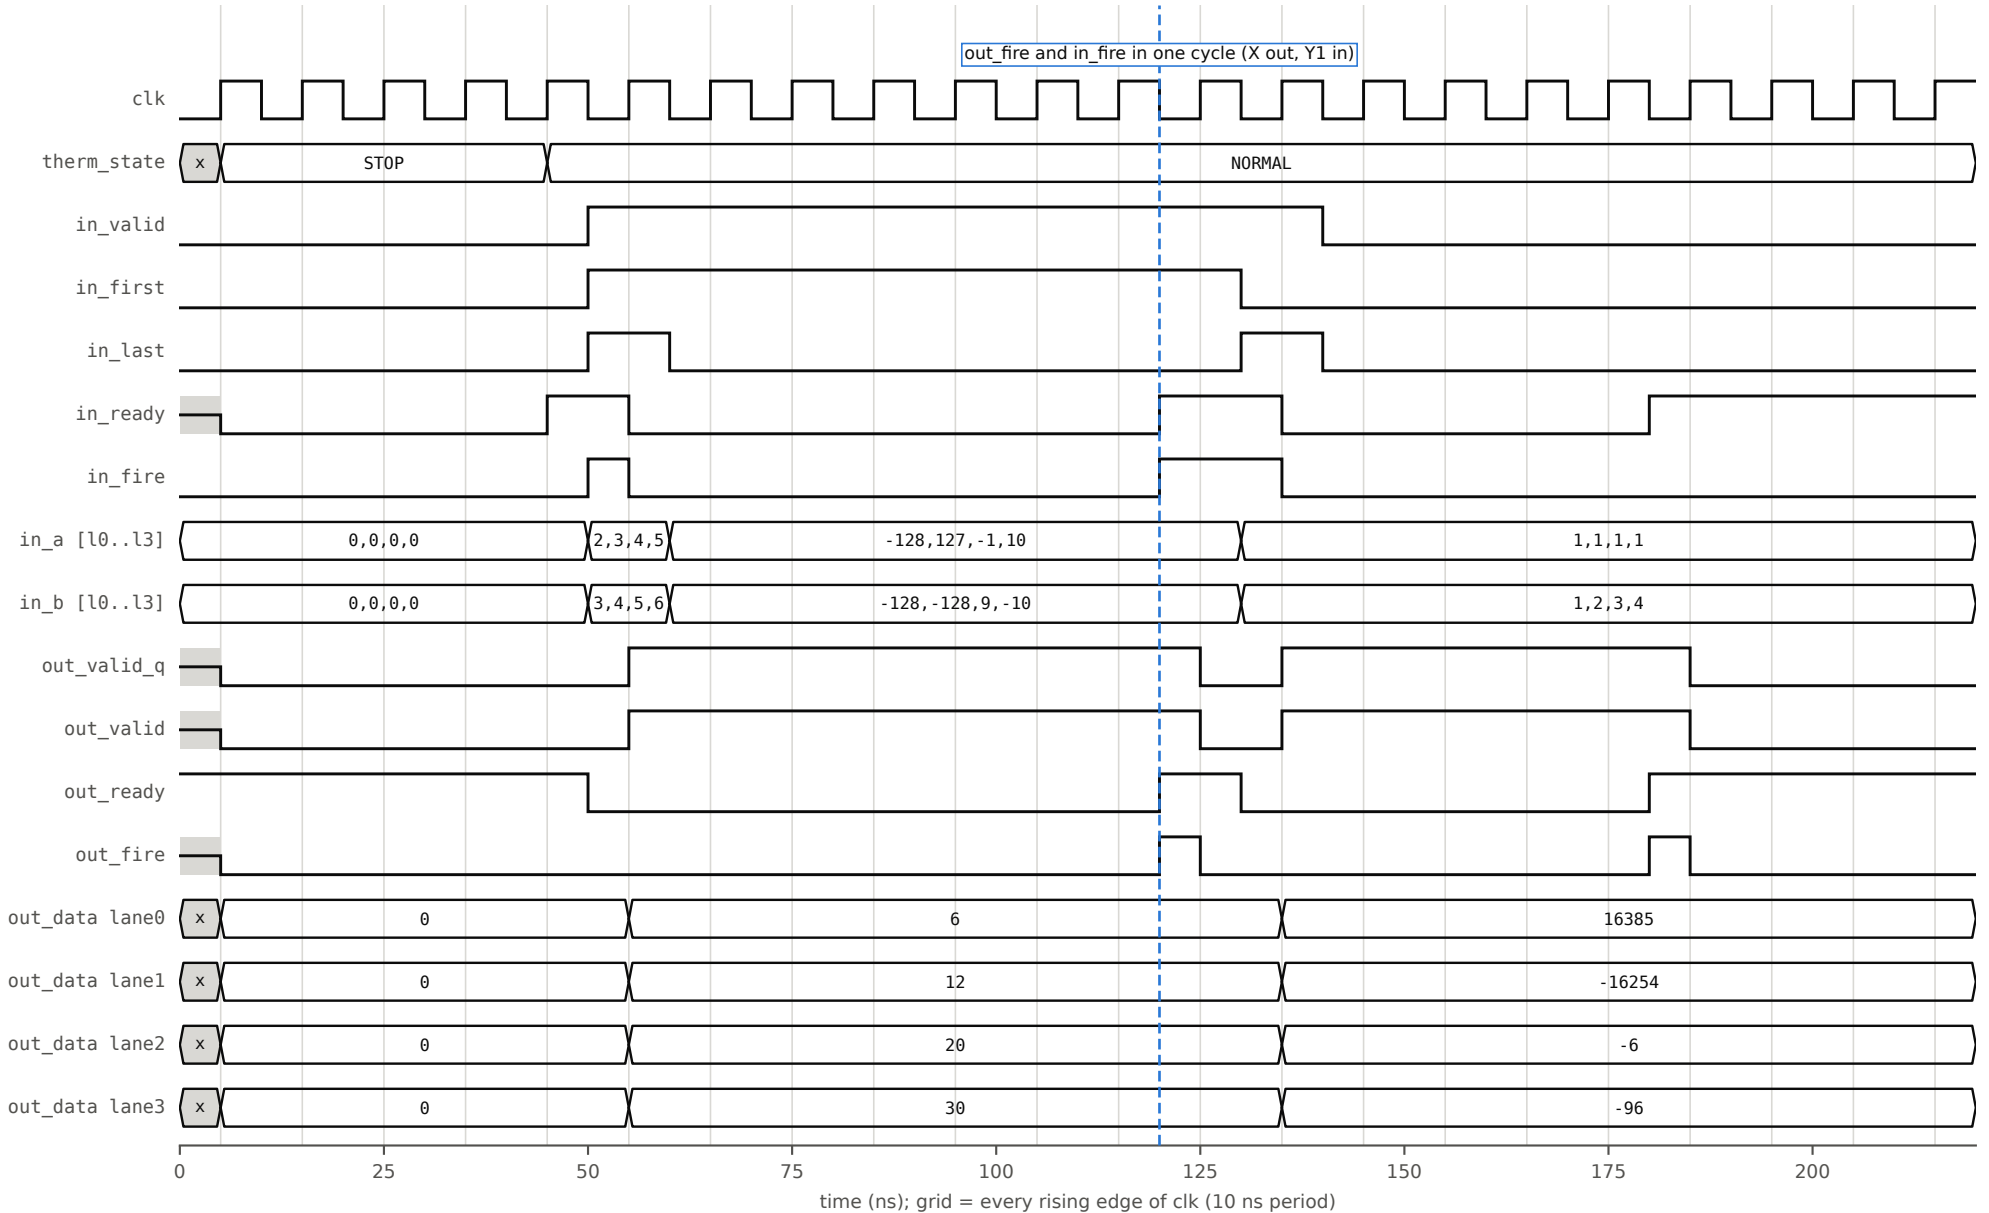


(c) single-bit upset in g_lane[1].u_lane.u_acc_b.q, fault-stop, clear_fault recovery

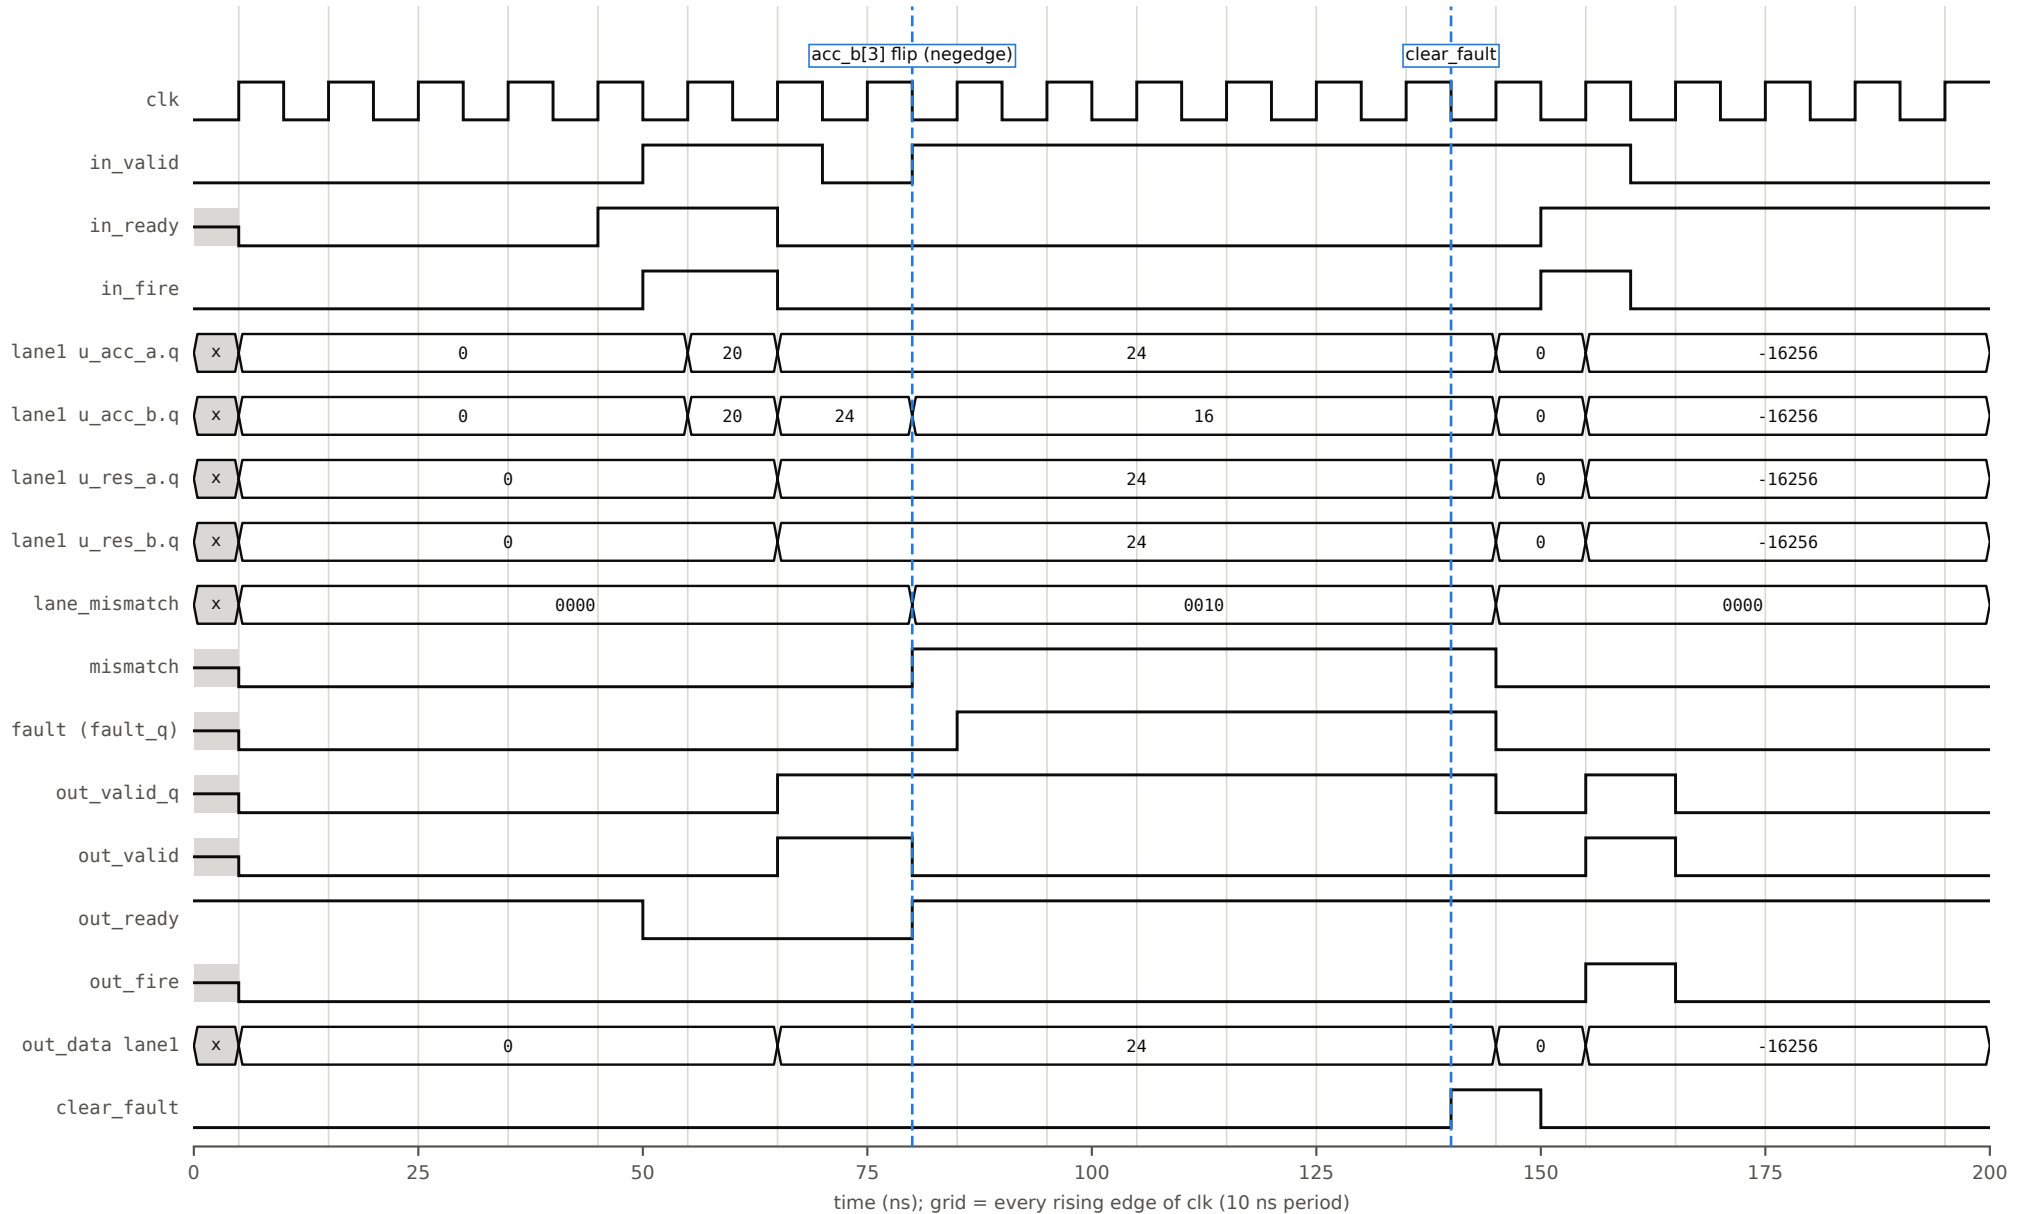

(c2) fault is sticky: a second test-only flip restores agreement, fault stays until clear_fault

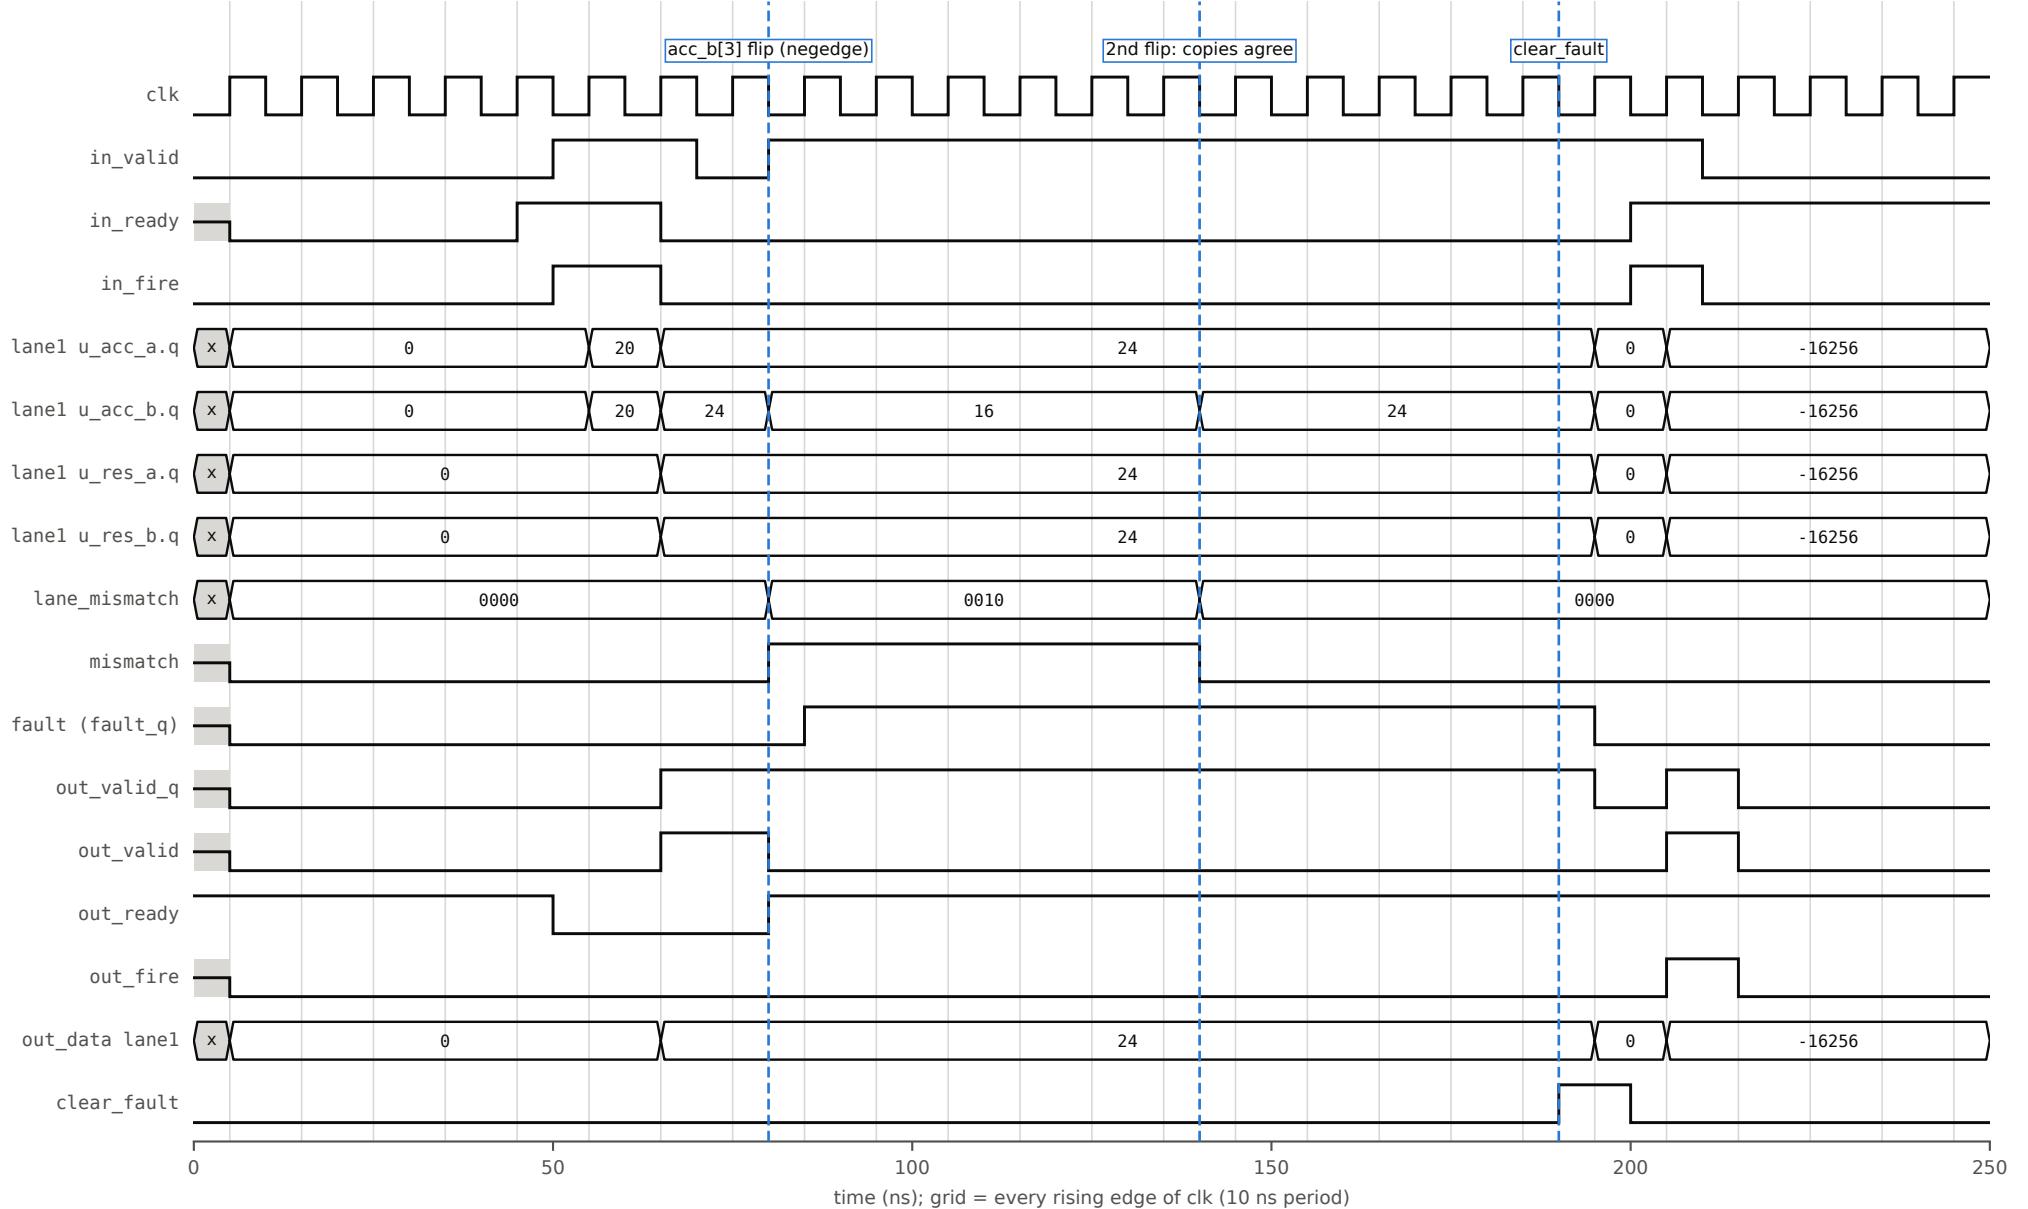

(d) thermal ramp 60 -> 85 -> 97 -> 65 C, one reading per cycle, temp_valid = 1

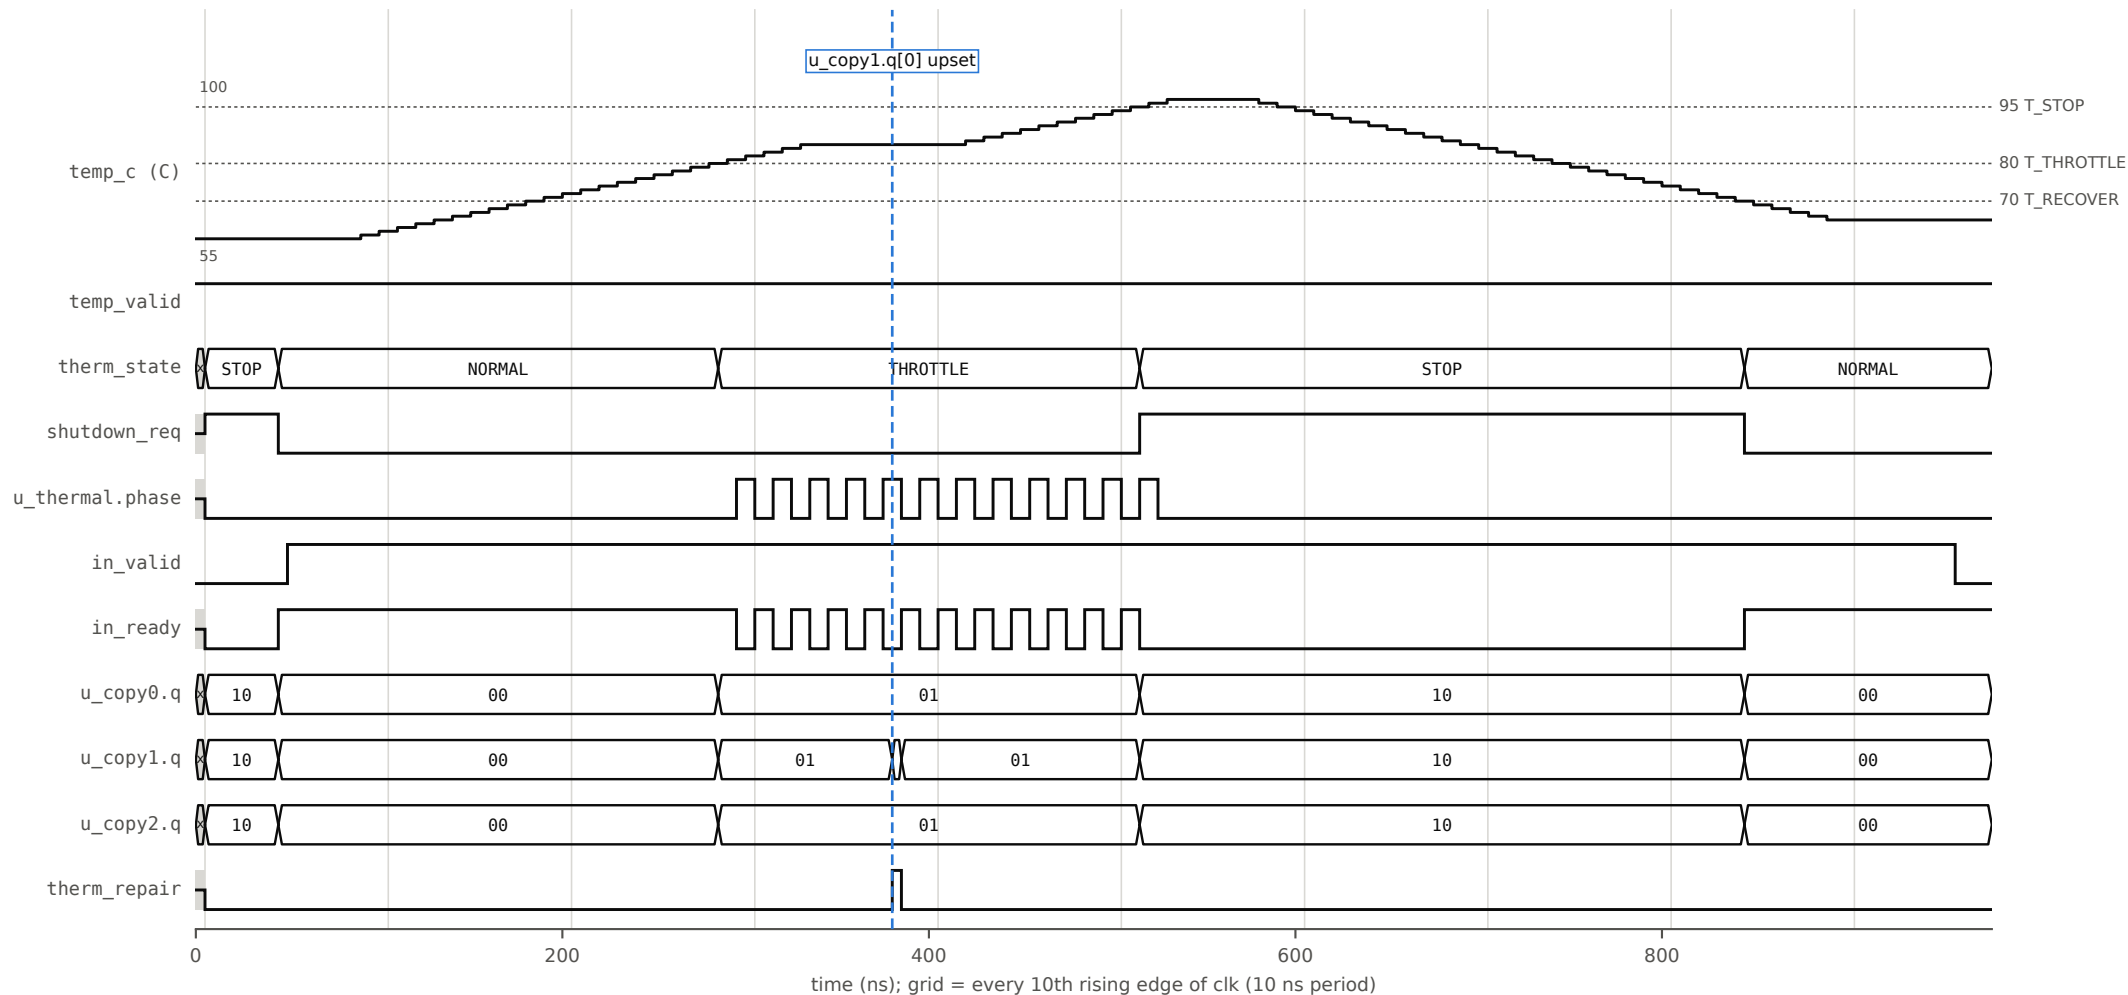

(d, zoom) THROTTLE: in_ready on alternate cycles; u_copy1.q upset outvoted, therm_repair for one cycle

