PRODUCT DATA SHEET

nXLi ENHANCED SINGLE INLET

edwardsvacuum.com

Enhanced performance.
Trusted reliability.
Simplified control.

The nXLi Enhanced platform combines our proven dry Multistage Roots technology with an enhanced drive and intuitive control, bringing together reliable performance, application flexibility and straightforward operation. With a choice of 110 or 200 m³/h pumping speeds, the single inlet models offer a flexible solution for a wide range of scientific, analytical and general vacuum applications.



One family.
Two performance levels.

Air cooled, single-phase
Ready for global deployment

Transient Boost Mode
Power when it matters

Standardised platform
Easy control & communication

Features and benefits

1 Available in 110 m³/h and 200 m³/h pumping speed variants, the nXLi Enhanced family offers the flexibility to match a wide range of vacuum requirements. Suitable for chamber evacuation and turbomolecular pump backing, the pumps can handle gas loads of up to 60 slm N_2 flow and support vacuum chambers up to 300 litres. Oil-free, dust-free operation helps minimise the risk of contamination and supports reliable analytical and research applications.

2 The nXLi Enhanced platform is designed for worldwide deployment, with support for 200–240 V (±10%), 50/60 Hz, single-phase mains supplies. The air-cooled design enables simple integration, while intelligent active cooling automatically optimizes cooling performance and minimizes noise where possible.

3 The enhanced drive features Transient Boost Mode, providing additional power when needed, such as initial chamber pump-down and temporary increases in gas load. The pump can operate at an elevated power level for a defined period before automatically returning to its continuous operating condition. This helps support larger chamber volumes, manage higher gas loads, and extend application flexibility while maintaining reliable operation.

4 The nXLi Enhanced features the familiar dry Multistage Roots control panel, providing a consistent user experience across our wider dry vacuum portfolio.
Standardised interfaces and communication protocols help simplify integration into existing systems, while local and remote control options enable convenient and flexible operation. An integrated USB port also enables pump monitoring and diagnostics through our nST2 software.

TECHNICAL DATA SINGLE INLET


	nXL110i Enhanced	nXL200i Enhanced
Peak pumping speed*	110 m^3/h	200 m^3/h
Ultimate vacuum (total pressure)	<0.02 mbar	
Inlet flange	NW40 or NW50	
Outlet flange	NW25	
Maximum permitted outlet pressure	0.4 bar(g)	
Maximum continuous inlet pressure	45 mbar	18 mbar
Operating temperature range	+5 °C to +40 °C	
Nominal rotational speed	9000 rpm	
Voltage input	200-240 V (+/-10%)	
Mains frequency	50/60 Hz	
Power connector 1-ph	C20 acc. to IEC 60320	
Power at ultimate	<700W	
Leak tightness	< 1 x 10^{-5} mbar*l/s	
Weight	72 kg	78 kg
Noise at ultimate vacuum	57 dB(A)	

* Values for the maximum pumping speed are taken at sea level. At levels higher than sea level, the pump's performance can be affected, and the rotational speed can drop below the nominal value.

ORDERING INFORMATION SINGLE INLET

Product Description	Order number
nXL110i E NW40/NW25	A77052320
nXL110i E NW50/NW25	A77052420
nXL200i E NW40/NW25	A77062320
nXL200i E NW50/NW25	A77062420


DIMENSIONS SINGLE INLET

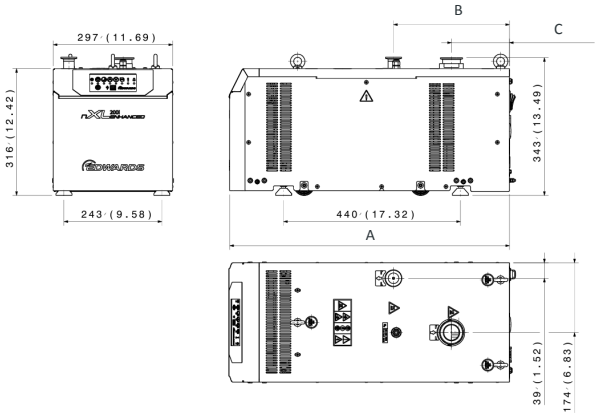

	A	B	C
nXL110i Enhanced	646 (25.43)	293 (9.39)	94 (3.71)
nXL200i Enhanced	696 (27.4)	289 (11.36)	144 (5.68)

* All dimensions are in mm & (inches)

PUMPING PERFORMANCE SINGLE INLET

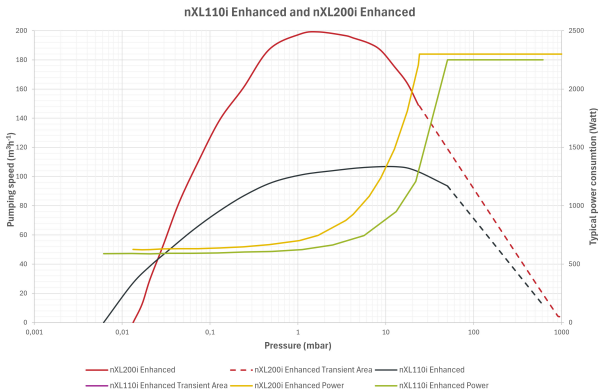

Publication Number: 3601 1006 01
© Edwards Limited 2026. All rights reserved.
Edwards and the Edwards logo are trademarks of Edwards Limited.

Whilst we make every effort to ensure that we accurately describe our products and services, we give no guarantee as to the accuracy or completeness of any information provided in this datasheet.

Edwards Ltd, registered in England and Wales No. 6124750, registered office: Innovation Drive, Burgess Hill, West Sussex, RH15 9TW, UK.