PRODUCT DATA SHEET

nXLi ENHANCED DUAL INLET

edwardsvacuum.com

Enhanced performance.
Trusted reliability.
Simplified control.

The nXLi Enhanced platform combines our proven dry Multistage Roots technology with an enhanced drive and intuitive control, bringing together reliable performance, application flexibility and straightforward operation. Available in single and dual inlet configurations with pumping speeds up to 200 m³/h, it is designed to support a wide range of scientific, analytical and general vacuum applications.



Dual inlet.
One pump.
Two functions.

Air cooled, single-phase
Ready for global deployment

Transient Boost Mode
Power when it matters

Standardised platform
Easy control & communication

Features and benefits

1 For applications such as mass spectrometry, where both high pumping speed for source gases and low backing pressure for turbomolecular pumps are required, the nXLi dual inlet Enhanced combines two vacuum functions in one compact pump. This enables simplified system design, reduced energy consumption, and a lower overall cost, without compromising performance. The nXL200i dual inlet Enhanced extends the range to support applications with increased performance requirements.

2 The nXLi Enhanced platform is designed for worldwide deployment, with support for 200–240 V (±10%), 50/60 Hz, single-phase mains supplies. The air-cooled design enables simple integration, while intelligent active cooling automatically optimizes cooling performance and minimizes noise where possible.

3 The enhanced drive features Transient Boost Mode, providing additional power when needed, such as initial chamber pump-down and temporary increases in gas load. The pump can operate at an elevated power level for a defined period before automatically returning to its continuous operating condition. This helps support larger chamber volumes, manage higher gas loads, and extend application flexibility while maintaining reliable operation.

4 The nXLi Enhanced features the familiar dry Multistage Roots control panel, providing a consistent user experience across our wider dry vacuum portfolio.
Standardised interfaces and communication protocols help simplify integration into existing systems, while local and remote control options enable convenient and flexible operation. An integrated USB port also enables pump monitoring and diagnostics through our nST2 software.

TECHNICAL DATA DUAL INLET


	nXL110i Enhanced	nXL200i Enhanced
Peak pumping speed primary inlet*,**	98 m^3/h	158 m^3/h
Peak pumping speed secondary inlet*,**	78 m^3/h	75 m^3/h
Ultimate vacuum (total pressure)	<0.07 mbar	
Inlet flange primary inlet	NW40 or NW50	
Inlet flange secondary inlet	NW25	
Outlet flange	NW25	
Maximum permitted outlet pressure	0.4 bar(g)	
Maximum continuous primary inlet pressure	37 mbar	24 mbar
Maximum continuous secondary inlet pressure	51 mbar	34 mbar
Operating temperature range	+5 °C to +40 °C	
Nominal rotational speed	9000 rpm	
Voltage input	200-240 V (+/-10%)	
Mains frequency	50/60 Hz	
Power connector 1-ph	C20 acc. to IEC 60320	
Power at ultimate	<700W	
Leak tightness	< 1 x 10^{-5} mbar*l/s	
Weight	72 kg	78 kg
Noise at ultimate vacuum	57 dB(A)	

* Values for the maximum pumping speed are taken at sea level. At levels higher than sea level, the pump's performance can be affected, and the rotational speed can drop below the nominal value.
** The maximum pumping speeds are measured with only one open inlet. With simultaneous gas flow at both inlets, the pumping speed will be different. Contact us for more details.

ORDERING INFORMATION DUAL INLET

Product Description	Order number
nXL110iD E NW40/NW25/NW25	A77072320
nXL110iD E NW50/NW25/NW25	A77072420
nXL200iD E NW40/NW25/NW25	A77082320
nXL200iD E NW50/NW25/NW25	A77082420


DIMENSIONS DUAL INLET

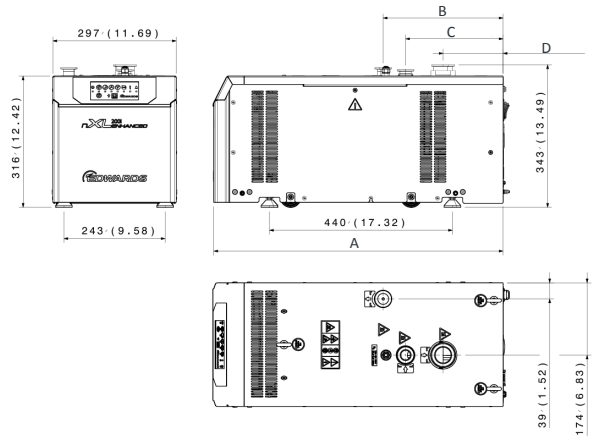

	A	B	C	D
nXL110i Enhanced	646 (25.43)	239 (9.39)	184 (7.26)	94 (3.71)
nXL200i Enhanced	696 (27.4)	289 (11.36)	234 (9.23)	144 (5.68)

* All dimensions are in mm & (inches)

PUMPING PERFORMANCE DUAL INLET

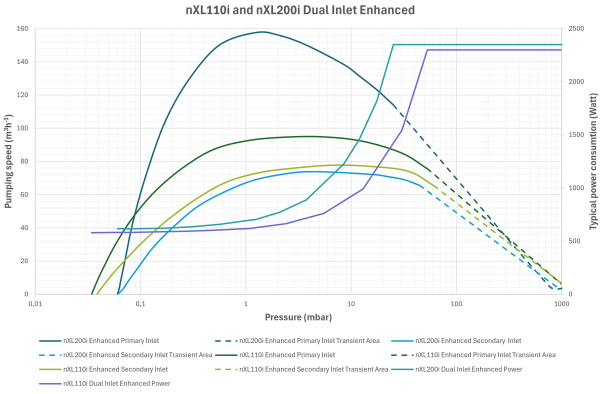

Publication Number: 3601 1016 01
© Edwards Limited 2026. All rights reserved.
Edwards and the Edwards logo are trademarks of Edwards Limited.

Whilst we make every effort to ensure that we accurately describe our products and services, we give no guarantee as to the accuracy or completeness of any information provided in this datasheet.

Edwards Ltd, registered in England and Wales No. 6124750, registered office: Innovation Drive, Burgess Hill, West Sussex, RH15 9TW, UK.