


Particulars for In-Situ Reconditioning of CMS Crossings at the time of Reconditioning

1. Name of Welding techniques
2. Name of the firm
3. Brand Name of welding consumables
4. Types of welding consumables
5. Railway
6. Division
7. Section
8. Route GMT
 - a) UP
 - b) DN

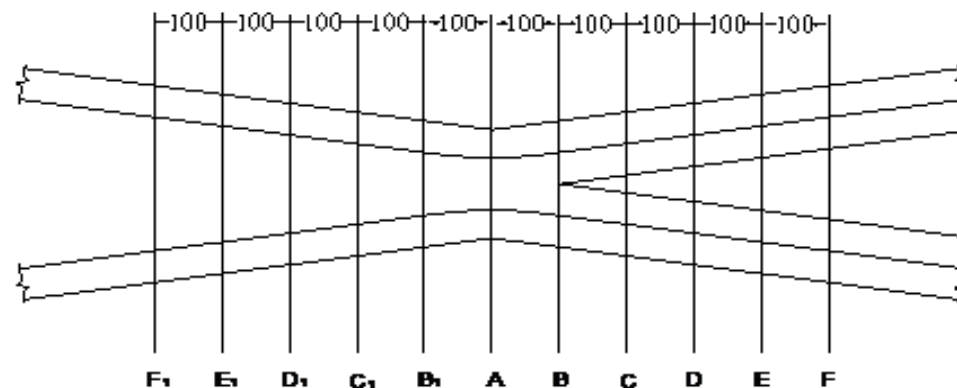

SN	Angle, Rail Section & other details of crossing	Date of Reconditioning	Line (Up/ Down)	Station	Point No.	Facing/ Trailing	Time of Reconditioning			Wear Measurement (mm) before reconditioning			Length of Weld			Remarks
							Grinding time before welding	Welding time	Grinding time after welding	RWR	Nose	LWR	LWR	Nose	RWR	
										A B C D E F B1 C1 D1 E1 F1	B C D E F	A B C D E F B1 C1 D1 E1 F1				

Note: The firm will also provide a copy of technical literature of the welding consumable used. This must include chemical composition of weld metal (percentage range of each element with minimum & maximum value), hardness range of weld metal and other relevant information regarding welding


Firm's Representative's Signature

Rly's Representative's Signature

Countersigned by Rly. Officer

Particulars for Service Behaviour of In-Situ Reconditioned CMS Crossings

1. Name of welding techniques
2. Name of the firms
3. Brand Name of welding
4. consumables
5. Types of welding consumables
6. Railway
7. Division
8. Section

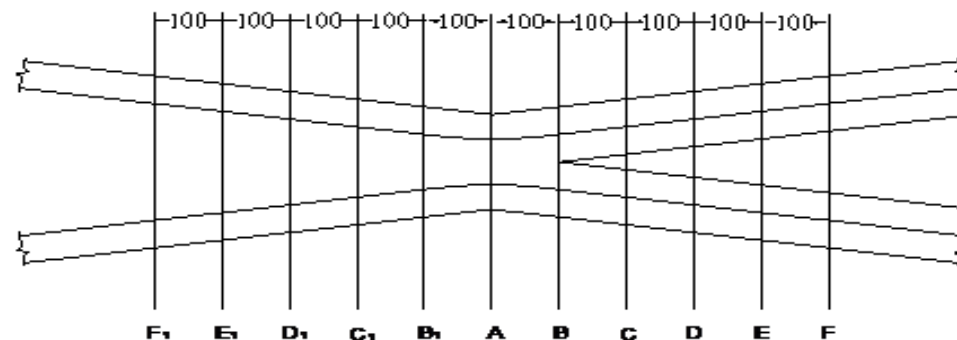

SN	Angle, Rail Section & other details of crossing	Date of Reconditioning	Line (Up/Down)	Station	Point No.	Facing/Trailing	Date of Inspection	GMT earned	GMT of Point	Wear Measurement (mm)			Surface Condition Visual /DP	Remarks
										RWR	Nose	LWR		
										A B C D E F B1 C1 D1 E1 F1	B C D E F	A B C D E F B1 C1 D1 E1 F1		

Note: Acceptance criteria shall be same as given in case of MMAW electrodes as per relevant Clause of TDG-026 latest version for the service life of minimum 80 GMT.

Firm's Representative's Signature

Rly's Representative's Signature

Countersigned by Rly. Officer