Single Phase Glass Passivated Silicon Bridge Rectifier

V_{RRM} = 600 V - 1000 V
I_O = 4 A

Features

- Ideal for printed circuit board
- Reliable low cost construction
- Plastic material has Underwriters Laboratory Flammability Classification 94V-0
- Surge overload rating to 120 Amperes peak
- Types from 50 V to 400 V V_{RRM}
- Not ESD Sensitive

KBJ Package



Mechanical Data

Case: Molded plastic
Weight: 0.15 ounce, 4.0 grams
Mounting torque: 5 inch-lb max

Maximum ratings at Ta = 25 °C (ambient temperature), unless otherwise specified

Parameter	Symbol	Conditions	KBJ406G	KBJ408G	KBJ410G	Unit
Repetitive peak reverse voltage	V_{RRM}		600	800	1000	V
RMS reverse voltage	V_{RMS}		420	560	700	V
DC blocking voltage	V_{DC}		600	800	1000	V
Operating temperature	T_j		-55 to 150	-55 to 150	-55 to 150	°C
Storage temperature	T_{stg}		-55 to 150	-55 to 150	-55 to 150	°C

Electrical characteristics at Ta = 25 °C, unless otherwise specified

Single phase, half sine wave, 60 Hz, resistive or inductive load
For capacitive load derate current by 20%

Parameter	Symbol	Conditions	KBJ406G	KBJ408G	KBJ410G	Unit
Maximum average forward rectified current	I_O	T_c = 108 °C	4	4	4	A
		T_a = 25 °C	2.3	2.3	2.3	
Peak forward surge current	I_{FSM}	8.3 ms single sine-wave	120	120	120	A
Maximum instantaneous forward voltage per leg	V_F	I_F = 4 A	1.1	1.1	1.1	V
Maximum reverse current at rated DC blocking voltage per leg	I_R	T_a = 25 °C	5	5	5	µA
		T_a = 125 °C	500	500	500	

FIG.1-DERATIVE CURVE FOR OUTPUT RECTIFIER CURRENT

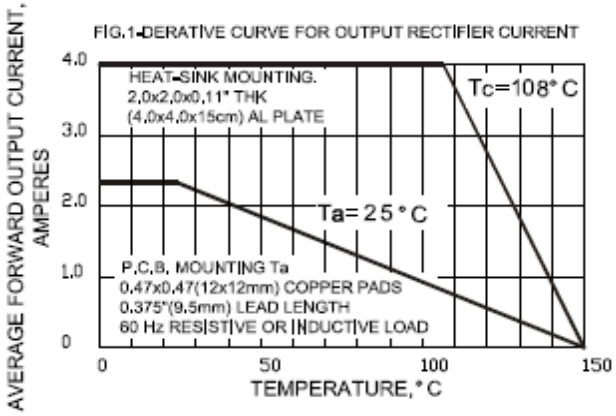

FIG. 2 - MAXIMUN NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

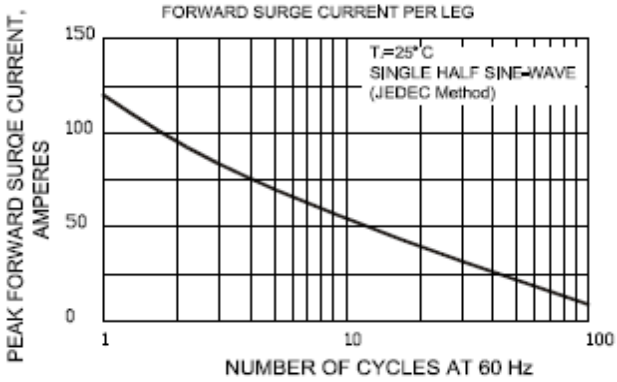

FIG.3-TYPICAL FORWARD CHARACTERISTICS PER LEG

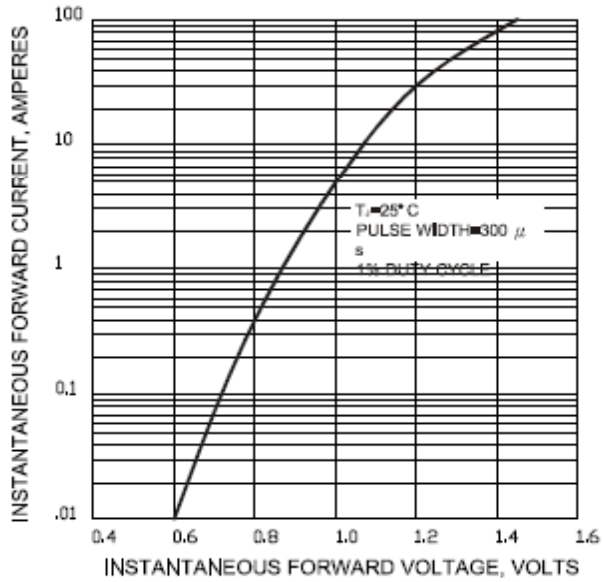

FIG.4-TYPICAL REVERSE CHARACTERISTICS PER LEG

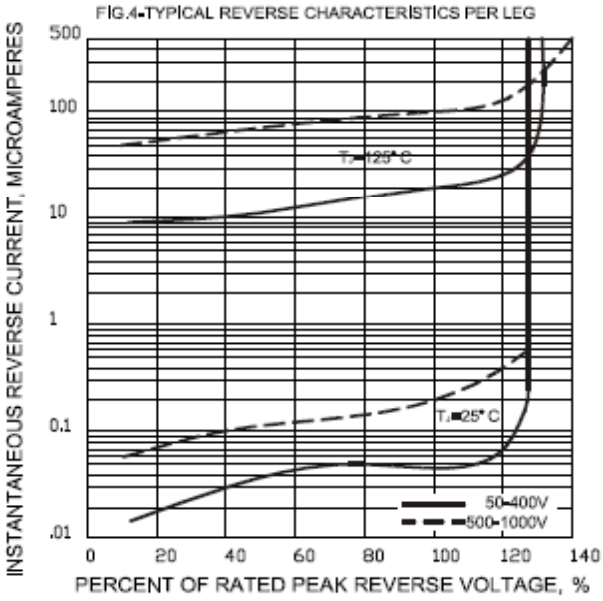

FIG.5-TYPICAL JUNTION CAPACITANCE PER LEG

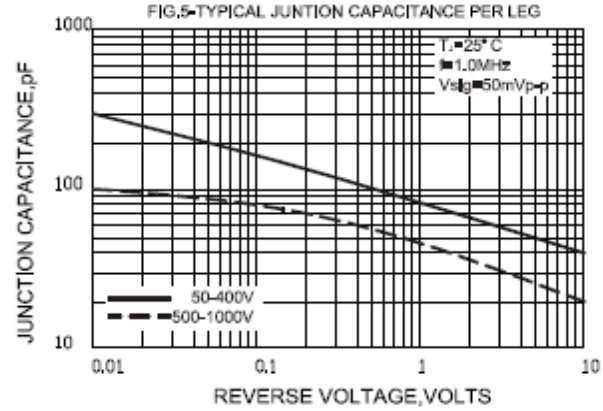

FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE

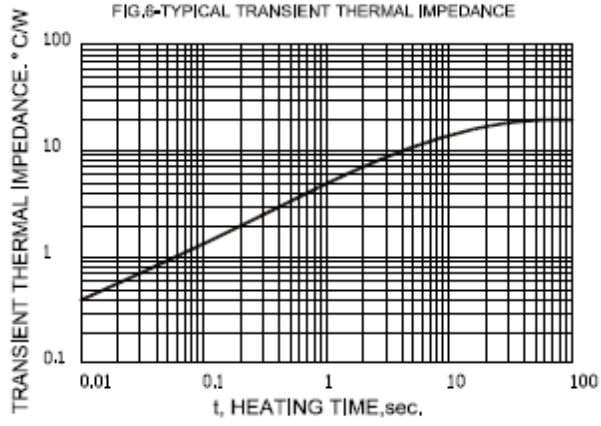

Package dimensions and terminal configuration

Product is marked with part number and terminal configuration.

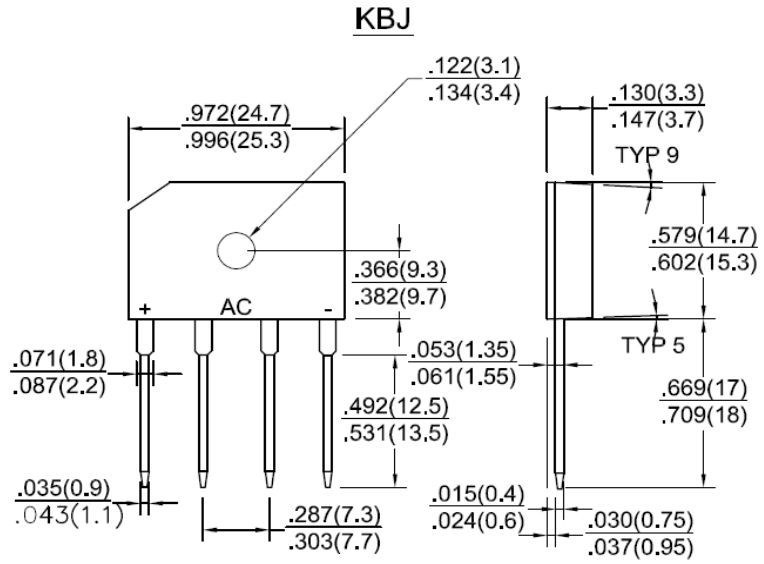

Dimensions in inches and (millimeters)