



PTT PHENOL COMPANY
LIMITED

PROCESS SPECIFICATION

DECOMPOSER DRUM (D-2304)

Docu. No. : 14780-8120-PS-D2304
Project No. : 120117
Rev. No. : Z1
Date : MAY 10, 2016
Page : 1 / 4

TITLE :

DECOMPOSER DRUM

(D-2304)

DISCIPLINE : **PROCESS**
DOCUMENT NO. : **14780-8120-PS-D2304**
PROJECT NAME : **PTT Phenol Train II Project**
PROJECT NO. : **120117**
OWNER : **PTT Phenol Company Limited (PPCL)**

Z1	MAY 10, 2016	AS BUILT	S.W.Park	J.S.Chung	-	S.W.Lee
F1	MAY 22, 2014	FINAL ISSUE	S.W.Park	J.S.Chung	-	S.W.Lee
A2	DEC 11, 2013	APPROVED FOR DESIGN	S.W.Park	J.S.Chung	-	S.W.Lee
A1	OCT 2, 2013	APPROVED FOR DESIGN	S.W.Park	J.S.Chung	-	S.W.Lee
O1	JUN 27, 2013	COMMENT ISSUE	S.W.Park	J.S.Chung	-	S.W.Lee
REV. NO.	DATE	DESCRIPTION	PREP'N	REVIEW	QA REVIEW	APPROVAL
REV. NO.	PREPARATION DEPT.	PREP'N	REVIEW	QA REVIEW	APPROVAL	
Z1	PROCESS	S.W.Park	J.S.Chung	-	S.W.Lee	
		MAY 10, 2016	MAY 10, 2016	-	MAY 10, 2016	

This Document is the property of POSCO Engineering Co., Ltd. Therefore, it shall not be released to Any third party without permission of an authorized personnel of the POSCO Engineering Co., Ltd.

[illegible]



Note: The information in this document is confidential and the property of UOP LLC and must not be disclosed to others or reproduced in any manner or used for any purpose whatsoever without its written permission.



VESSELS

PROJECT SPECIFICATION

963766 — 301

SHEET 3 / 4

REV	DATE	BY	APVD	REV	DATE	BY	APVD
0	29MAR12	JG	MYW				

General Notes

- A. Vessels shall be constructed in accordance with the following unless otherwise specified on the individual vessel specification sheet.

Standards:

UOP Standard Specification 3-11
UOP Standard Drawing 8-121

- B. Although the resulting inside diameter may be slightly different than specified, vessels without trays or packing, may be fabricated from pipe.
- C. The dimensioned location of some of the vessel level nozzles may be noted as min (minimum) or max (maximum). It is the responsibility of the contractor to adjust these dimensions to suit the specific level requirements specified on the UOP Piping and Instrument Diagram(s) and on UOP Standard Drawing 8-121. When additional nozzles are required for level instrumentation, the contractor shall specify them consistent with the size, class and facing requirements specified in the UOP Project Specification 301-Vessels and on the UOP Piping and Instrument Diagram(s).
- D. When system of measurement is metric, all dimensions are in millimeters unless noted otherwise.
- E. Contractor shall not locate TI thermowells in a downcomer. Contractor shall also ensure that TI thermowells are located to avoid interference with downcomers, weirs, distributors, collectors, baffles, chimneys, traps and all other vessel internals.

Other specifications
referenced in this
specification:

UOP Standard Specification: 3-11, 3-15

UOP Standard Drawing: 3-115, 3-122, 3-123, 3-183, 3-190, 3-272, 3-278, 3-280, 3-305, 3-313, 3-322, 8-121

UOP Project Specification: 963766-307, 963766-401, 963766-808



VESSELS

ITEM NO D-2304

INT	11.0 kg/cm2(g)	@	250 °C
EXT	FULL VACUUM	@	60 °C
Metal Temperature(Min)			15 °C
	0.7 kg/cm2(g)	@	60 °C
			° C

Radiograph	MR
Postweld Heat Treat	MR

Material	Corrosion Allowance mm (Min)
SA 240 TYPE 304L (NOTE 1)	1.5

This Vessel is in the Following Service(s):

Hydrogen	NO
Hydrofluoric (HF) Acid	NO
Hydrofluoric (HF) Acid (with Resid. Elem. Control)	NO
Wet Hydrogen Sulfide (H2S)	NO
Severe Cyclic	NO
Caustic	NO
Carbonate	NO
Amine	NO
Note:	

	Vessel Heads	
Top	FLANGED	
Bottom	2:1 ELLIPTICAL	
	Accessories Applied by Fabricator	
Ladder & Platform Clips	AS REQUIRED	
Insulation Clips & Rings	NO	
Vessel Support	YES	

Nozzles and Manways				
	Mark	No	Size Inches	Service
	AI	1	6	FEED
	AM	1	24	SAFETY HEAD
	AO	1	3	BLANKETING
	BI	1	14	RECYCLE
	BJ	2	2	LEVEL GAUGE
	BK	2	2	LEVEL SWITCH
	BL	2	2	LEVEL TRANSMITTER
	BM	1	24 ID	MANWAY
	BP	1	2	PI
	BS	2	2	LEVEL SWITCH
	BT	3	2	TI-TR-TW
	CW	1	24	OUTLET

[illegible]

Class	-	ASME CL300
-------	---	------------

Facing - RAISED FACE


Normal Liquid Level	=	2100 mm ABOVE BOTTOM TANGENT
Specific Gravity	=	0.919

NOTES:

1. VESSEL SHALL BE CONSTRUCTED IN ACCORDANCE WITH UOP STANDARD SPEC 3-15. ALTERNATELY, ENTIRE VESSEL SHALL BE KILLED CARBON STEEL LINED WITH 3mm THICK TYPE 304L, ALL INTERNALS TO BE OF STAINLESS STEEL. ALL NOZZLES AND MANWAYS TO TO BE LINED AND FACED WITH STAINLESS STEEL, AND LINING IS CORROSION ALLOWANCE. KILLED CARBON STEEL VESSEL SHALL BE CONSTRUCTED AND FABRICATED IN ACCORDANCE WITH UOP STD SPEC. 3-1 1.
2. 2-LAYERS OF GRATING (WK-15-2), ROTATE 45 , DWG 3-305. GRATING TO BE INSTALLED/REMOVED THROUGH MANWAY.
3. MODIFIED CIRCULAR VORTEX BREAKER TO BE USED FOR BOTTOM NOZZLE. WEEP HOLES (2 X 3/4" DIA DRAIN HOLES ON OPPOSITE SIDES) FOR COMPLETE DRAINAGE.

PROJECT SPECIFICATION
063766 - 301 SHEET 4 / 4

REV	DATE	BY	APP'D	REV	DATE	BY	APP'D
0	29MAR12	JG	MYW				

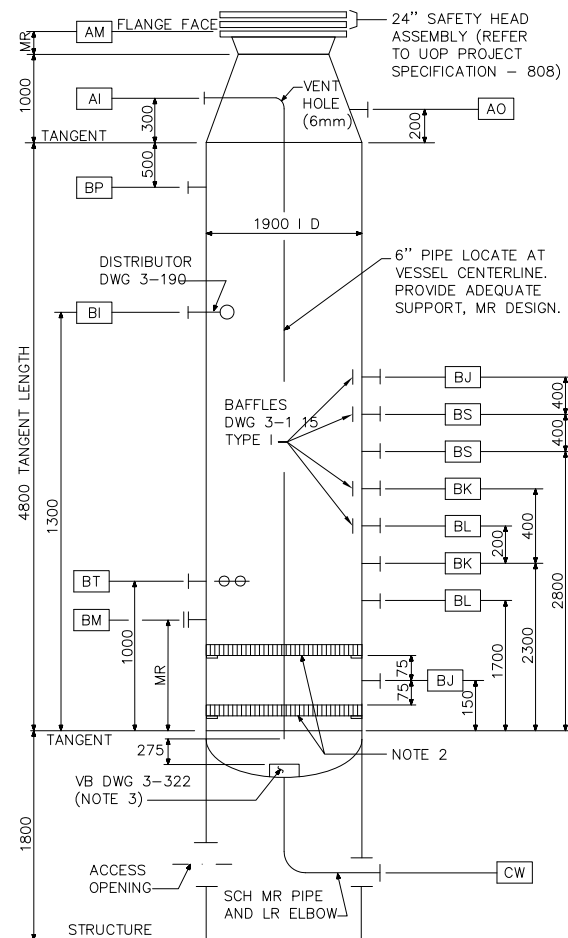

Drawings Referred to in this Specification

3-1 15	3-190	3-305	3-322			
--------	-------	-------	-------	--	--	--