Data Spec

42HS40-1204D 1.2A Torque:40N.cm Stepper Motor

A stepper motor to satisfy all your 3D-Printer, robotics, Linear Motion projects needs! This 4-wire bipolar stepper has 1.8° per step for smooth motion and a nice holding torque. The motor was specified to have a max current of 1.2A so that it could be driven easily with common motor shield for Arduino (or other motor driver) and a wall adapter or lead-acid battery.



SKU: EMH-1016


Brief Data:

- Nema17 Bipolar
- Number of Phase: 2
- Step Angle: 1.8°
- Phase Voltage: 2.50Vdc
- Phase Current: 1.2A
- Phase Resistance: 2.1Ω ±10%
- Inductance: 4.5mH ±20%
- Number of Wire: 4
- Holding Torque: 40N.cm
- Shaft Diameter: Ø5mm
- Max. Radial Force: 28N (20mm from flange)
- Max. Axial Force: 10N
- Temperature rise: 80°C Max.
- Insulation Class: B
- Dielectric Strength: 500VAC/1-minute
- Mass: 285g

Application:


- 3D Printer
- CNC machines
- Linear actuators
- Prototyping machines
- Precision Telescope
- Pick and place machines

Mechanical Dimension:

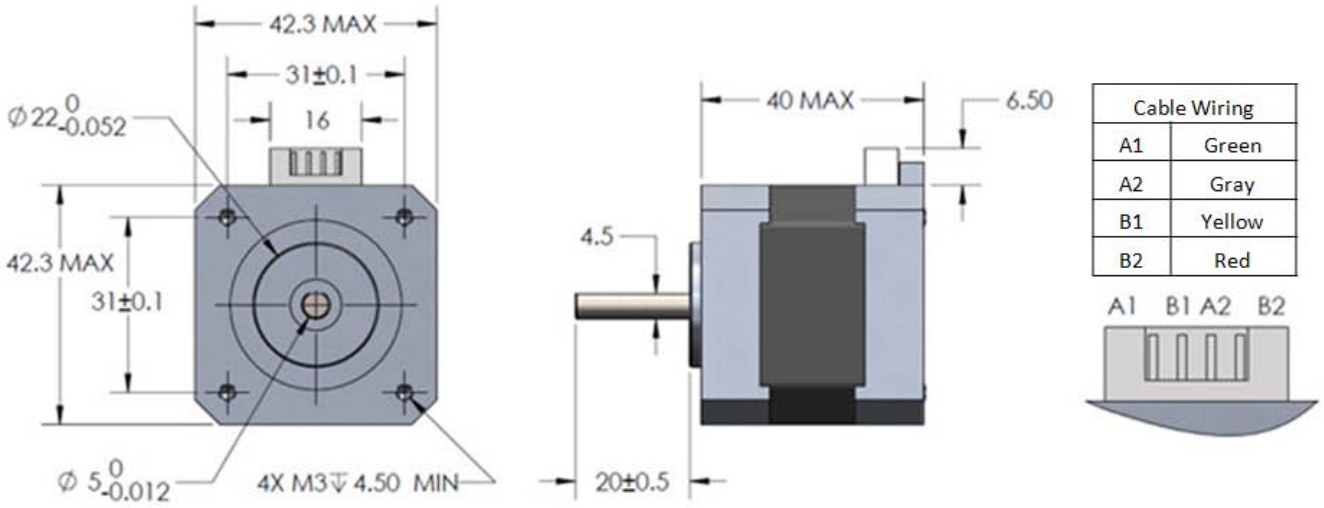

Cable Wiring	
A1	Green
A2	Gray
B1	Yellow
B2	Red

Connection Diagram:

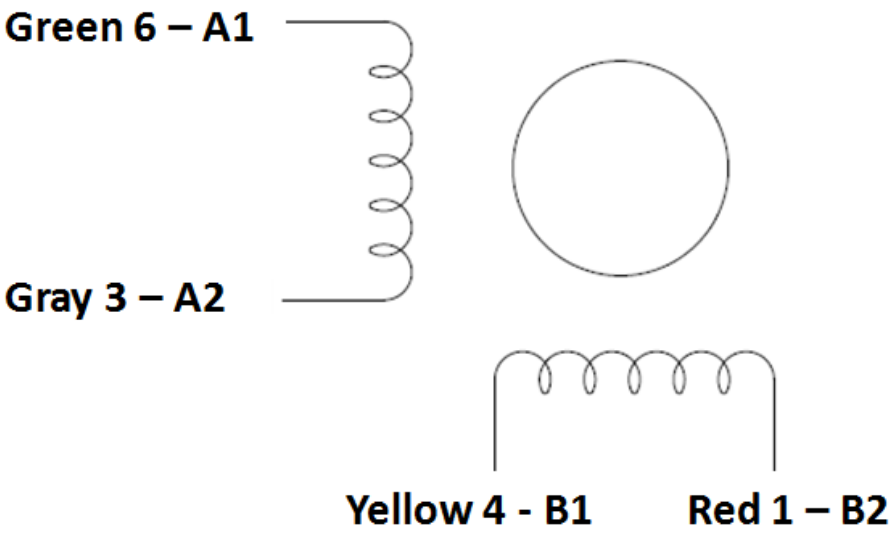

Recommend Driver Board & Accessory:

- CNC Shield for Arduino Board
- A4988 Stepper Motor Driver
- GT2 Pulley 5mm Bore
- 5mm to 8mm Motor Shaft Coupler

Nema-17 Stepper Motor Body Length Comparison:

