



Sep.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

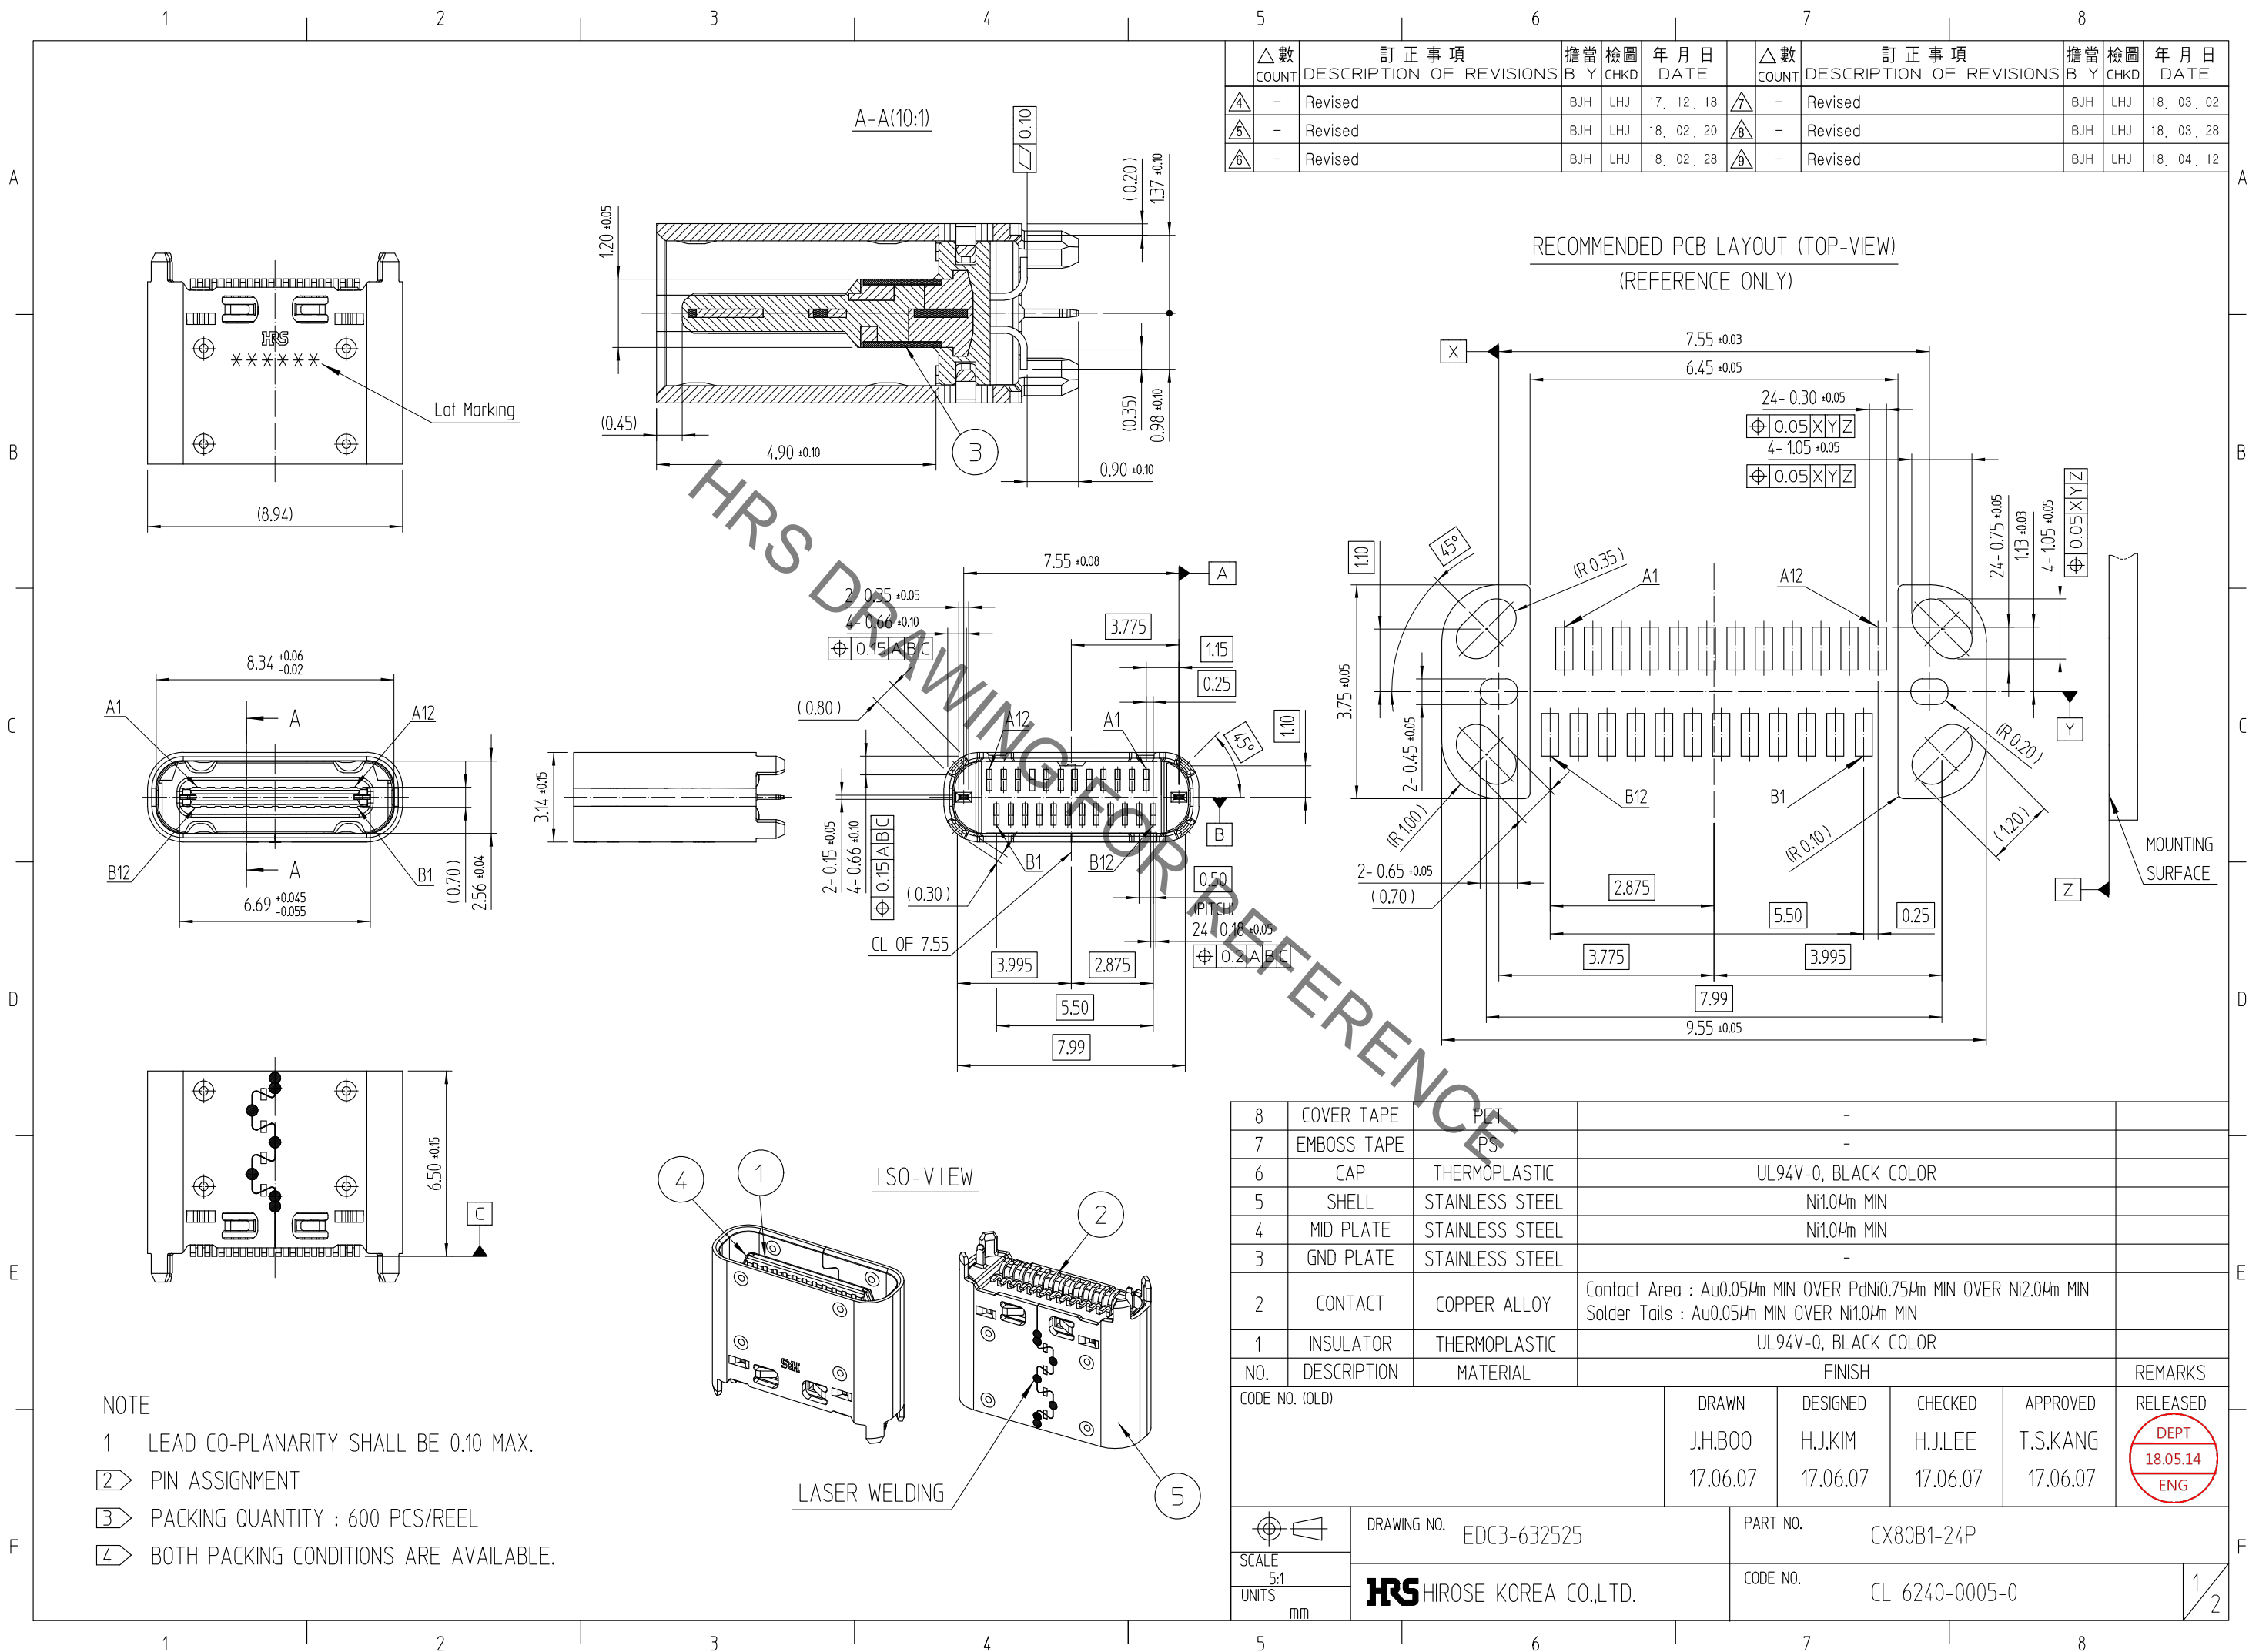

- NOTE
- 1 LEAD CO-PLANARITY SHALL BE 0.10 MAX.
 - 2 PIN ASSIGNMENT
 - 3 PACKING QUANTITY : 600 PCS/REEL
 - 4 BOTH PACKING CONDITIONS ARE AVAILABLE.

訂正事項				訂正事項			
△数	DESCRIPTION OF REVISIONS	担当者	検査者	年月日	△数	DESCRIPTION OF REVISIONS	担当者
4	- Revised	BJH	LHJ	17. 12. 18	7	- Revised	BJH
5	- Revised	BJH	LHJ	18. 02. 20	8	- Revised	BJH
6	- Revised	BJH	LHJ	18. 02. 28	9	- Revised	BJH

8	COVER TAPE	PET	-	
7	EMBOSS TAPE	PS	-	
6	CAP	THERMOPLASTIC	UL94V-0, BLACK COLOR	
5	SHELL	STAINLESS STEEL	Ni1.0μm MIN	
4	MID PLATE	STAINLESS STEEL	Ni1.0μm MIN	
3	GND PLATE	STAINLESS STEEL	-	
2	CONTACT	COPPER ALLOY	Contact Area : Au0.05μm MIN OVER PdNi0.75μm MIN OVER Ni2.0μm MIN Solder Tails : Au0.05μm MIN OVER Ni1.0μm MIN	
1	INSULATOR	THERMOPLASTIC	UL94V-0, BLACK COLOR	
NO.	DESCRIPTION	MATERIAL	FINISH	REMARKS
CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED
		J.H.BOO	H.J.KIM	H.J.LEE
		17.06.07	17.06.07	17.06.07
DRAWING NO.		PART NO.		RELEASED
EDC3-632525		CX80B1-24P		DEPT 18.05.14 ENG
SCALE		CODE NO.		1/2
5:1		CL 6240-0005-0		
UNITS				
mm				

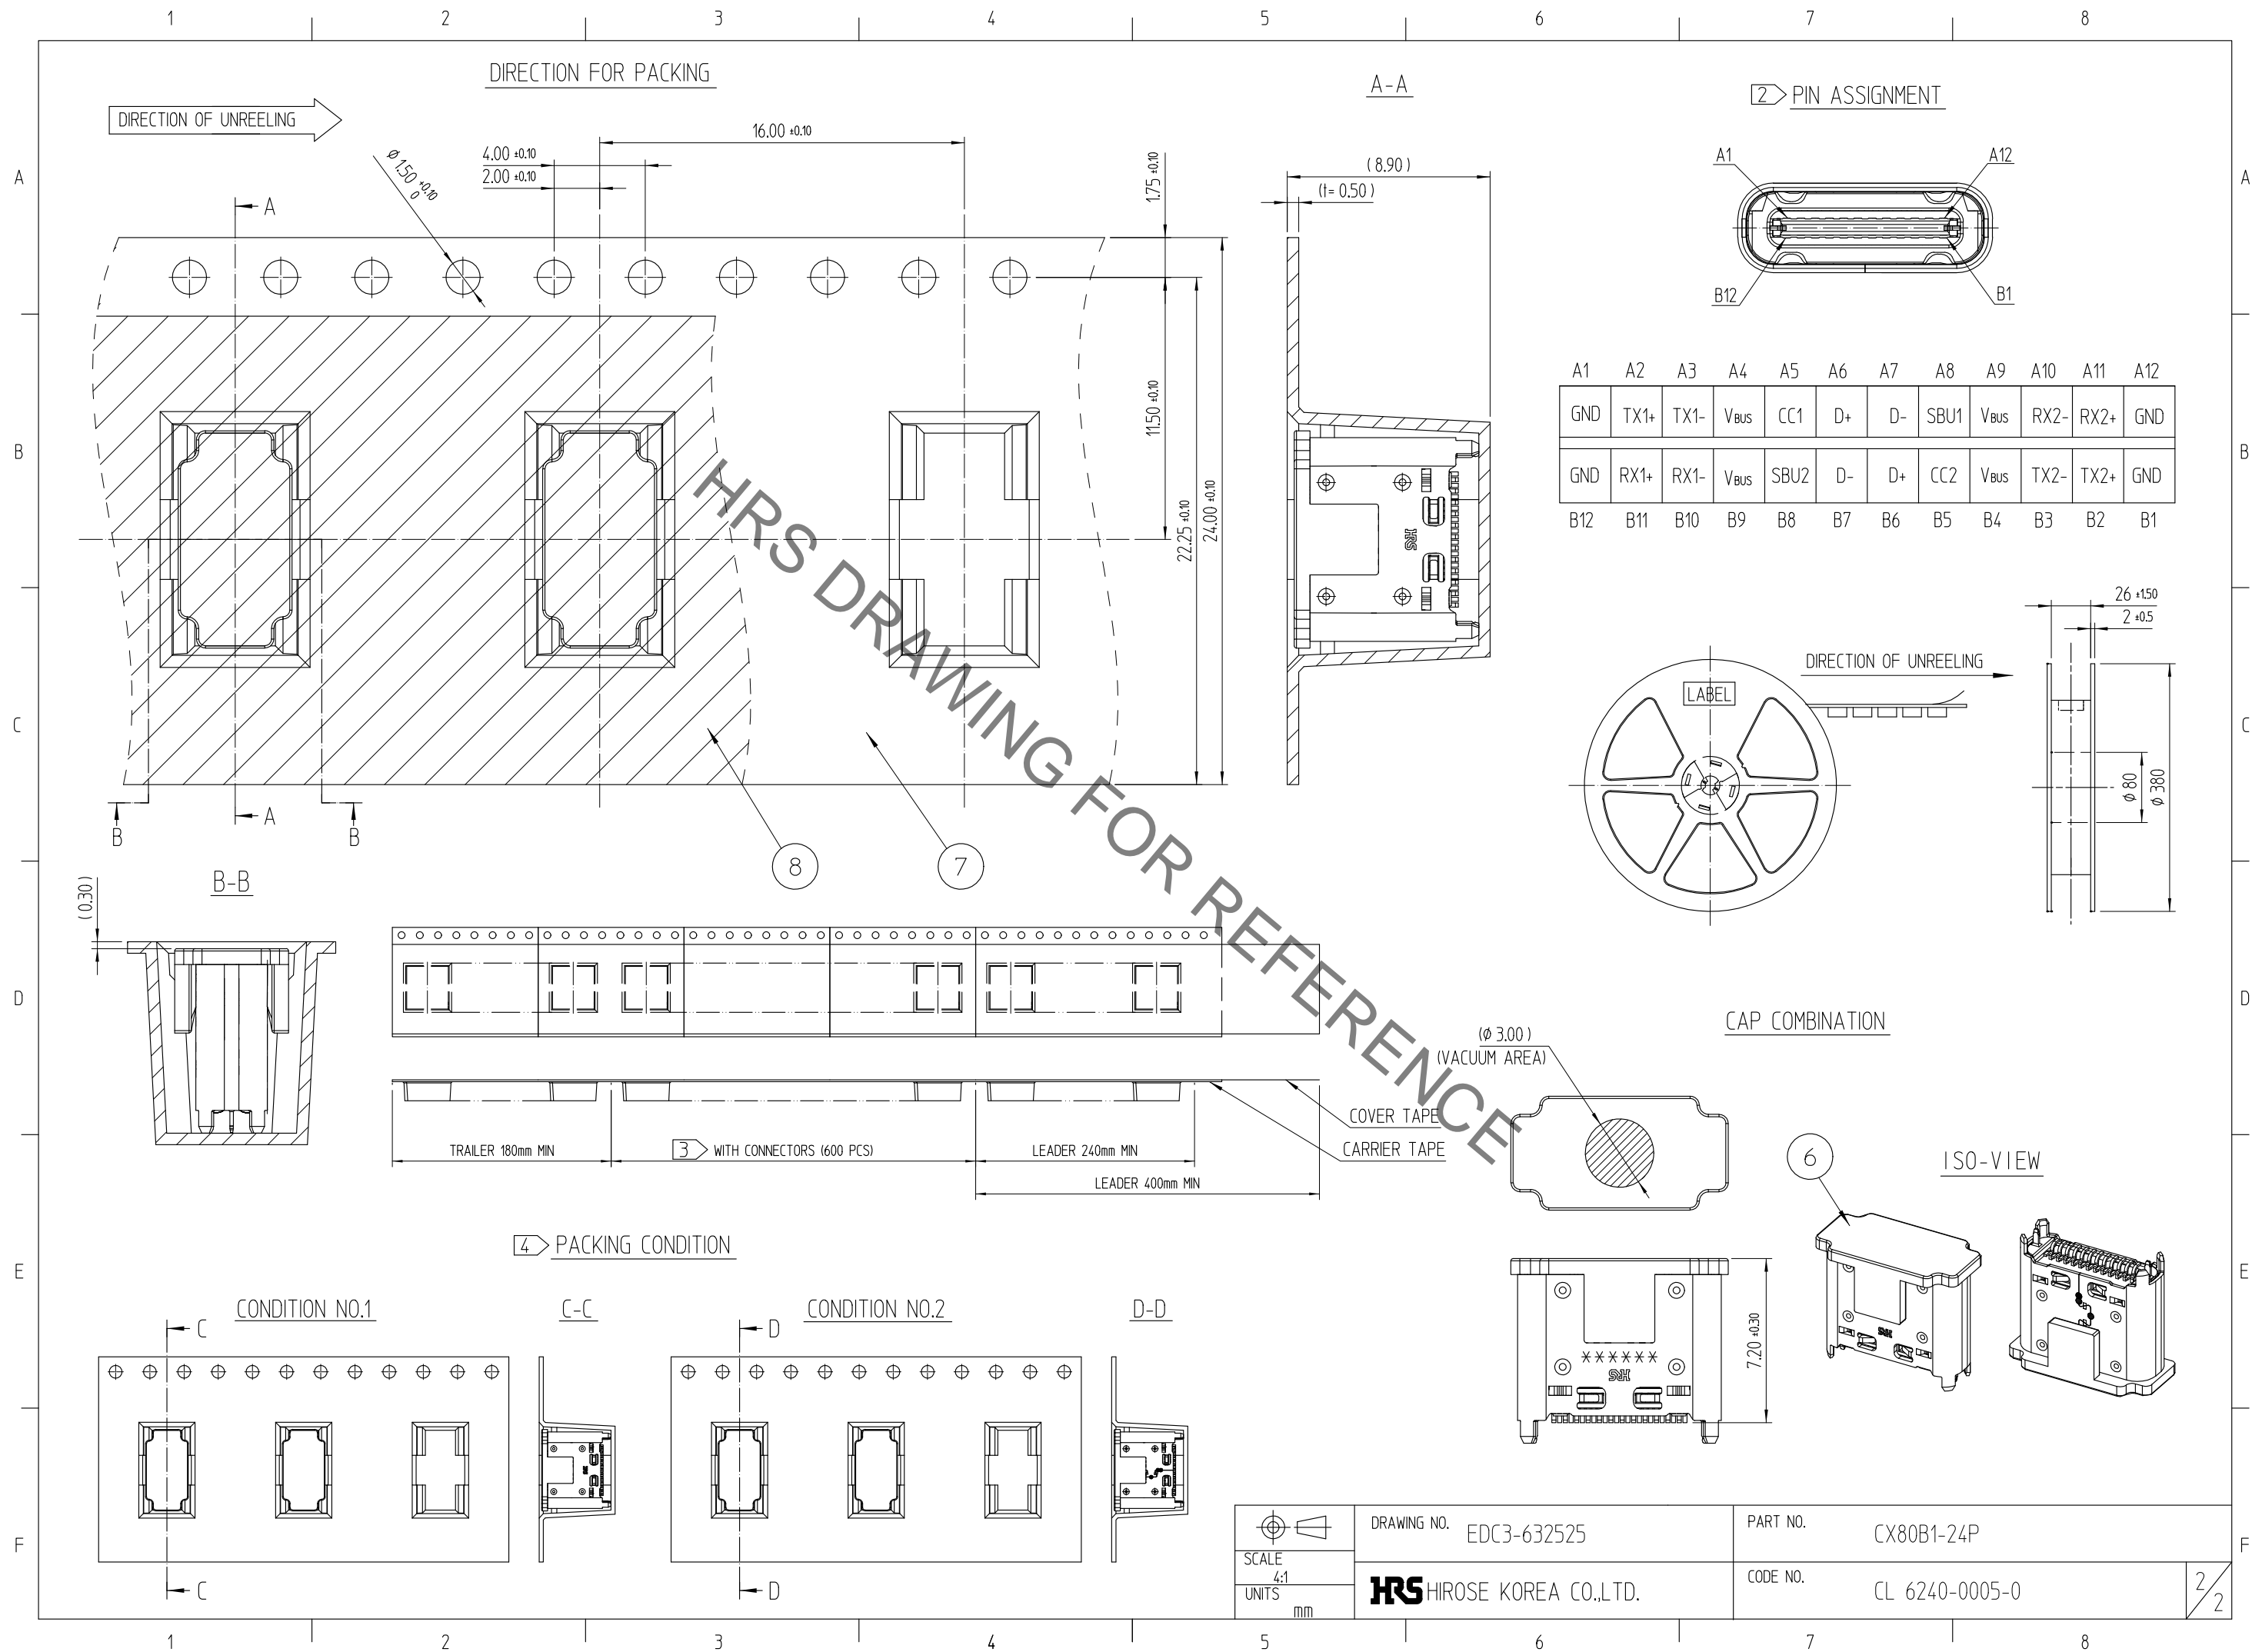

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[CX80B1-24P](#)