






△
MCU Operating voltage: 3.3V
I/O ref voltage: 3.3V
Firmware: DFU over UART

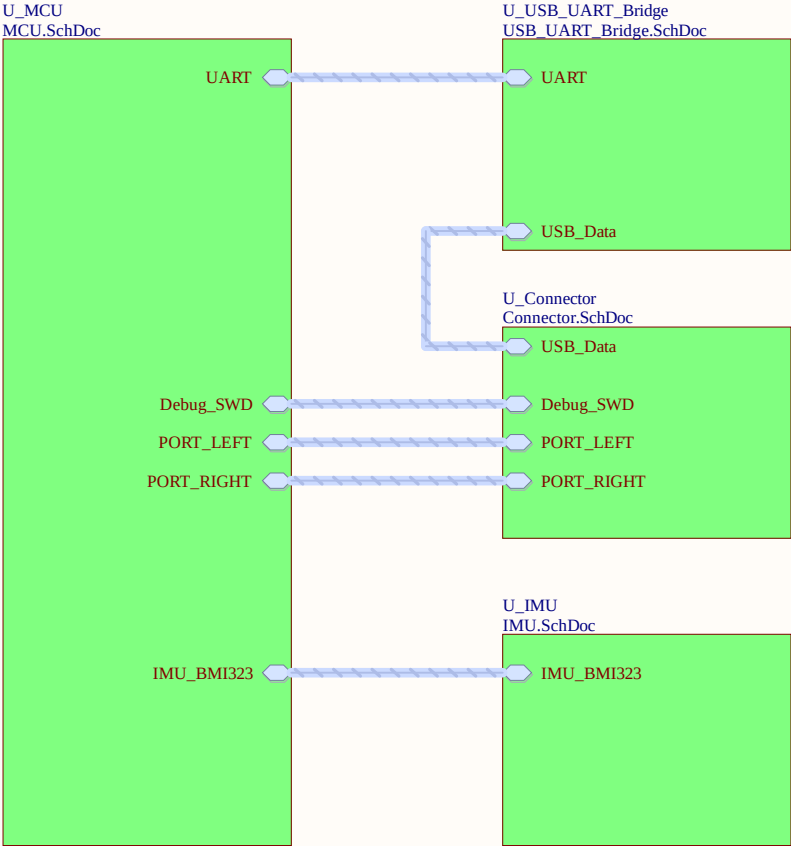



Revision History

Revision	Date	Revision summary	Author
A	06.02.2025	Initial design	vkshesham
B	25.01.2026	Fixed the layer stack and USB track impedance; Added signal layer GND pour; fixed mechanical drawing.	vkshesham
C	15.03.2026	Added Fiducials and Mounting holes; Fixed the LED resistors and cleaned up the schematic.	vkshesham


Title: nRF54L15 miniDevKit		 VKSESHAM
Author: Vamsi Krishna Sesham		
Revision: C	Size: A4	
Sheet 1 of 6	Date: 15.03.2026	

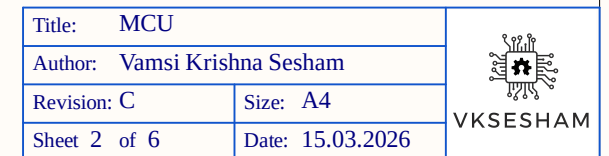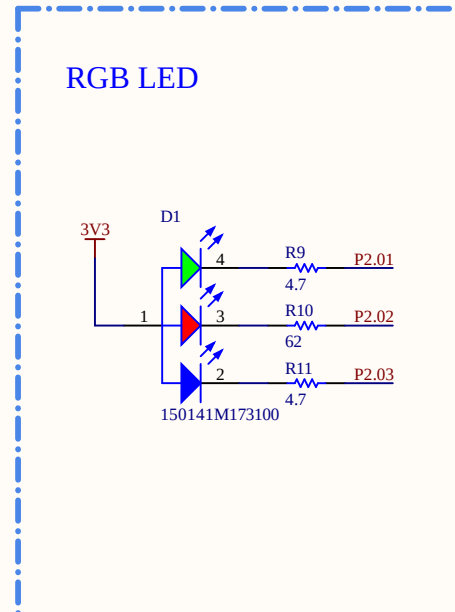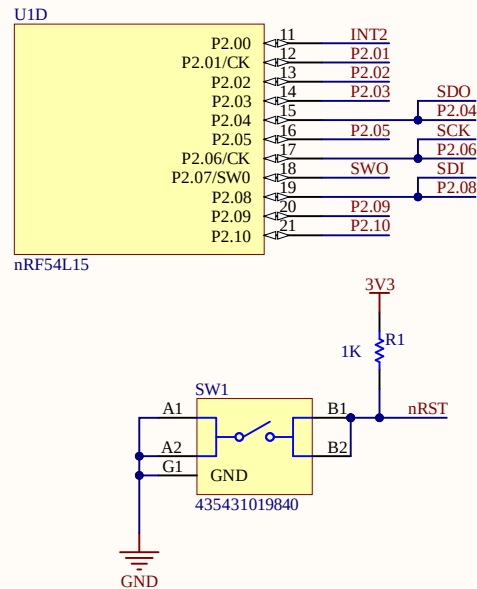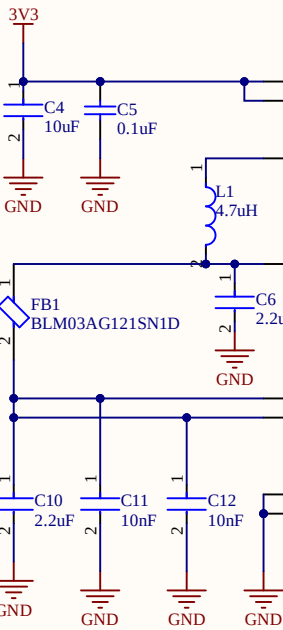


USB-C Connector

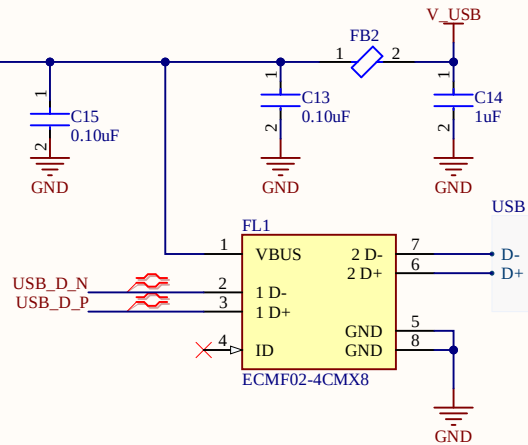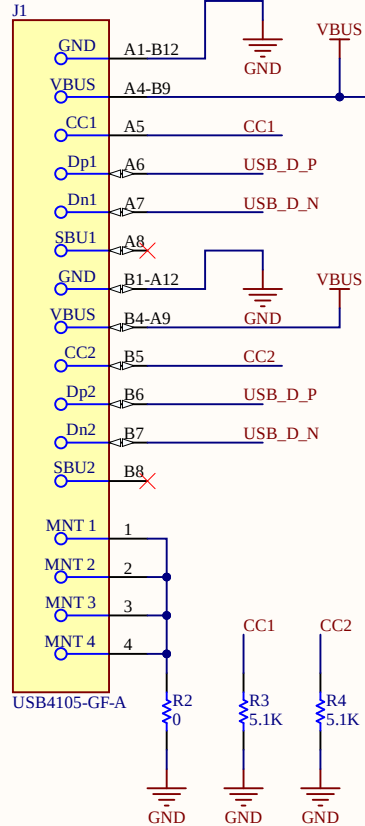


Castellated ports

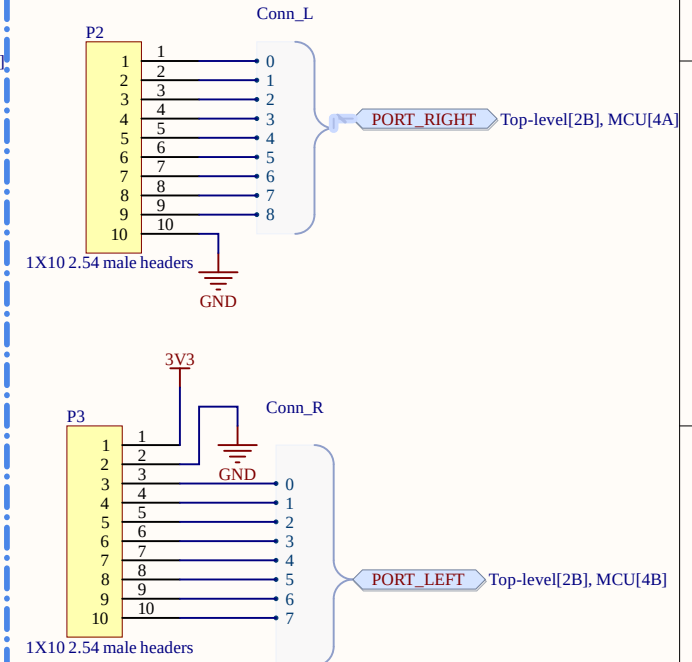


SWD Header

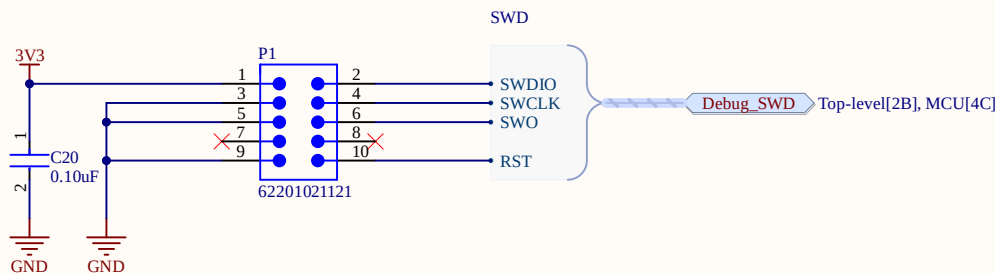

Title: Connector		 VKSESHAM
Author: Vamsi Krishna Sesham		
Revision: C	Size: A4	
Sheet 3 of 6	Date: 15.03.2026	

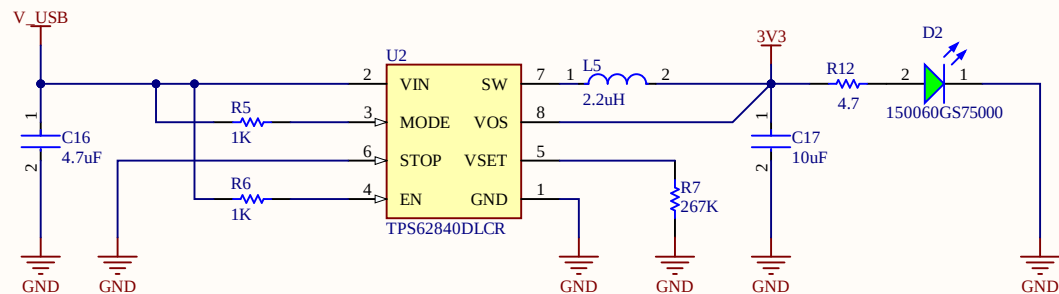


Title: Power		 VKSESHAM
Author: Vamsi Krishna Sesham		
Revision: C	Size: A4	
Sheet 4 of 6	Date: 15.03.2026	

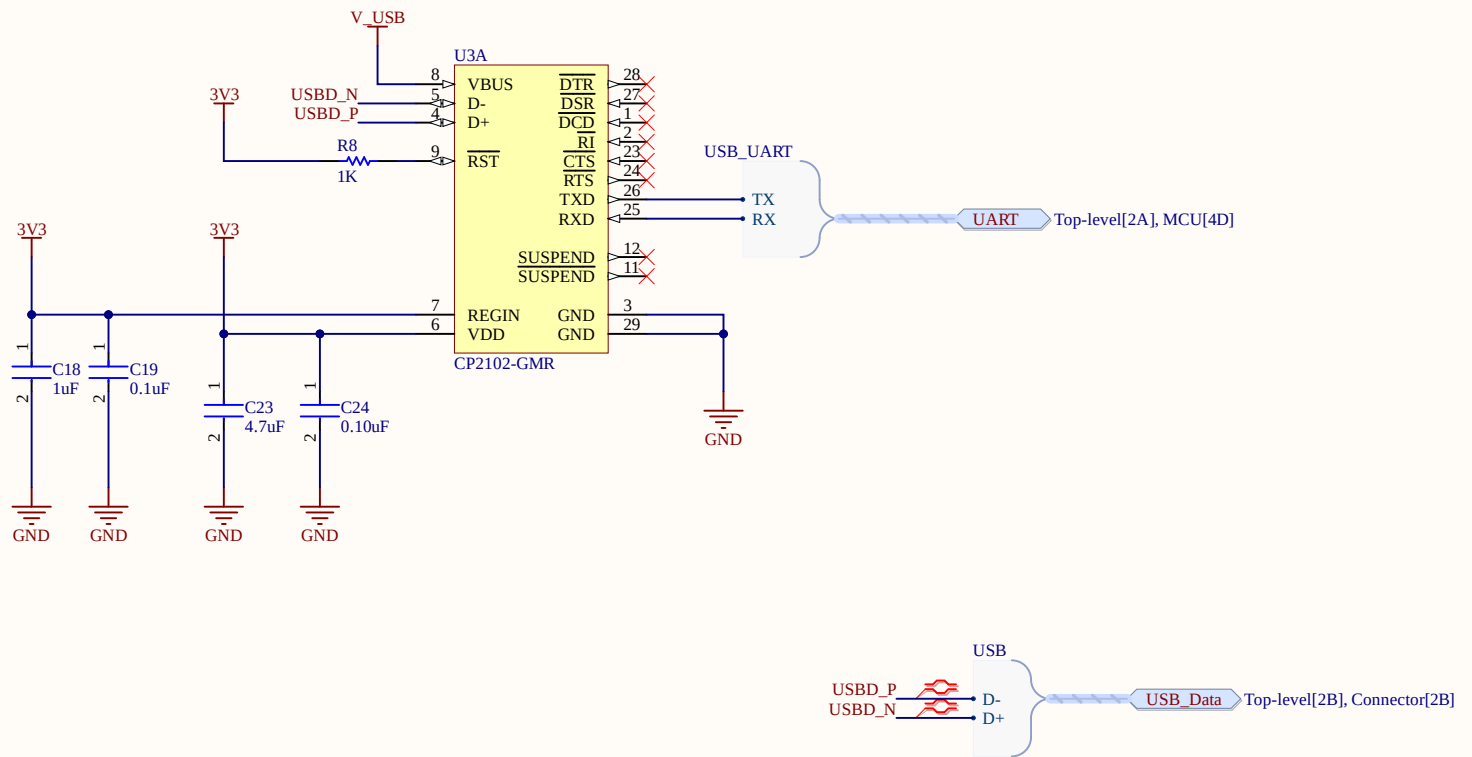



Title: USB_UART		 VKSESHAM
Author: Vamsi Krishna Sesham		
Revision: C	Size: A4	
Sheet 5 of 6	Date: 15.03.2026	

Communication protocol: SPI
Interrupt 1: P1.04
Interrupt 2: P2.00
Chip select: P1.08

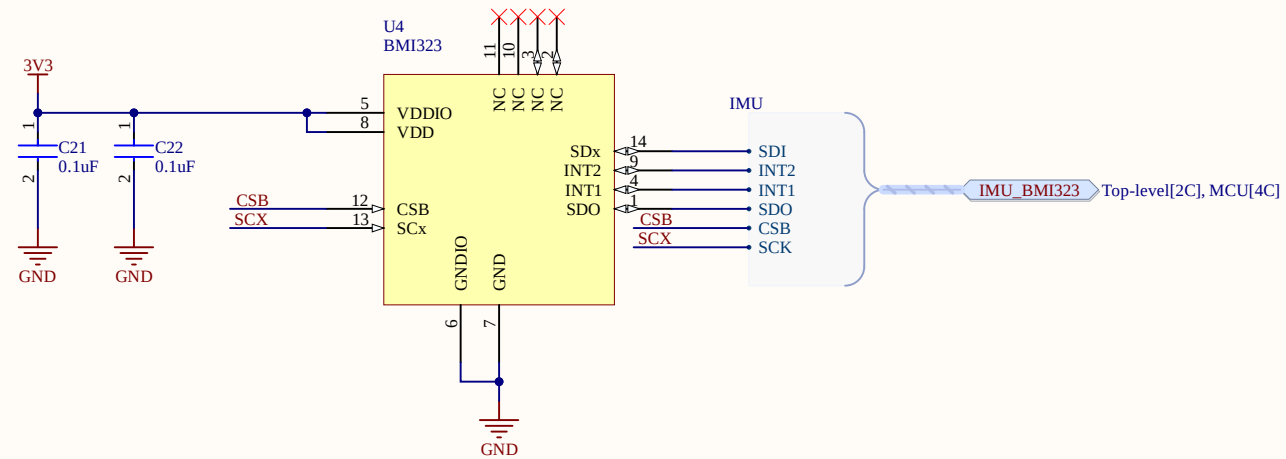

Title: IMU		 VKSESHAM
Author: Vamsi Krishna Sesham		
Revision: C	Size: A4	
Sheet 6 of 6	Date: 15.03.2026	

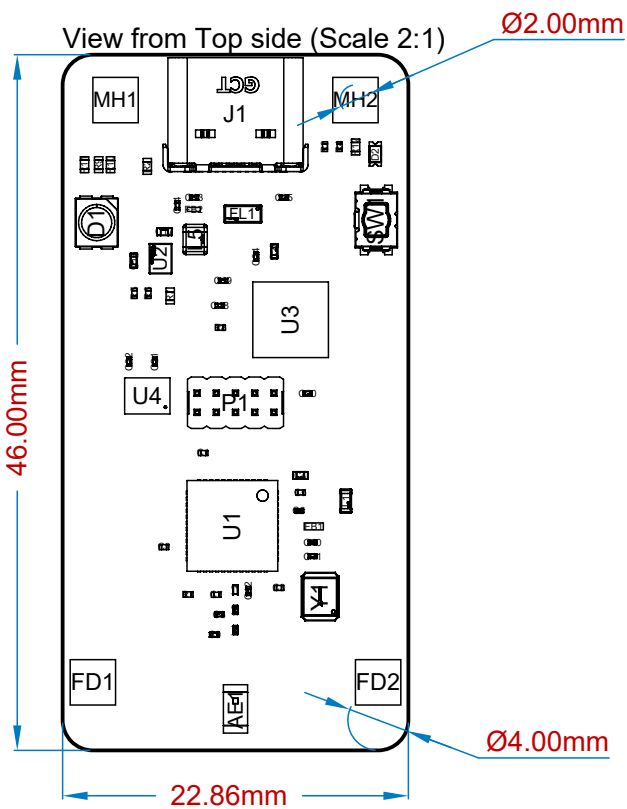

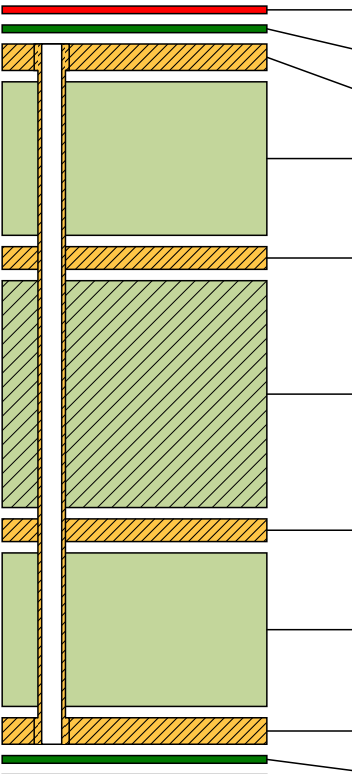	Material	Layer	Thickness	Dielectric Material	Type	Gerber
	Surface Material	Top Overlay			Legend	GTO
		Top Solder	0.01mm	Solder Resist	Solder Mask	GTS
	Copper	Top Layer (sig)	0.04mm		Signal	GTL
	Prepreg		0.20mm	PP-006	Dielectric	
	GND2	Plane (gnd)	0.03mm		Signal	G1
			1.03mm	FR-4	Dielectric	
	GND2	Plane2 (gnd)	0.03mm		Signal	G2
	Prepreg		0.20mm	PP-006	Dielectric	
	Copper	Bottom Layer (sig)	0.04mm		Signal	GBL
	Surface Material	Bottom Solder	0.01mm	Solder Resist	Solder Mask	GBS
	Bottom Overlay			Legend	GBO	

Total thickness: 1.59mm