

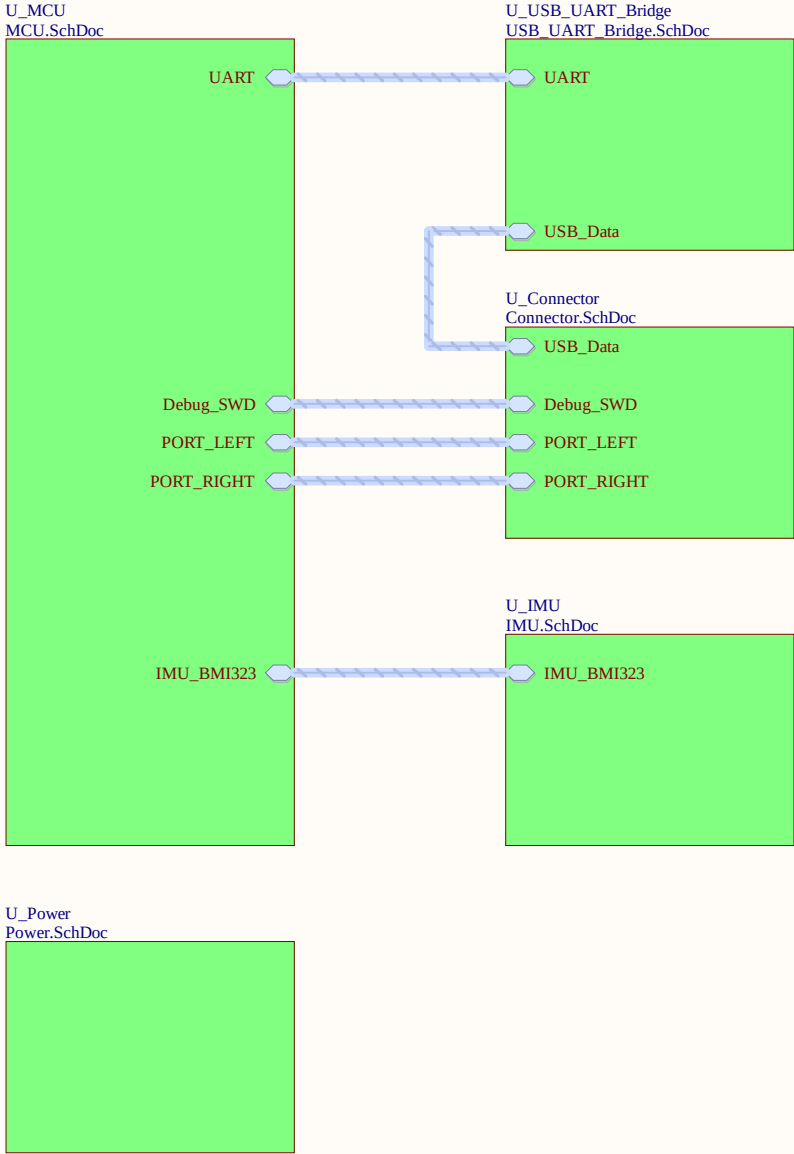
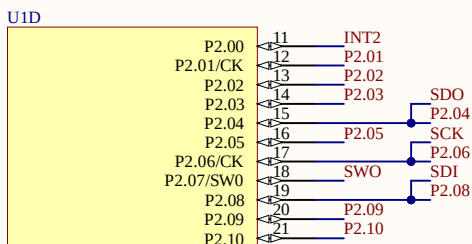
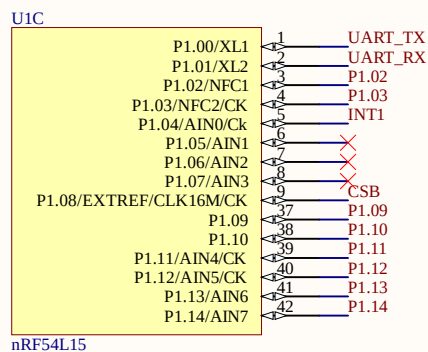


MCU Operating voltage: 3.3V
I/O ref voltage: 3.3V
Firmware: DFU over UART

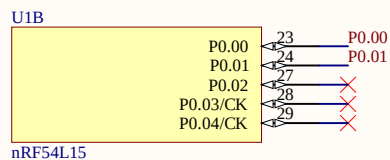


Revision History			
Revision	Date	Revision summary	Author
v1.0	06.02.2025	Initial design	vkshesham
v1.1	25.01.2026	Fixed the layer stack and USB track impedance; Added signal layer GND pour; fixed mechanical drawing.	vkshesham






MCU - nRF54L15

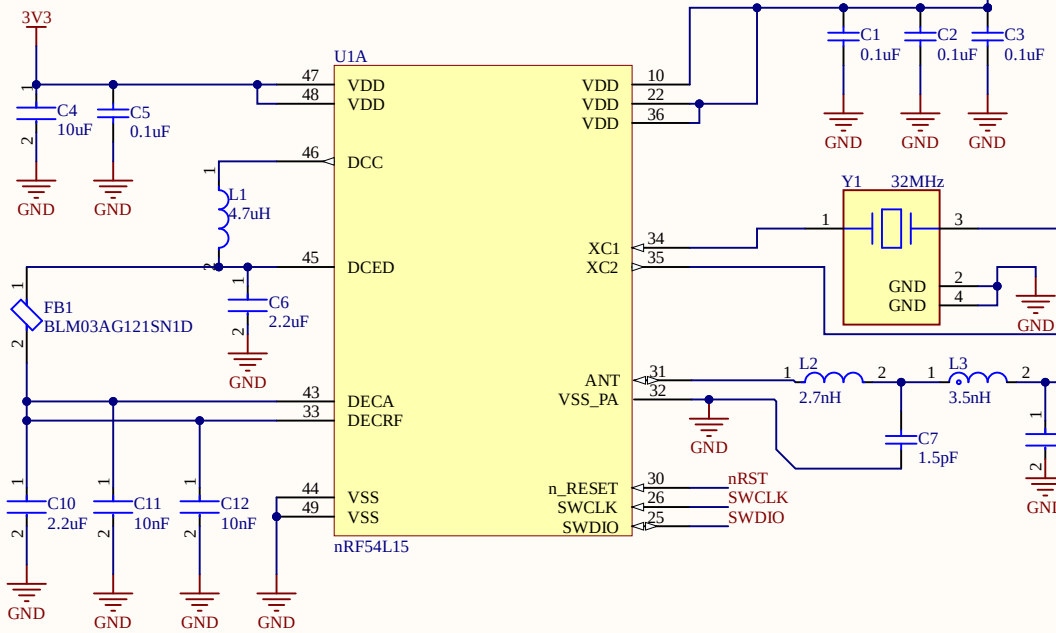

RGB LED


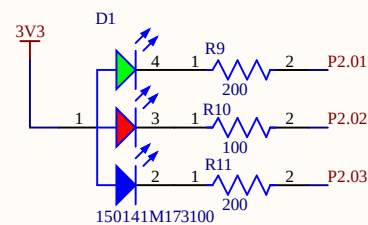


Harness section

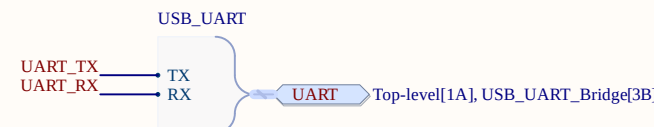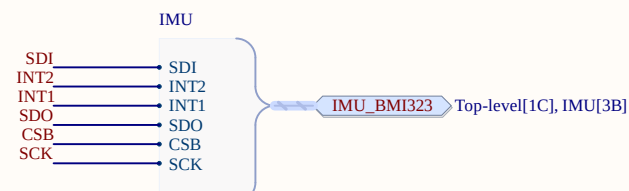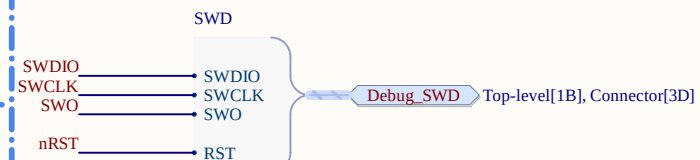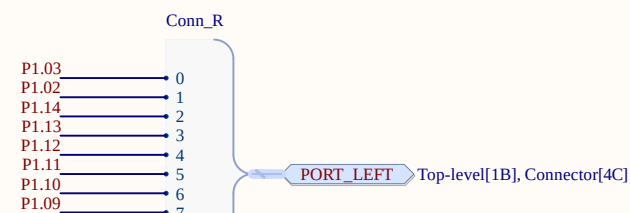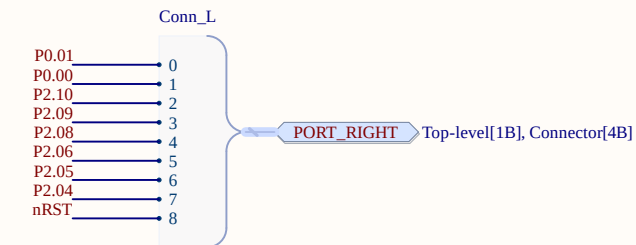


Title		
MCU		
Size	Number	Revision
A4	*	v1.0
Date:	1/25/2026	Sheet2 of 6
File:	C:\Users\...\MCU.SchDoc	Drawn By: Vamsi Krishna Sesham


USB-C Connector

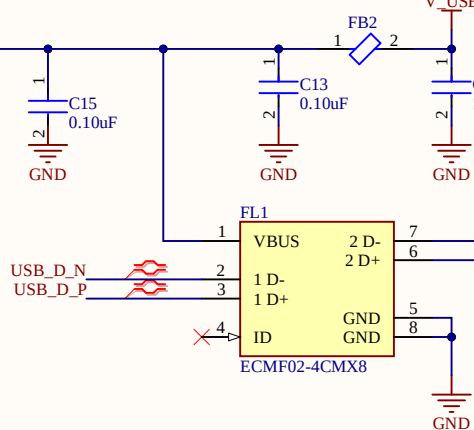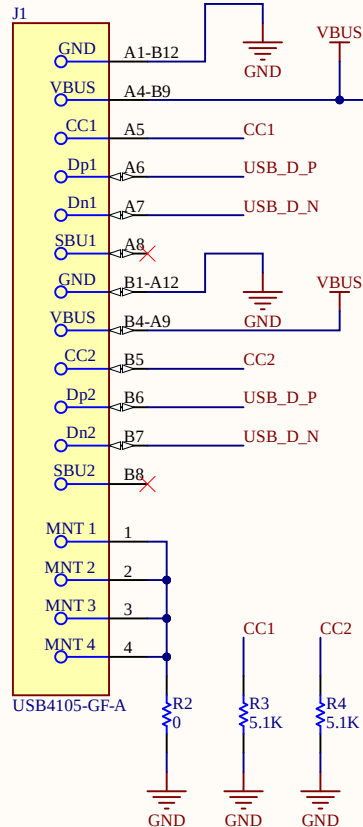


Castellated ports

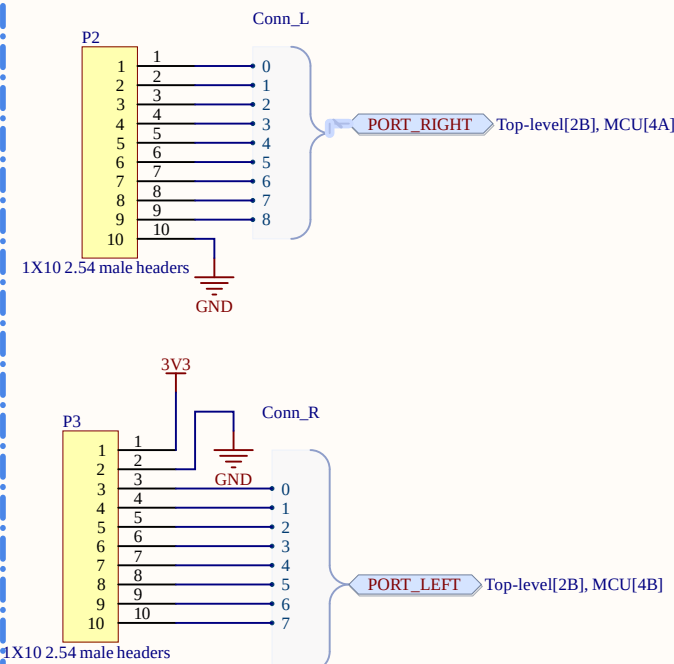


SWD Header

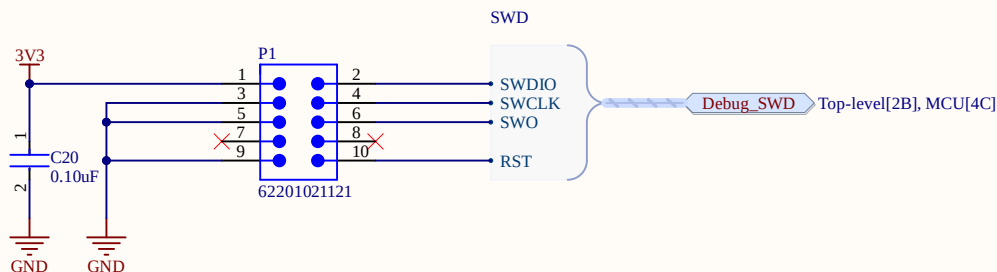

Title			
Connector			
Size	Number	Revision	
A4	*	v1.0	
Date:	1/25/2026	Sheet3 of	6
File:	C:\Users\...\Connector.SchDoc	Drawn By:	Vamsi Krishna Sesham

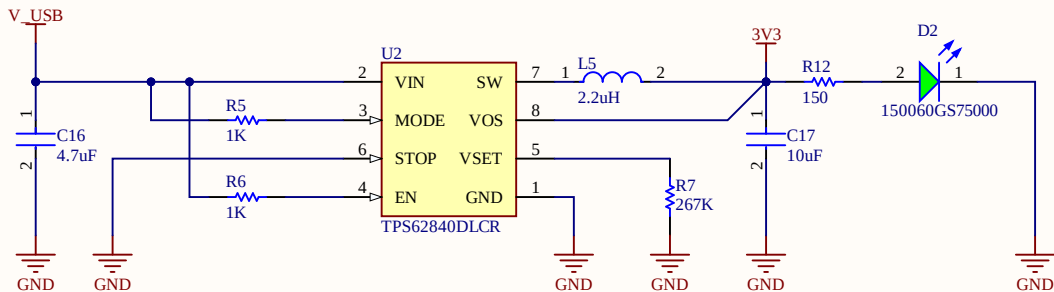

Title			
Power			
Size	Number		Revision
A4	*		v1.0
Date:	1/25/2026		Sheet4 of 6
File:	C:\Users\...\Power.SchDoc		Drawn By: Vamsi Krishna Sesham

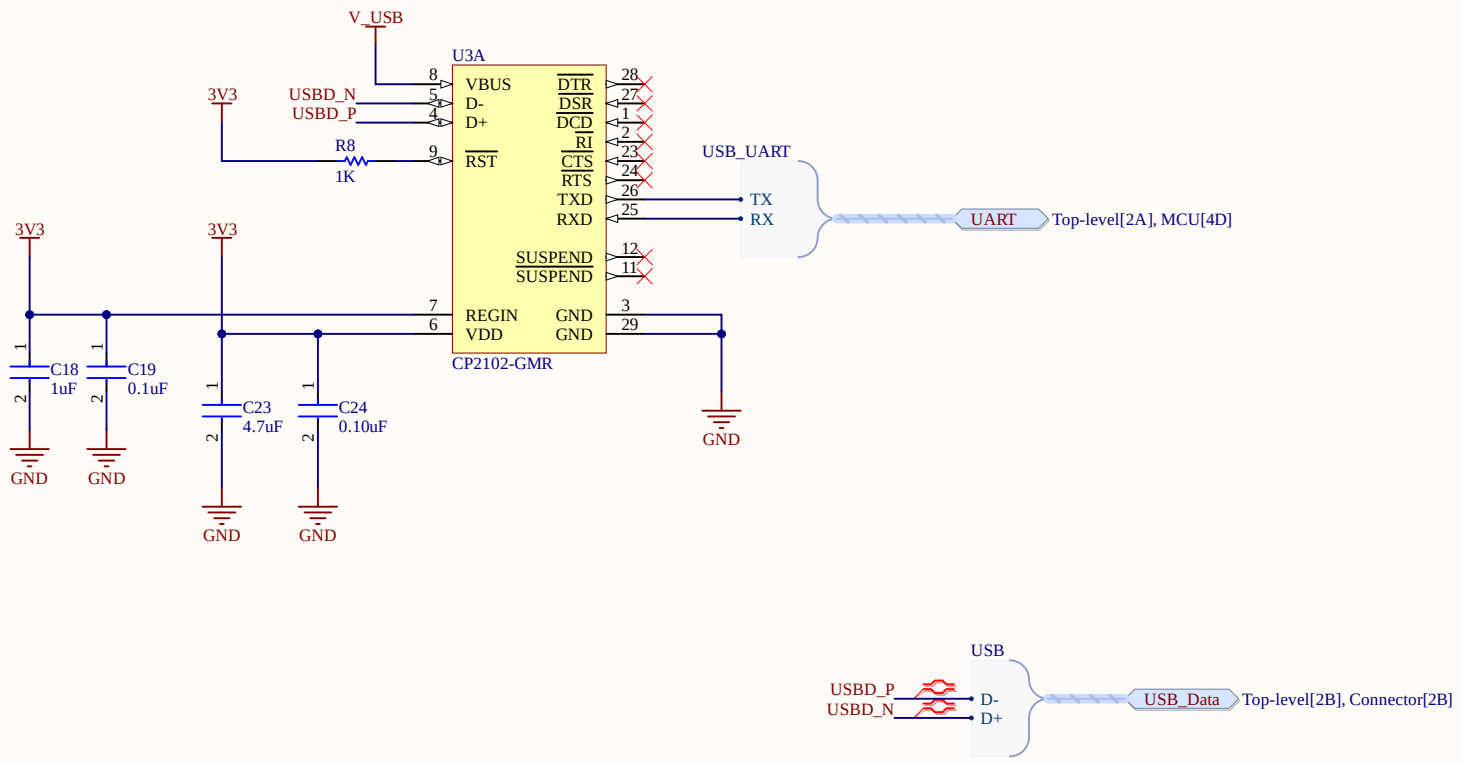

Title			
USB_UART			
Size	Number		Revision
A4	*		v1.0
Date:	1/25/2026		Sheet5 of 6
File:	C:\Users\...\USB_UART_Bridge.SchDoc		Drawn By: Vamsi Krishna Sesham

