


A Technische Daten / Technical specifications / Caractéristiques techniques / Dati tecnici / Datos técnicos / Technische gegevens / Tekniska data / Dane techniczne


Type	VPU II							VPU II LCF
	N-PE	L-N						L-N
U _n	260 V	75 V	150 V	280 V	400 V	600 V	750 V	280 V
Grid	N-PE spark gap	–	130/230 V, 50 Hz, TN, TT	230/400 V, 50 Hz, TN, TT	230/400 V, 50 Hz, TN, TT	400/690 V, 50 Hz, TN, TT	400/690 V, 50 Hz, TN, TT	230/400 V, 50 Hz, TN, TT
U _{OC} [T3]	10 kV	10 kV						10 kV
I _n / I _{max} [T2]	20 / 40 kA	15 / 30 kA	20 / 40 kA	20 / 40 kA	20 / 40 kA	12.5 / 25 kA	12.5 / 25 kA	20 / 40 kA
I _{SCCR}	–	25 kA						25 kA
I _{PE}	0 µA	30 µA						0 µA
U _P @ I _n	≤ 1.5 kV	≤ 0.65 kV	≤ 0.9 kV	≤ 1.55 kV	≤ 2.1 kV	≤ 2.35 kV	≤ 2.6 kV	≤ 1.8 kV
U _C	260 V	75 V	150 V	280 V	400 V	600 V	750 V	280 V
F2  gL/gG max	–	≤ 125 A						≤ 125 A
min	2.5 mm ² 	2.5 mm ² 	2.5 mm ² 	I = 15 mm / 2 Nm...3 Nm				
max		50 mm ² 	25 mm ² 	I = 15 mm / 2 Nm...3 Nm				
Cross-connection	16 mm ² CU  15 mm							
R ¹⁾	U _n = 250 Vac / 1 A	U _n = 24 Vdc / 0.1 A	0.14...1.5 mm ² / I = 8 mm					
T _A	-40 °C...+70 °C							
Protection degree	IP20							
L x W ²⁾ x H	106 x (1 HP) x 75 mm	106 x (1...4 HP) x 75 mm	106 x (1...4 HP) x 75 mm	106 x (1...4 HP) x 75 mm	106 x (1...4 HP) x 75 mm	106 x (1...4 HP) x 75 mm	106 x (1...4 HP) x 75 mm	106 x (1 HP) x 75 mm
Spare arrestor	1351180000	1350530000	1352450000	1352570000	1352820000	1352930000	1351030000	1351100000

1) R = remote signal contact
2) horizontal pitch (HP), 1 HP = 17,8 mm


B Montage / Mounting / Montage / Montaggio / Montaje / Montage / Montering / Montaż

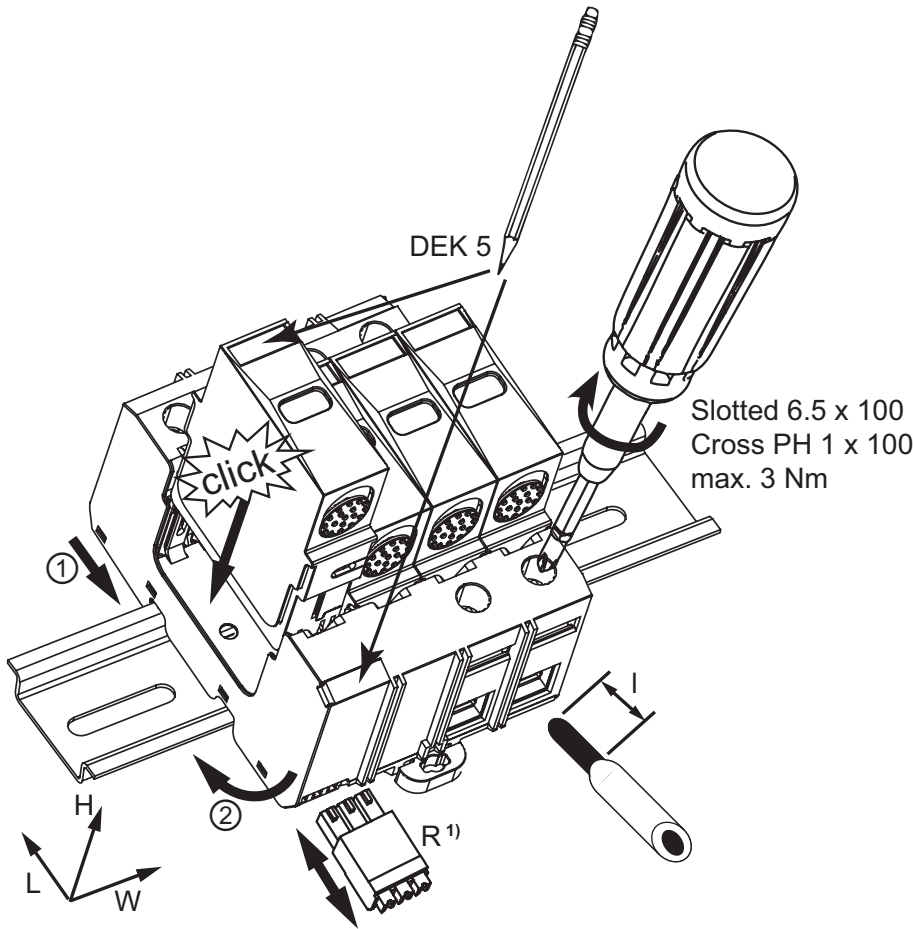


C Monitoring / Monitoring / Surveillance / Monitoring / Monitorización / Onderhoud / Övervakning / Monitorowanie

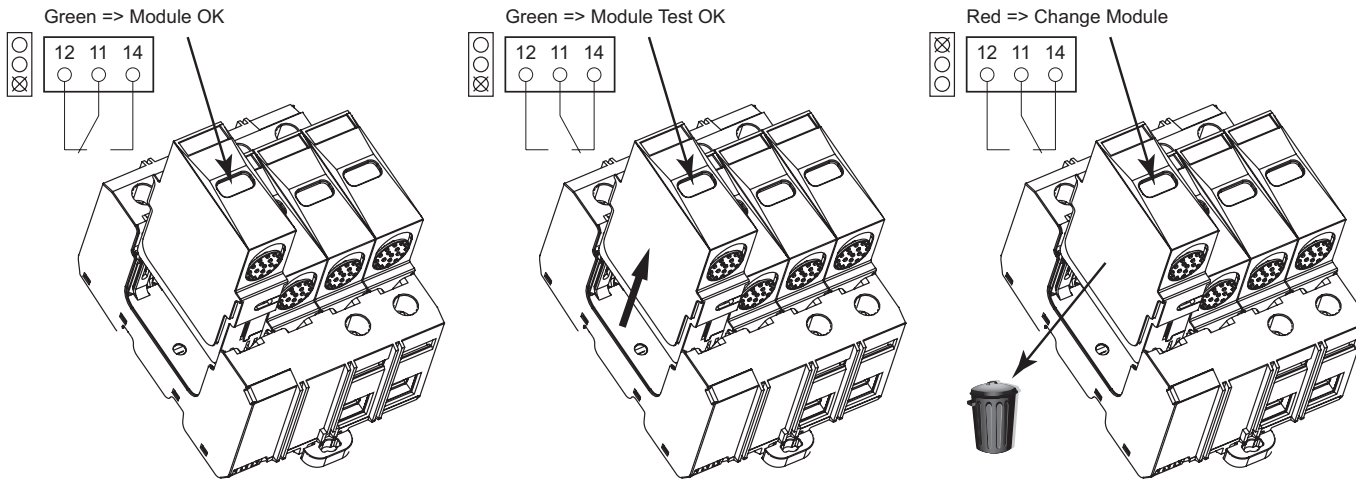

D Applikation / Application / Application / Applicazione / Aplicación / Toepassing / Applikation / Schemat aplikacyjny

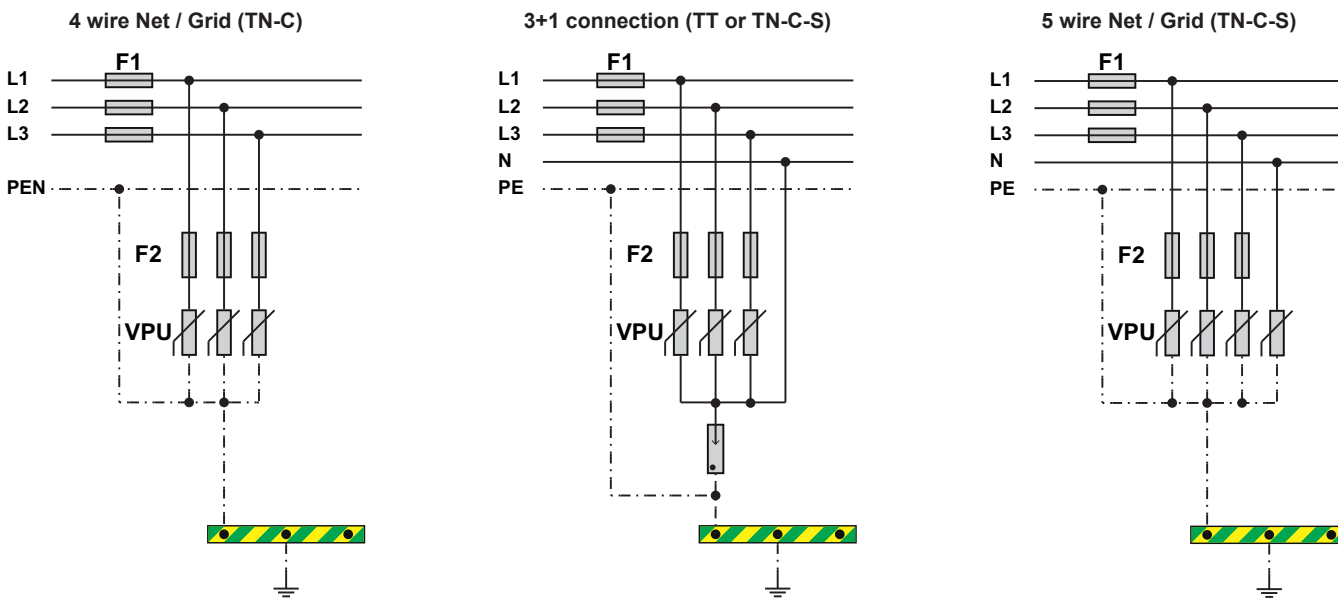

E PE-Verkabelung / PE cabling / Câblage PE / Cablaggio PE / Cableado PE / PE-bekabeling / PE-ledningsdragning / Okablowanie PE

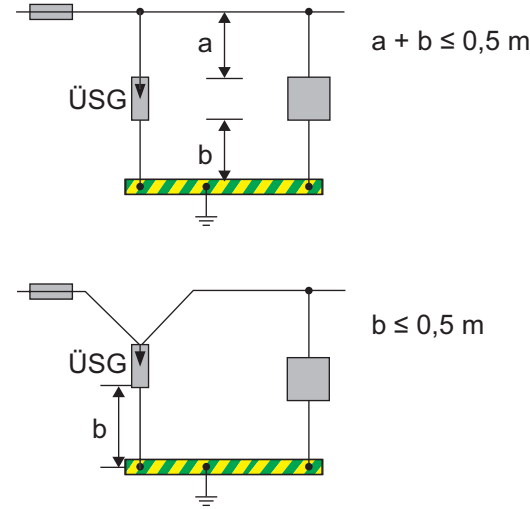


- de** Installationsanleitung VPU II
- en** Installation instruction VPU II
- fr** Consignes d'installation VPU II
- it** Istruzioni per l'installazione VPU II
- es** Instrucciones para la instalación VPU II
- nl** Installatiehandleiding VPU II
- sv** Installationsanvisning VPU II
- pl** Instrukcja instalacji VPU II



R.T.Nr. 1377830000/02/05.13

F Koordination / Coordination / Coordination / Coordinamento / Coordinación / Coördinatie / Koordinering / Koordynacja IEC 62305-4

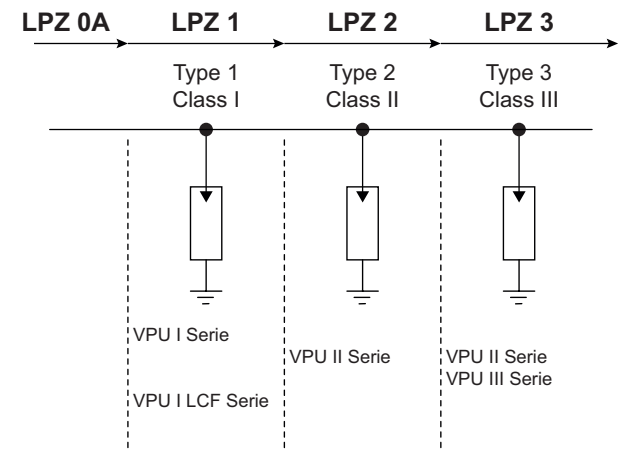

G Zulassungen / Approvals / Autorisations / Approvazioni / Homologaciones / Certificaten / Godkännanden / Świadectwa dopuszczenia

Overvoltage protection Class II and III for U_c = 280V with U_{oc} = 6 kV

CE
Test Class II/III: IEC 61643-11
Type 2/3: EN 61643-11
OVE, CCA, CB

