
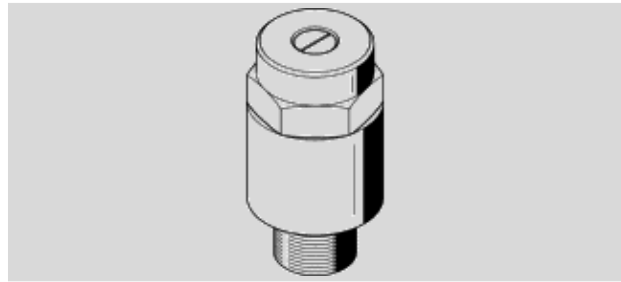


Data sheet: Exhaust air flow control valve GRE-1/4 – 10352

FESTO

Function



Feature	values
Valve function	Flow control – silencer function
Pneumatic connection, port 1	G1/4
Adjusting element	Slotted head screw
Mounting type	Threaded
Standard nominal flow rate in flow control direction	996 l/min
Standard flow rate 6 -> 0 bar	0 - 996 l/min
Operating pressure	0 - 10 bar
Ambient temperature	-10 - 70 °C
Operating medium	Compressed air, filtered, unlubricated Filtered, lubricated air
Assembly position	Any
Medium temperature	-10 - 70 °C
Product weight	25 g
Materials information for screw-in stud	Wrought Aluminium alloy
Materials information for seals	NBR
Regulating screw material data	Brass