
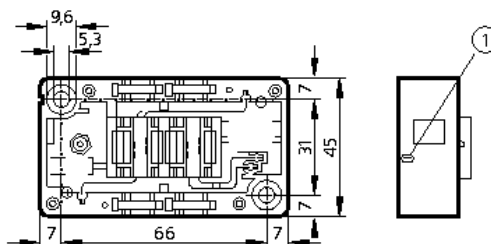


AC5020

Module lower part flat cable
Mounting on DIN rail and panel
Quick mounting technology for
AS-i flat cable

With earthing lead

AS-i interface to module upper
part



1: earthing lead

Electrical design	FC coupling module
Operating voltage [V]	26.5...31.6 DC (AS-i) / 24 DC
Contact rating	< 2 A
Operating temperature [°C]	-25...85
Protection	IP 67 *)
Housing material	Pocan
Connection	via contact pins in the unit
Remarks	*) IP 20 / IP 65 / IP 67 depending on the upper part used Recommended sleeve for earthing lead: A 2.8 x 0.5 DIN 46247 This module lower part can be used in conjunction with upper parts where pin 5 of the M12 socket is connected to functional earth (FE).