


LMT110

LMACE-A12E/QPKG/1/US

Level sensors

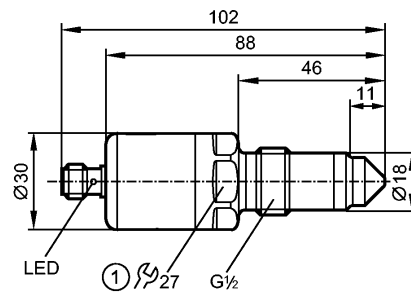

1: tightening torque 20...25 Nm



EHEDG Certified



Made in Germany

Product characteristics

Electronic level sensor

Connector

Process connection: G 1/2 A

Gold-plated contacts

Probe length: 11 mm

2 switching outputs

Application

Application oils, grease

Recommended media oils, grease

Cannot be used for: water, water-based media

Medium temperature oil

- Continuous [°C] 0...100

- Short time [°C] 0...150 (1 h)

Electrical data

Electrical design DC PNP

Operating voltage [V] 18...30 DC

Current consumption [mA] < 40

Protection class III

Reverse polarity protection yes

Outputs

Output 2 switching outputs

Output function normally open / closed complementary

Current rating [mA] 50

Voltage drop [V] < 2.5

Short-circuit protection pulsed

Overload protection yes

Environment

Ambient temperature [°C] 0...60

Storage temperature [°C] -25...80

Maximum vessel pressure [bar] -1...16

Protection IP 68 / IP 69K

Tests / approvals

EMC IEC 61000-6-2 : 2005
IEC 61000-6-4 : 2006 / (open tanks)

LMT110

LMACE-A12E/QPKG/1/US

Level sensors

	IEC 61000-6-3	: 2006 / (closed tanks)
Shock resistance	IEC 60068-2-27:	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6:	20 g (10...2000 Hz)
MTTF [Years]		469.99

Mechanical data

Process connection	G ½ A
Materials (wetted parts)	PEEK; surface characteristics: Ra < 0.8
Housing materials	1.4404; PEEK; PA12-GF30; FKM
Weight [kg]	0.173


Displays / operating elements

Display	Switching status LED yellow
---------	-----------------------------

Electrical connection

Connection	M12 connector; Gold-plated contacts
------------	-------------------------------------

Wiring



Remarks

Pack quantity [piece]	1
-----------------------	---