


## PN16 Cast Iron "Y" Strainer

### Features

- Flange Mounting PN16 Only
- BS EN 558-1 Series 1

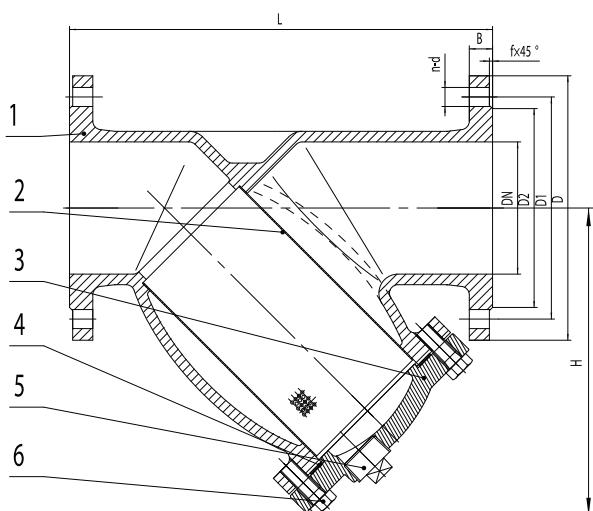


### Technical Data

Maximum Pressure 16 Bar  
Working Temperature -10°C to +230°C

Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.

### Pressure/Temperature

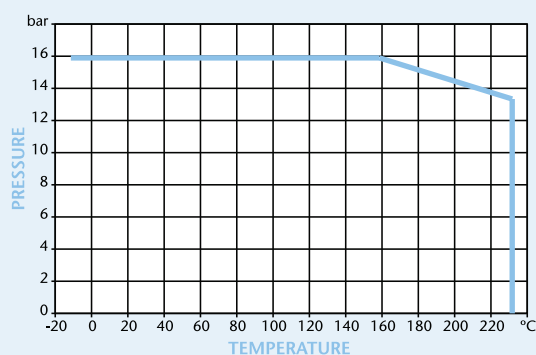

| DN   | 50   | 65   | 80   | 100  | 125  | 150  | 200   | 250   | 300   |
|------|------|------|------|------|------|------|-------|-------|-------|
| L    | 230  | 290  | 310  | 350  | 400  | 480  | 600   | 730   | 850   |
| D    | 165  | 185  | 200  | 220  | 250  | 285  | 340   | 405   | 460   |
| D1   | 125  | 145  | 160  | 180  | 210  | 240  | 295   | 355   | 410   |
| D2   | 99   | 118  | 132  | 156  | 184  | 211  | 266   | 319   | 370   |
| B    | 20   | 20   | 22   | 24   | 26   | 26   | 30    | 32    | 32    |
| f    | 3    | 3    | 3    | 3    | 3    | 3    | 3     | 3     | 4     |
| n-d  | 4-19 | 4-19 | 8-19 | 8-19 | 8-19 | 8-23 | 12-23 | 12-28 | 12-28 |
| H    | 156  | 176  | 199  | 240  | 292  | 320  | 399   | 516   | 568   |
| Mesh | 1.5  | 1.5  | 1.5  | 1.5  | 1.5  | 1.5  | 1.5   | 1.5   | 1.5   |
| Kgs  | 10.1 | 14   | 20.3 | 26.6 | 39.8 | 57   | 97    | 164   | 234   |

| N. | Part Name | Materials       |
|----|-----------|-----------------|
| 1  | Body      | Cast Iron GG25  |
| 2  | Screen    | Stainless Steel |
| 3  | Bonnet    | Cast Iron       |
| 4  | Gasket    | Graphite        |
| 5  | Plug      | Cast Brass      |
| 6  | Bolt      | Steel           |