

2.6 Module supply cable

2.6.1 Order data

Length	Short description, model number					
	Power connection cable		Power attachment cable		Power open cable	
0.2 m	X67CA0P00.0002	X67CA0P10.0002	X67CA0P20.0002	X67CA0P30.0002	X67CA0P40.0002	X67CA0P50.0002
1.0 m	X67CA0P00.0010	X67CA0P10.0010				
2.0 m	X67CA0P00.0020	X67CA0P10.0020	X67CA0P20.0020		X67CA0P40.0020	X67CA0P50.0020
5.0 m	X67CA0P00.0050	X67CA0P10.0050	X67CA0P20.0050	X67CA0P30.0050	X67CA0P40.0050	X67CA0P50.0050
10.0 m	X67CA0P00.0100	X67CA0P10.0100				
15.0 m	X67CA0P00.0150	X67CA0P10.0150	X67CA0P20.0150	X67CA0P30.0150		
50.0 m			X67CA0P20.0500	X67CA0P30.0500		
Page	687	688	689	690	691	692
						

Table 556: X67CA0Pxx module supply cable - Order data

Length	Short description, model number			
	Power connection cable, can be used in drag chains		Power attachment cable, can be used in cable drag chains	
5.0 m	X67CA3P00.0050	X67CA3P10.0050		
10.0 m	X67CA3P00.0100	X67CA3P10.0100		
20.0 m			X67CA3P20.0200	X67CA3P30.0200
Page	693	694	695	696
				

Table 557: X67CA3Pxx module supply cable - Order data

2.6.2 Technical data

Product ID	Module supply cable	
General information	Standard	Can be used in cable drag chains
Cable cross section mm ² AWG	4 x 0.34 mm ² 4 x 22AWG	4 x 0.34 mm ² 4 x 22AWG/42
Durability	Good chemical and oil resistance	Good chemical and oil resistance Flame resistant UV resistant
Lines (wires)		
Lines	Fine-stranded wires 0.34 mm ² (22 AWG) Class 6 (42 x 0.1 mm / 42 x 38 AWG)	Fine-stranded wires 0.34 mm ² (22 AWG) Class 6 (42 x 0.1 mm / 42 x 38 AWG)
Wire insulation	PVC	TPM (PP) 9Y
Characteristics	Free of CDC, cadmium and lead	
Wire colors	Brown, black, blue, white	
Cable structure		
Lines Stranding Shield	4-wire twisted pair No	4-wire twisted pair No
Outer sheathing Material Characteristics Color Labeling	Double jacket PUR / PVC Free of CDC, cadmium and lead Black B&R X67CA0Pxx.xxxx	PUR Free of CDC, halogen, cadmium, silicon and lead Black B&R X67CA3Pxx.xxxx
Electrical characteristics		
Degree of insulation	Category II according to IEC 60664-1	Category II according to IEC 60664-1
Installed voltage	Max. 60 V AC/DC	Max. 60 V AC/DC
Rated current	Max. 4 A / contact	Max. 4 A / contact
Mechanical characteristics		
Protection type - plug/coupling	IP67, only when screwed in	IP67, only when screwed in
Temperature range With fixed installation With flexible installation	-25 to +70°C -5 to +70°C	-25 to +80°C -25 to +80°C
Outer diameter	5.2 mm ±0.2 mm	4.7 mm ±0.2 mm
Flex radius	≥ 10 x outer diameter	≥ 10 x outer diameter
Drag chain data Speed Acceleration Flex cycles	- - -	Max. 3.3 m/s at 5 m horiz. traverse path distance Max. 5 m/s ² >2 million
Robot data Torsional strain	-	±180°/m

Table 558: Module supply cable - Technical data

2.6.3 X67CA0P00.xxxx

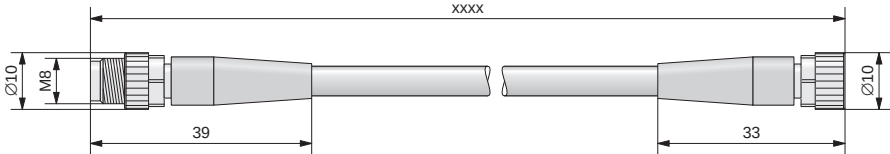


Dimensions				
				
Pin assignments				
4-pin M8 plug	Pin	Name	Wire colors	4-pin M8 socket
	1	24 VDC	Brown	
	2	24 VDC	White	
	3	GND	Blue	
	4	GND	Black	

Table 559: X67CA0P00 module supply connection cable - Measurements and pin assignments

Cable lengths			
Model number	Standard length [dm]	Actual length [cm]	Tolerance [cm]
X67CA0P00.0002	2	25	+2
X67CA0P00.0010	10	100	+2
X67CA0P00.0020	20	200	+5
X67CA0P00.0050	50	500	+10
X67CA0P00.0100	100	1000	+10
X67CA0P00.0150	150	1500	+10

Table 560: X67CA0P00 module supply connection cable - Cable lengths

2.6.4 X67CA0P10.xxxx

Dimensions				
Pin assignments				
4-pin M8 plug	Pin	Name	Wire colors	4-pin M8 socket
	1	24 VDC	Brown	
	2	24 VDC	White	
	3	GND	Blue	
	4	GND	Black	

Table 561: X67CA0P10 module supply connection cable - Measurements and pin assignments

Cable lengths			
Model number	Standard length [dm]	Actual length [cm]	Tolerance [cm]
X67CA0P10.0002	2	25	+2
X67CA0P10.0010	10	100	+2
X67CA0P10.0020	20	200	+5
X67CA0P10.0050	50	500	+10
X67CA0P10.0100	100	1000	+10
X67CA0P10.0150	150	1500	+10

Table 562: X67CA0P10 module supply connection cable - Cable lengths

2.6.5 X67CA0P20.xxxx

Dimensions				
				
Pin assignments				
4-pin M8 socket	Pin	Name	Wire colors	Open
	1	24 VDC	Brown	For custom wiring
	2	24 VDC	White	
	3	GND	Blue	
	4	GND	Black	

Table 563: X67CA0P20 module supply attachment cable - Measurements and pin assignments

Cable lengths			
Model number	Standard length [dm]	Actual length [cm]	Tolerance [cm]
X67CA0P20.0002	2	25	+2
X67CA0P20.0020	20	200	+10
X67CA0P20.0050	50	500	+10
X67CA0P20.0150	150	1500	+10
X67CA0P20.0500	500	5000	+10

Table 564: X67CA0P20 module supply attachment cable - Cable lengths

Both wires must be used due to the distribution of the current load.

2.6.6 X67CA0P30.xxxx

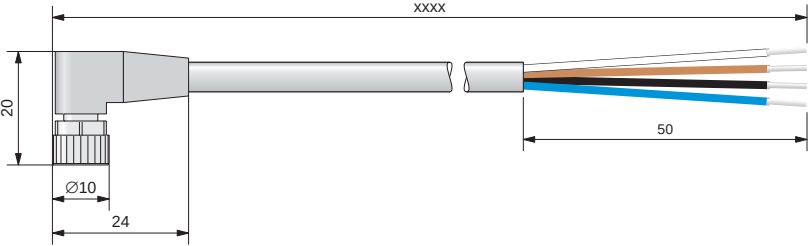

Dimensions				
				
Pin assignments				
4-pin M8 socket	Pin	Name	Wire colors	Open
	1	24 VDC	Brown	For custom wiring
	2	24 VDC	White	
	3	GND	Blue	
	4	GND	Black	

Table 565: X67CA0P30 module supply attachment cable - Measurements and pin assignments

Cable lengths			
Model number	Standard length [dm]	Actual length [cm]	Tolerance [cm]
X67CA0P30.0002	2	25	+2
X67CA0P30.0050	50	500	+10
X67CA0P30.0150	150	1500	+10
X67CA0P30.0500	500	5000	+10

Table 566: X67CA0P30 module supply attachment cable - Cable lengths

Both wires must be used due to the distribution of the current load.

2.6.7 X67CA0P40.xxxx

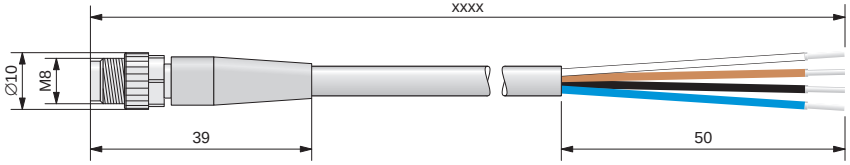

Dimensions				
				
Pin assignments				
4-pin M8 plug	Pin	Name	Wire colors	Open
	1	24 VDC	Brown	For custom wiring
	2	24 VDC	White	
	3	GND	Blue	
	4	GND	Black	

Table 567: X67CA0P40 module supply open cable - Measurements and pin assignments

Cable lengths			
Model number	Standard length [dm]	Actual length [cm]	Tolerance [cm]
X67CA0P40.0002	2	25	+2
X67CA0P40.0020	20	200	+10
X67CA0P40.0050	50	500	+10

Table 568: X67CA0P40 module supply open cable - Cable lengths

Both wires must be used due to the distribution of the current load.

2.6.8 X67CA0P50.xxxx

Dimensions				
Pin assignments				
4-pin M8 plug	Pin	Name	Wire colors	Open
	1	24 VDC	Brown	For custom wiring
	2	24 VDC	White	
	3	GND	Blue	
	4	GND	Black	

Table 569: X67CA0P50 module supply open cable - Measurements and pin assignments

Cable lengths			
Model number	Standard length [dm]	Actual length [cm]	Tolerance [cm]
X67CA0P50.0002	2	25	+2
X67CA0P50.0020	20	200	+10
X67CA0P50.0050	50	500	+10

Table 570: X67CA0P50 module supply open cable - Cable lengths

Both wires must be used due to the distribution of the current load.

2.6.9 X67CA3P00.xxxx

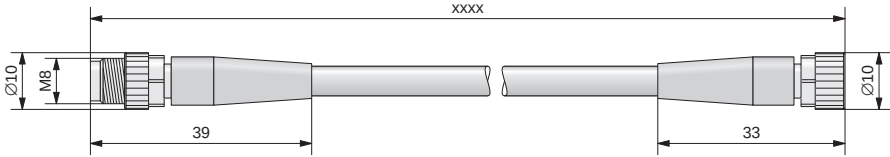


Dimensions				
				
Pin assignments				
4-pin M8 plug	Pin	Name	Wire colors	4-pin M8 socket
	1	24 VDC	Brown	
	2	24 VDC	White	
	3	GND	Blue	
	4	GND	Black	

Table 571: X67CA3P00 module supply connection cable - Measurements and pin assignments

Cable lengths			
Model number	Standard length [dm]	Actual length [cm]	Tolerance [cm]
X67CA3P00.0050	50	500	+10
X67CA3P00.0100	100	1000	+10

Table 572: X67CA3P00 module supply connection cable - Cable lengths

2.6.10 X67CA3P10.xxxx

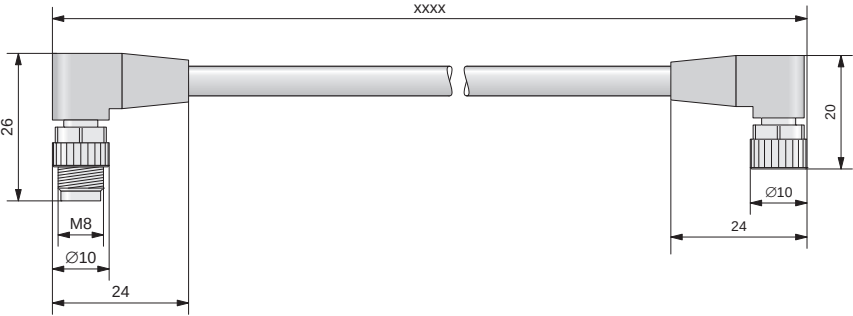


Dimensions				
				
Pin assignments				
4-pin M8 plug	Pin	Name	Wire colors	4-pin M8 socket
	1	24 VDC	Brown	
	2	24 VDC	White	
	3	GND	Blue	
	4	GND	Black	

Table 573: X67CA3P10 module supply connection cable - Measurements and pin assignments

Cable lengths			
Model number	Standard length [dm]	Actual length [cm]	Tolerance [cm]
X67CA3P10.0050	50	500	+10
X67CA3P10.0100	100	1000	+10

Table 574: X67CA3P10 module supply connection cable - Cable lengths

2.6.11 X67CA3P20.xxxx

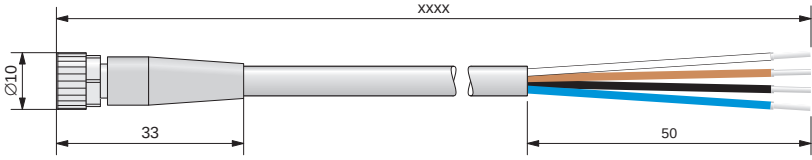

Dimensions				
				
Pin assignments				
4-pin M8 socket	Pin	Name	Wire colors	Open
	1	24 VDC	Brown	For custom wiring
	2	24 VDC	White	
	3	GND	Blue	
	4	GND	Black	

Table 575: X67CA3P20 module supply attachment cable - Measurements and pin assignments

Cable lengths			
Model number	Standard length [dm]	Actual length [cm]	Tolerance [cm]
X67CA3P20.0200	200	2000	+10

Table 576: X67CA3P20 module supply attachment cable - Cable lengths

Both wires must be used due to the distribution of the current load.

2.6.12 X67CA3P30.xxxx

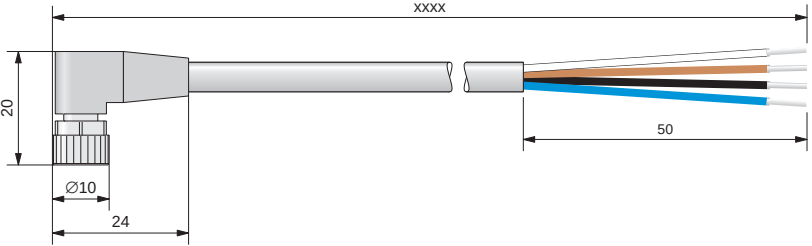

Dimensions				
				
Pin assignments				
4-pin M8 socket	Pin	Name	Wire colors	Open
	1	24 VDC	Brown	For custom wiring
	2	24 VDC	White	
	3	GND	Blue	
	4	GND	Black	

Table 577: X67CA3P30 module supply attachment cable - Measurements and pin assignments

Cable lengths			
Model number	Standard length [dm]	Actual length [cm]	Tolerance [cm]
X67CA3P30.0200	200	2000	+10

Table 578: X67CA3P30 module supply attachment cable - Cable lengths

Both wires must be used due to the distribution of the current load.