



Surge suppression module (20 kA transient)

Type CNW 703/...


Applications:

Protection device for use with new or existing equipment.
Efficient protection against high voltages, lightning strikes and transients.
Also provides RFI attenuation down to approximately 50 dB at 1 MHz.




Approvals	VDE 0565-3/ IEC 950/ UL 1283
Test voltage	L-N 2100 V,DC 1 s L/N-PE 2700 V,DC 1 s
Overload	1,5 x I _{Nom} 1 min / h
Climatic category	DIN IEC 68 Part 1 25/085/21

Schematic Circuit

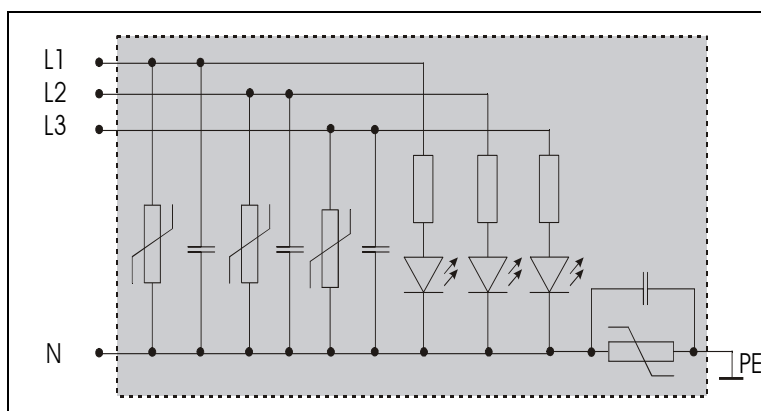

Typical insertion losses

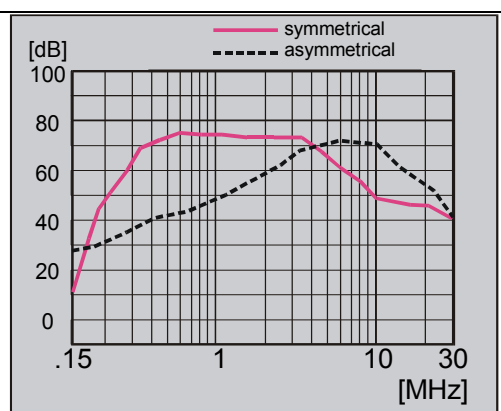


Technical data

Type	Rated voltage [V]	Surge current [kA]	Leakage current [mA]	ΣCx [μF]	ΣCy [μF]	R [kΩ]
CNW 703/20	3 x 400	3 x 20	<30	2,2	2,2	680

By installing the CNW 703 a path to earth is generated when higher than the normal supply line voltages are present. In this way control panel components and conductors are protected in the event of a lightning strike or switching transients.

Quite often additional mains filters are not required.

The CNW703 must be protected by using either a suitably rated fuse or MCB.
Protection should be fitted at the point of a reduction in conductor cross sectional area

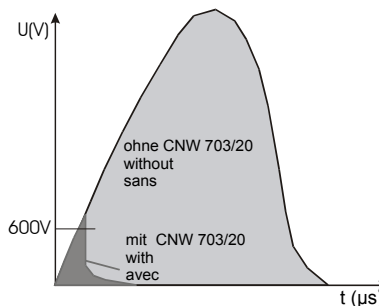


REO (UK) LTD

Units 8-10, Long Lane Industrial Estate
Craven Arms, Shropshire SY7 8DU
Tel: 01588 673411 Fax: 01588 672718
email: sales@reo.co.uk
www.reo.co.uk



Dimensions

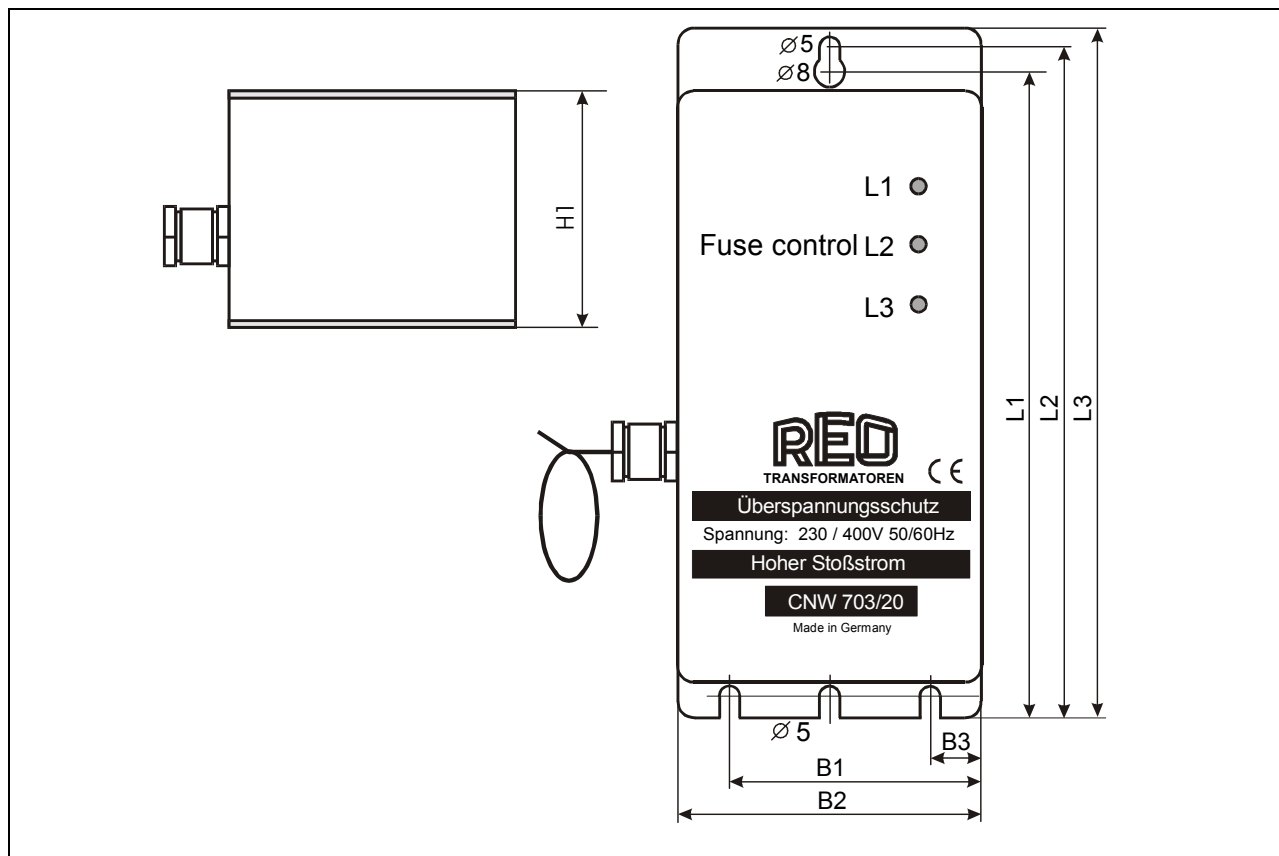

Type	B1 [mm]	B2 [mm]	B3 [mm]	H1 [mm]	L1 [mm]	L2 [mm]	L3 [mm]	Anschluß Connection Connexion
CNW 703/20	75	90	15	15	192	199,5	205	0,6 m / 5 x 6 mm ²