

3.2 6/12-pin terminal blocks TB06 / TB12

3.2.1 General information

The X20 24 VDC modules are wired using the TB06 and TB12 terminal blocks.

- Tool-free wiring with push-in technology
- Simple wire release using lever
- Ability to label each terminal
- Plain text labeling also possible
- Test access for standard probes
- Can be customer-coded

3.2.2 Order data

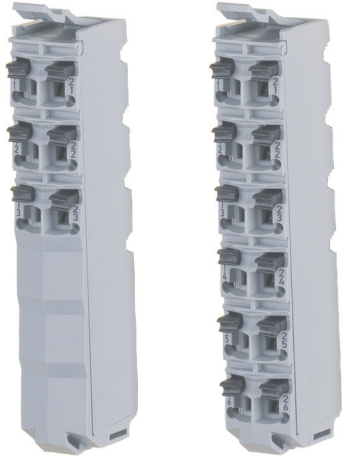
Model number	Short description	Figure
	Terminal block	
X20TB06	X20 terminal block, 6-pin, 24 V coded	
X20TB12	X20 terminal block, 12-pin, 24 V coded	
		X20TB06 X20TB12

Table 33: TB06/TB12 - Order data

3.2.3 Technical data

Product ID	TB06/TB12
Short description	
Terminal block 6-pin 12-pin	X20TB06 X20TB12
Terminal block	
Type of terminal	Push-in terminal
Distance between contacts Left - right Above - below	4.2 mm 10.96 mm
Contact resistance	$\leq 5 \text{ m}\Omega$
Rated voltage	230 VAC
Rated current ¹⁾	10 A / contact
Connection cross section Solid wire line Fine wire line With wire tip sleeves	0.08 mm ² - 2.5 mm ² / AWG 28 - 14 0.25 mm ² - 2.5 mm ² / AWG 24 - 14 0.25 mm ² - 1.5 mm ² / AWG 24 - 16 Up to 2x 0.75 mm ² with double wire tip sleeves
Cable type	Only copper wires (no aluminum wires!)

Table 34: TB06/TB12 - Technical data

1) Important - keep in mind the data limits for the I/O modules.