

Specifications

DIN VDE 0627
DIN VDE 0110

Approvals

  SEV, DNV,
BVS, CERCHAR, SABS

Inserts

Number of contacts	6, 10, 16, 24, 32 (2 x 16), 48 (2 x 24) + PE 16 A max.
Working current (see current carrying capacity)	
Working voltage	400 V
Test voltage U_{rms}	3 kV
Pollution degree	3 (C)
Insulation resistance	$\geq 10^{10} \Omega$
Material	Polycarbonate
Temperature range	- 40 °C ... +125 °C
Flammability acc. to UL 94	V 0
Mechanical working life	
- Mating cycles	≥ 500
Working voltage acc. to UL/CSA	600 V

Contacts

Material	copper alloy
Surface	
- hard-silver plated	3 μm Ag
- hard-gold plated	2 μm Au over 3 μm Ni
Contact resistance	$\leq 1 \text{ m}\Omega$
Crimp terminal	
- mm ²	0.5 - 4.0 mm ²
- AWG	20 - 12
Screw terminal	
- mm ²	2.5 mm ²
- AWG	14
- Tightening/test torque	0.5 Nm

Hoods/Housings

Material	GD-Al Si 8
Surface	powder-coated RAL 7037
Locking element	steel, zinc plated
Hoods/Housings sealing	NBR
Temperature range	- 40 °C ... +125 °C
Degree of protection acc. to DIN 40 050 for coupled connector	IP 65
Further selection of hoods/housings	chapter 30



Accessories

Crimping tools	chapter 12
Cable clamps	chapter 40
Coding of Hoods/Housings	chapter 40
Label acc. to CSA-approval	chapter 40
Han-Snap	chapter 11
Test connectors	chapter 20
Special insert fixing screws	chapter 20

Current carrying capacity


The current carrying capacity is limited by maximum temperature of materials for inserts and contacts including terminals. The current capacity-curve is valid for continuous, not interrupted current-loaded contacts of connectors when simultaneous power on all contacts is given, without exceeding the maximum temperature.

Control and test procedures according to DIN IEC 512-3.



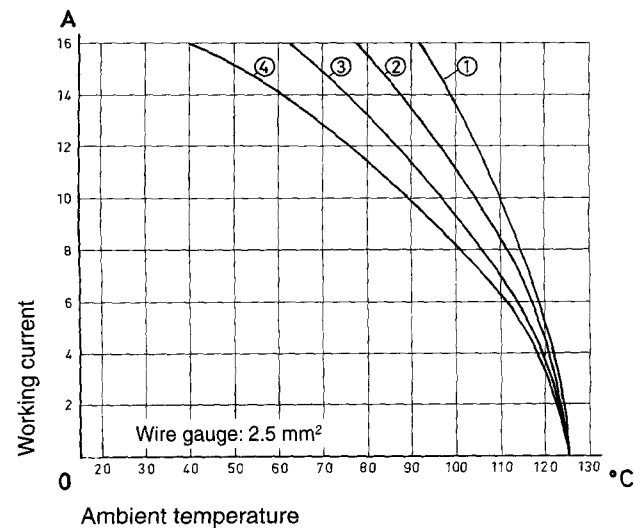
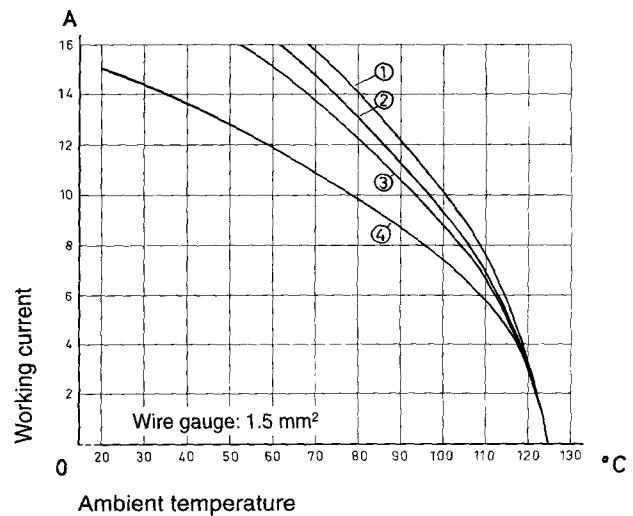


- ① Han 6 E
- ② Han 10 E
- ③ Han 16 E
- ④ Han 24 E


Number of contacts

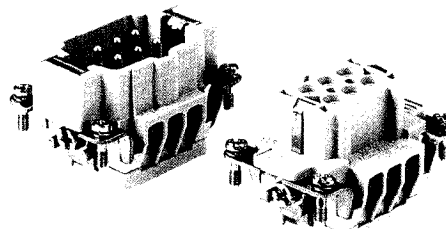 $6 + \textcircled{\text{土}}$ 

Inserts

Identification	Series	Male insert (M)	Female insert (F)
Screw terminal with wire protection	Han E		
		09 33 006 2601	09 33 006 2701
Cage-clamp terminal	Han ES		
		09 33 006 2616	09 33 006 2716
Cage-clamp terminal two terminals per contact	Han ESS		
		09 33 006 2672	09 33 006 2772
Crimp terminal Order contacts separately	Han E		
		09 33 006 2602	09 33 006 2702


Drawing Dimensions in mm

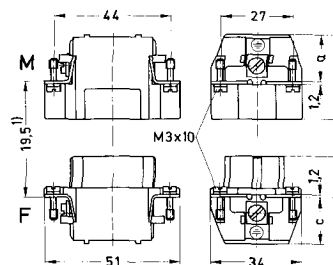


¹⁾ Distance for contact max. 21 mm

	a	b	c	d
Han E	20	35	21	37
Han ES	21	36	19	35
Han ESS	34	49	32	49

Contact arrangement View from termination side




Panel cut out for inserts
for use without hoods/housings



Identification	Wire gauge (mm ²)	Male contacts	Part No.	Female contacts
Crimp contacts	0.5	09 33 000 6121		09 33 000 6220
Power contacts	0.75	09 33 000 6114		09 33 000 6214
	1.0	09 33 000 6105		09 33 000 6205
silver plated	1.5	09 33 000 6104		09 33 000 6204
	2.5	09 33 000 6102		09 33 000 6202
	3	09 33 000 6106		09 33 000 6206
	4	09 33 000 6107		09 33 000 6207
	0.5	09 33 000 6122		09 33 000 6222
	0.75	09 33 000 6115		09 33 000 6215
gold plated	1.0	09 33 000 6118		09 33 000 6218
	1.5	09 33 000 6116		09 33 000 6216
	2.5	09 33 000 6123		09 33 000 6223
	4.0	09 33 000 6119		09 33 000 6221
Relay contact	0.75-1	09 33 000 6109		
silver plated	1.5	09 33 000 6110		
	2.5	09 33 000 6111		

Drawing Dimensions in mm

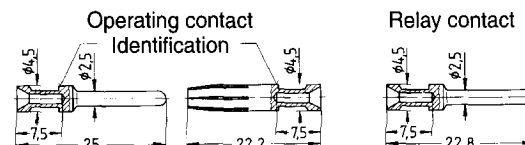

Crimp contact identification










Identification	Wire gauge		Stripping length
no groove	0.5 mm ²	AWG 20	7.5 mm
1 groove*	0.75 mm ²	AWG 18	7.5 mm
1 groove	1 mm ²	AWG 18	7.5 mm
2 grooves	1.5 mm ²	AWG 16	7.5 mm
3 grooves	2.5 mm ²	AWG 14	7.5 mm
wide groove	3.0 mm ²	AWG 12	7.5 mm
no groove	4 mm ²	AWG 12	7.5 mm

* on the back crimp collar

Standard Hoods with 1 lever on the housing

Size 6 B













Identification	Part No.		Pg	Drawing	Dimensions in mm
	Low construction	High construction			
Hoods side-entry  	09 30 006 1540		13.5		
	09 30 006 1541		16		
		09 30 006 0542	21		
		09 30 006 0543	29		
Hoods top-entry  	09 30 006 1440		13.5		
	09 30 006 1441		16		
		09 30 006 0442	21		
		09 30 006 0443	29		
Protection covers metal  	09 30 006 5401				
	09 30 006 5423				

Standard Housings with 1 lever on the housing

Size 6 B



Identification		Part No.		Pg	Drawing	Dimensions in mm
Housings bulkhead mounting						Panel cut out 48 x 35 cm
		09 30 006 0301		—		
	with thermo- plastic cover	09 30 006 0302		—		
	with metal cover	09 30 006 0318		—		
Housings surface mounting						
	1 side-entry	09 30 006 1251		16		
	2 side-entries	09 30 006 1291	09 30 006 0292 09 30 006 0293	16 21 29		
	1 side-entry	09 30 006 1256	with thermo- plastic cover	16		
	with metal cover	09 30 006 2256		16		
	2 side-entries	09 30 006 1296	with thermo- plastic cover	16 21 29		
	with metal cover	09 30 006 2296	with thermo- plastic cover	16 21 29		
	2 side-entries		09 30 006 0297 09 30 006 0298	16 21 29		
			with metal cover	16 21 29		
			with metal cover	16 21 29		
Protection covers metal						
		09 30 006 5404				
		09 30 006 5425				
Hoods cable to cable						
		09 30 006 1750		13.5		
			09 30 006 0752 09 30 006 0753	21 29		
Protection cover metal						
		09 30 006 5427			