


Hose



Hose Assemblies, Bulk Hose, and End Connections

- PTFE-lined, stainless steel braided
- Metal flexible
- Multipurpose push-on
- Thermoplastic
- Conductive core

Multipurpose Push-On Hose (PB Series)

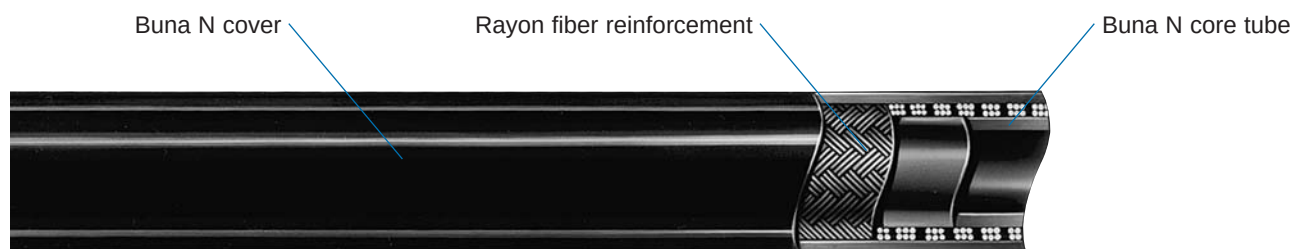

Features

- Cover is flame-resistant in accordance with 30CFR, Part 18.
- Single-braid rayon fiber reinforcement is woven for maximum strength and end connection retention.
- Stainless steel and brass end connections are available in 1/4 to 3/4 in. and 6 to 18 mm sizes.
- End connections are reusable.
- Assembly does not require clamps or special tools.
- Hose is available in blue, black, green, gray, red, and yellow.

Technical Data

Nominal Hose Size in. (mm)	Minimum Bend Radius ^① in. (cm)	Temperature Range °F (°C)	Working Pressure at 70°F (20°C) psig (bar)	Minimum Burst Pressure at 70°F (20°C) psig (bar)
1/4 (6.4)	2.50 (6.35)	-40 to 200 (-40 to 93)	350 (24)	1400 (96.4)
3/8 (9.7)	3.00 (7.62)		300 (20)	1200 (82.6)
1/2 (12.7)	5.00 (12.7)		300 (20)	1200 (82.6)
3/4 (19.0)	7.00 (17.8)		300 (20)	1200 (82.6)

① Measured to inside of bend.

Pressure-Temperature Ratings

Ratings maintain a minimum factor of 4:1 between working pressure and minimum burst pressure.

Nominal Hose Size,	1/4	3/8, 1/2, 3/4
Temperature °F (°C)	Working Pressure psig (bar)	
-40 (-40)	350 (24)	300 (20)
70 (20)	350 (24)	300 (20)
100 (37)	315 (21.7)	270 (18.6)
150 (65)	210 (14.4)	180 (12.4)
200 (93)	100 (6.8)	80 (5.5)

Cleaning and Packaging

Swagelok PB series multipurpose push-on hose components are cleaned in accordance with *Swagelok Specification SC-10*. Each hose is bagged individually and boxed; longer hoses are coiled, bagged, and boxed.

⚠ Caution:
Do not reuse hose.

Ordering Information and Dimensions

Bulk Multipurpose Push-On Hose

To order a 250 ft (76 m) reel of standard blue hose, select an ordering number.

Example: **PB-4**

For hose of another color, add a hose color designator.

Example **PB-4-BK**



Nominal Hose Size in.	Ordering Number
1/4	PB-4
3/8	PB-6
1/2	PB-8
3/4	PB-12

Reels may contain more than one piece of hose.

Hose Color	Designator
Black	-BK
Gray	-GY
Green	-GR
Red	-RD
Yellow	-YW


Multipurpose Push-On Hose End Connections

Select a basic ordering number and add **SS** for 316 SS or **B** for brass.

Example: **SS-PB4-SL4**

To determine the length to cut bulk hose for field assembly, subtract dimension *B* for each end connection from the desired overall assembly length.

Dimensions are for reference only and are subject to change.

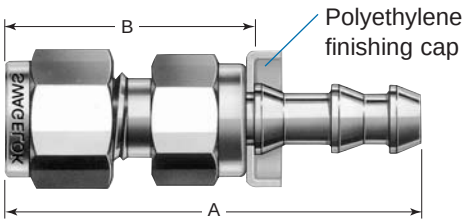

Swagelok Tube Fittings



Fitting Size in.	Nominal Hose Size in.	Basic Ordering Number	Maximum Outside Dimension, Hex Flat	Dimensions in. (mm)	
				A	B
1/4	1/4	-PB4-SL4	9/16 in.	1.97 (50.0)	1.21 (30.7)
3/8	3/8	-PB6-SL6	3/4 in.	2.11 (53.6)	1.24 (31.5)
1/2	1/2	-PB8-SL8	7/8 in.	2.47 (62.7)	1.42 (36.1)

Dimensions shown with Swagelok nuts finger-tight.

Tube Adapters



Tube OD	Nominal Hose Size	Basic Ordering Number	Maximum Outside Diameter	A	B
Dimensions, in. (mm)					
1/4	1/4	-PB4-TA4	0.68 (17.3)	1.93 (49.0)	1.17 (29.7)
3/8	3/8	-PB6-TA6	0.84 (21.3)	2.03 (51.6)	1.16 (29.5)
1/2	1/2	-PB8-TA8	0.99 (25.1)	2.47 (62.7)	1.42 (36.1)
3/4	3/4	-PB12-TA12	1.27 (32.3)	3.14 (79.8)	1.48 (37.6)
Dimensions, mm (in.)					
6	1/4 in.	-PB4-TM6	17.3 (0.68)	49.0 (1.93)	29.7 (1.17)
8		-PB4-TM8		48.8 (1.92)	29.5 (1.16)
10	3/8 in.	-PB6-TM8	21.3 (0.84)	52.1 (2.05)	30.0 (1.18)
12		-PB6-TM10		51.6 (2.03)	29.5 (1.16)
18	1/2 in.	-PB8-TM12	25.1 (0.99)	62.7 (2.47)	36.1 (1.42)
18	3/4 in.	-PB12-TM18	32.3 (1.27)	79.8 (3.14)	37.6 (1.48)

Male Pipe Threads



Pipe Size in.	Nominal Hose Size in.	Basic Ordering Number	Maximum Outside Diameter in. (mm)	Dimensions in. (mm)	
				A	B
Male NPT					
1/4	1/4	-PB4-PM4	0.68 (17.3)	1.68 (42.7)	0.92 (23.4)
	3/8	-PB6-PM4	0.84 (21.3)	1.80 (45.7)	0.93 (23.6)
-PB6-PM6					
1/2	1/2	-PB8-PM8	0.99 (25.1)	2.19 (55.6)	1.14 (29.0)
3/4	3/4	-PB12-PM12	1.27 (32.3)	2.81 (71.4)	1.15 (29.2)
Male BSP/ISO Tapered					
1/4	1/4	-PB4-MT4	0.68 (17.3)	1.68 (42.7)	0.92 (23.4)
3/8	3/8	-PB6-MT6	0.84 (21.3)	1.80 (45.7)	0.93 (23.6)
1/2	1/2	-PB8-MT8	0.99 (25.1)	2.19 (55.6)	1.14 (29.0)
3/4	3/4	-PB12-MT12	1.27 (32.3)	2.81 (71.4)	1.15 (29.2)

Unions




Nominal Hose Size in.	Basic Ordering Number	Maximum Outside Diameter in. (mm)	Dimensions in. (mm)	
			A	B
1/4	-PB4-6	0.68 (17.3)	2.07 (52.6)	0.55 (14.0)
3/8	-PB6-6	0.84 (21.3)	2.25 (57.2)	0.51 (13.0)
1/2	-PB8-6	0.99 (25.1)	2.61 (66.3)	
3/4	-PB12-6	1.27 (32.3)	3.83 (97.3)	

Multipurpose Push-On Hose Assembly



1. Cut a clean, square edge on end of hose.



2. Cover first barb of end connection with hose. (Lubricating fitting stem with light oil [10W40] may ease assembly.)



3. Hold end connection against flat surface. Grip hose and push with a steady force until hose seats into blue finishing cap.

⚠ Ensure hose is pushed fully into finishing cap.

⚠ Do not use a hose clamp.

Multipurpose Push-On Hose Disassembly



1. Slit hose lengthwise from blue finishing cap to end of barb. Do not damage barbs.



2. Bend hose to expose barbs, then remove hose with a quick pull.

⚠ Do not reuse hose.

Assembly and disassembly illustrated with old-style, round-body Swagelok tube adapter end connections.

Tools



Hose Cutter

For use with push-on hose or soft plastic tubing.

Ordering number: **MS-HC-SC**

See *Custom Assemblies*, next page, for assembled hoses.