

Evolution Power supply 3-phase, primary switched IN: 360-520VAC OUT: 22-28V/20ADC

Output voltage: 22...28 V DC

Input voltage: 3 x 360...520 V AC / 480...745 V DC

Current: 20 A

Image

- stable output voltage, short-circuit and overload protected
- Wide voltage input
- touch protected acc. to (EN 60529) IP20

Input

Input voltage	3 x 360...520 V AC / 480...745 V DC
Input current	1.3 A
Inrush current after 1 ms	<= 19 A
Primary fusing	3 x 10 A
Frequency	50/60 Hz

Output

Output voltage	24 V DC (SELV), $\pm 1\%$; 22...28 V adjustable
Nominal output current	20 A (+55 °C); 15.8 A (+70 °C)
Efficiency	0.9
Mains failure bridging	>= 19 ms (400 V AC)
Ripple	<= 50 mV eff
Spikes	<= 100 mV ss
Protection	overload and short-circuit protected
LED display	LED (green) = OK; LED (red) = overload
Parallel usage/serial usage	yes/yes

General data

Standards	(EN 60950-1), (EN 61204-3), (EN 55011 A)
Temperature range	-25...+70 °C (storage temperature -40...+85 °C)
Relative humidity	5...95 %, no condensation
Mounting method	for DIN-rail mounting (TH35) acc. to EN 60715
Weight	2.0 kg
Dimensions H x W x D	132 x 113 x 136 mm


Commercial data

Gross weight	700
Net weight	700
Weight unit	gram
Basic unit	pc.
Customs tariff number	85044081
Unit (piece)	1
Limited value	1

Comments

MCS switch mode power supplies meet the (EN 61000-3-2) standard for harmonic current.

Circuit diagram

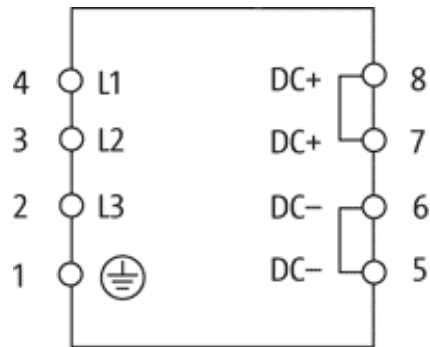

Dimension drawing

